

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










PHD CONNECTOR

2.0mm pitch/Disconnectable Crimp style connectors



This is a 2.0mm pitch, crimp style, doublerow, wire-to-board connector. It is designed to meet the demand for highdensity and low-profile connection.

- Compact
- Reliable contacts
- Fully shrouded header

Specifications -

• Current rating: 3A AC, DC (AWG #22)

• Voltage rating: 250V AC, DC

• Temperature range: -25°C to +85°C

(including temperature rise in applying

electrical current)

• Contact resistance: Initial value/ 10m Ω max.

After environmental testing/ 20m Ω max.

• Insulation resistance: 1,000M Ω min. • Withstanding voltage: 800V AC/minute • Applicable wire: AWG #28 to #22


Applicable PC board thickness: 1.6mm


- * Compliant with RoHS.
- * Refer to "General Instruction and Notice when using Terminals and Connectors" at the end of this catalog.
- * Contact JST for details.

Standards -


Recognized E60389


Top entry type





Side entry type






Note: 1. The above figure is the figure viewed from soldering side.

- 2. Tolerances are non-cumulative: ± 0.05 mm for all centers.
- 3. Hole dimensions differ according to the kind of PC board and piercing method. If PC boards made of hard material are used, the hole dimensions should be larger. The dimensions above should serve as a guideline. Contact JST for details.

Contact

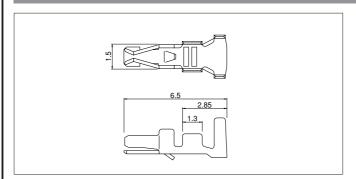

Contact	Crimping	Applicator			
Contact	machine	Crimp applicator	Dies	Crimp applicator with dies	
SPHD-002T-P0.5	AP-K2N	MKS-L-10	MK/SPHD-002-05	APLMK SPHD002-05	
3F11D-0021-F0.5		*MKS-SC-10	SC/SPHD-002-05	APLSC SPHD002-05	

Note:	*Strip-crimp	applicat	or

Madal Na	Applica	ble wire	Insulation O.D.	Q'ty /	
Model No.	mm²	AWG #	(mm)	reel	
SPHD-002T-P0.5	0.08~0.21	28~24	0.9~1.5	8.000	
SPHD-001T-P0.5	0.13~0.33	26~22	1.0~1.5	0,000	

Material and Finish


Phosphor bronze, tin-plated (reflow treatment)

RoHS compliance

Contact	Crimping machine	Applicator			
Contact		Crimp applicator	Dies	Crimp applicator with dies	
SPHD-001T-P0.5	ΔP-K2NI	MKS-L-10	MK/SPHD-001-05	APLMK SPHD001-05	
3FHD-0011-F0.5	AI TIZIN	*MKS-SC-10	SC/SPHD-001-05	APLSC SPHD001-05	

PHD CONNECTOR

Housing

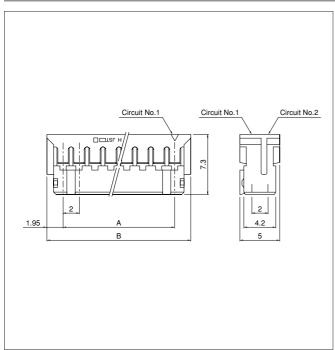

Cinarrita	Ma dal Nia	Dimensi	Q'ty /		
Circuits	Model No.	Α	В	bag	
8	PHDR-08VS	6.0	9.9	1,000	
10	PHDR-10VS	8.0	11.9	1,000	
12	PHDR-12VS	10.0	13.9	1,000	
14	PHDR-14VS	12.0	15.9	1,000	
16	PHDR-16VS	14.0	17.9	1,000	
18	PHDR-18VS	16.0	19.9	1,000	
20	PHDR-20VS	18.0	21.9	1,000	
22	PHDR-22VS	20.0	23.9	1,000	
24	PHDR-24VS	22.0	25.9	1,000	
26	PHDR-26VS	24.0	27.9	1,000	
28	PHDR-28VS	26.0	29.9	1,000	
30	PHDR-30VS	28.0	31.9	1,000	
32	PHDR-32VS	30.0	33.9	1,000	
34	PHDR-34VS	32.0	35.9	1,000	

PA 66, UL94V-0, natural (white)

Material

RoHS compliance

<For reference> As the color identification,

the following alphabet shall be put in the underlined part.


For availability, delivery and minimum order quantity, contact JST.

ex. PHDR-10VS

S...natural (white)

K...black Y...yellow E...blue R...red

Shrouded header

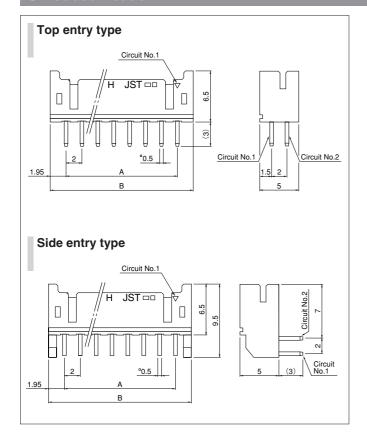

		Model No.				Dimensions		Q'ty / box	
Ci	Circuits	Glass-filled nylon		Nylon		(mm)		Q ty / DOX	
		Top entry type	Side entry type	Top entry type	Side entry type	Α	В	Top entry type	Side entry type
	8	B8B-PHDSS	S8B-PHDSS	_	_	6.0	9.9	500	500
	10	B10B-PHDSS	S10B-PHDSS	B10B-PHDSS-B	S10B-PHDSS-B	8.0	11.9	500	500
	12	B12B-PHDSS	S12B-PHDSS	B12B-PHDSS-B	S12B-PHDSS-B	10.0	13.9	500	500
	14	B14B-PHDSS	S14B-PHDSS	B14B-PHDSS-B	S14B-PHDSS-B	12.0	15.9	500	250
	16	B16B-PHDSS	S16B-PHDSS	B16B-PHDSS-B	S16B-PHDSS-B	14.0	17.9	500	250
	18	B18B-PHDSS	S18B-PHDSS	B18B-PHDSS-B	S18B-PHDSS-B	16.0	19.9	500	250
	20	B20B-PHDSS	S20B-PHDSS	B20B-PHDSS-B	S20B-PHDSS-B	18.0	21.9	250	250
	22	B22B-PHDSS	S22B-PHDSS	B22B-PHDSS-B	S22B-PHDSS-B	20.0	23.9	250	250
	24	B24B-PHDSS	S24B-PHDSS	B24B-PHDSS-B	S24B-PHDSS-B	22.0	25.9	250	200
	26	B26B-PHDSS	S26B-PHDSS	B26B-PHDSS-B	S26B-PHDSS-B	24.0	27.9	250	200
	28	B28B-PHDSS	S28B-PHDSS	B28B-PHDSS-B	S28B-PHDSS-B	26.0	29.9	250	200
	30	B30B-PHDSS	S30B-PHDSS	B30B-PHDSS-B	S30B-PHDSS-B	28.0	31.9	250	200
	32	B32B-PHDSS	S32B-PHDSS	B32B-PHDSS-B	S32B-PHDSS-B	30.0	33.9	250	200
	34	B34B-PHDSS	S34B-PHDSS	B34B-PHDSS-B	S34B-PHDSS-B	32.0	35.9	250	200

Material and Finish

Post: Copper alloy, copper-undercoated, tin-plated (reflow treatment) Wafer: Glass-filled PA 66, UL94V-0, natural (ivory) PA 66, UL94V-0, natural (white)

RoHS compliance This product displays (LF)(SN) on a label.

<For reference> As the color identification, the following alphabet shall be put in the underlined part.

For availability, delivery and minimum order quantity, contact JST.

ex. B10B-PHDSS

S...natural (ivory)

ex. B10B-PHDSS-B

S...natural (white)

K...black Y...yellow E...blue R...red