

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







22 x 13 LM1575X, LM1577X Inductor 150 uHy 3.0 ADC

Inductor designed for use with National Semiconductor Regulators:

LM1575-XX / LM2575-XX LM1577-XX / LM2577-XX

## **ELECTRICAL SPECS:**


1: INDUCTANCE: @ 10 kHz, 0.1 Vrms (1 thru 3 to 4 thru 6) = 135 - 165 uHy

2: DCRs: (1 thru 3 to 4 thru 6) = 0.060 Ohms Max.

3: Temp Class - 130 C

4: HIPOT: 250 VDC

Winding to core (2 Sec., 5 mA Max)

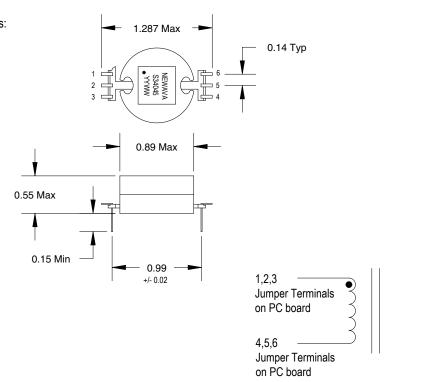

A	2/20/0	)3		KAM	Production Re	Production Release				
REV.	DATE		ECN	BY		DESCRIPTION				
TOLERANCES ON XXX ANGLE					Newaya	Newaya Tech.		150 oil by Indicator		
+ -	.XXX + - +		X +	ANGLE -	Watertown, S	Watertown, SD 57201		150 uHy Inductor 3.0 ADC		
				DATE	005-88	605-886-0264		0.07.20		
DRAWN:					SCALE	MODEL	DRAWING NO.		REV.	
CHECKED:							C2404E		٨	
APPROVED: -				- KAN	M NEXT ASSY:	NEXT ASSY: S34045		)	Ι.Υ	
THIS PRINT MUST NOT BE COPIED IN WHOLE OR IN PART						OR USED DETRIMENTALLY TO OUR INTEREST		SHEET 1 O	F1	

Specifications at room temperature of 25 C.