

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# Silicon Power Rectifier S/R35PF Series

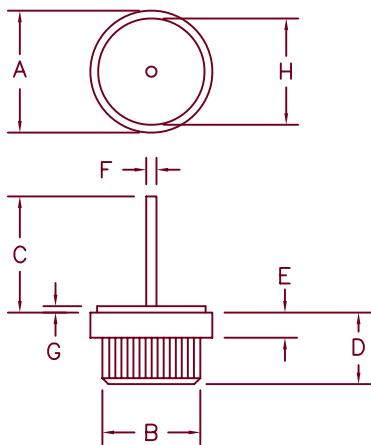

Dim.	Inches		Millimeter		
	Minimum	Maximum	Minimum	Maximum	Notes
A	.590	.630	15.0	16.0	Dia.
B	.499	.510	12.6	13.0	Dia.
C	.600	—	15.2	—	—
D	.350	.370	8.90	9.40	
E	.090	.130	2.28	3.30	
F	.045	.053	1.14	1.35	Dia.
G	.030	.035	.762	.900	
H	.500	.510	12.7	13.0	Dia.

DO-21 (DO-208)

Microsemi Catalog Number	JEDEC Number	Repetitive Peak Reverse Voltage	
S3520PF	1N3491, 1N3659	50V	<ul style="list-style-type: none"> <li>High Voltage, Low Leakage Current</li> <li>Glass Passivated Die</li> <li>Soft Recovery</li> <li>400 Amps Surge Rating</li> <li><math>V_{RRM}</math> to 600V</li> </ul>
	1N3492, 1N3660	100V	
	1N3493, 1N3661	200V	
	1N3494, 1N3662	300V	
	1N3495, 1N3663	400V	
S3540PF	1N3664	500V	
	1N3665	600V	
S3560PF			

For Reverse Polarity change the "S" prefix of Microsemi part number to "R". Add "R" suffix to the JEDEC part number to specify reverse polarity.

Electrical Characteristics		
Average Forward Current (standard polarity)	$I_F(AV)$ 35 Amps	$T_C = 133^\circ C$ , half sine wave, $R_{\theta JC} = 1.0^\circ C/W$
Average Forward Current (reverse polarity)	$I_F(AV)$ 35 Amps	$T_C = 92^\circ C$ , half sine wave, $R_{\theta JC} = 2.0^\circ C/W$
Maximum Surge Current	$I_{FSM}$ 400 Amps	8.3ms, half sine, $T_J = 175^\circ C$
Maximum $I^2t$ For Fusing	$I^2t$ 665 A <sup>2</sup> s	
Max. Peak Forward Voltage	$V_{FM}$ 1.1 Volts	$I_{FM} = 35A$ ; $T_J = 25^\circ C$ *
Max. Peak Reverse Current	$I_{RM}$ 10 $\mu$ A	$V_{RRM}, T_J = 25^\circ C$
Max. Peak Reverse Current	$I_{RM}$ 2.0 mA	$V_{RRM}, T_J = 150^\circ C$
Max. Recommended Operating Frequency	10kHz	

\*Pulse test: Pulse width 300  $\mu$ sec. Duty cycle 2%

Thermal and Mechanical Characteristics		
Storage temp range	$T_{STG}$	-65°C to 175°C
Operating junction temp range	$T_J$	-65°C to 175°C
Max thermal resistance (standard polarity)	$R_{\theta JC}$	1.0°C/W Junction to case
Max thermal resistance (reverse polarity)	$R_{\theta JC}$	2.0°C/W Junction to case
Typical thermal resistance	$R_{\theta CS}$	0.2°C/W Case to sink
Typical Weight		0.3 ounce (9.0 grams) typical

# S/R35PF

Figure 1  
Typical Forward Characteristics

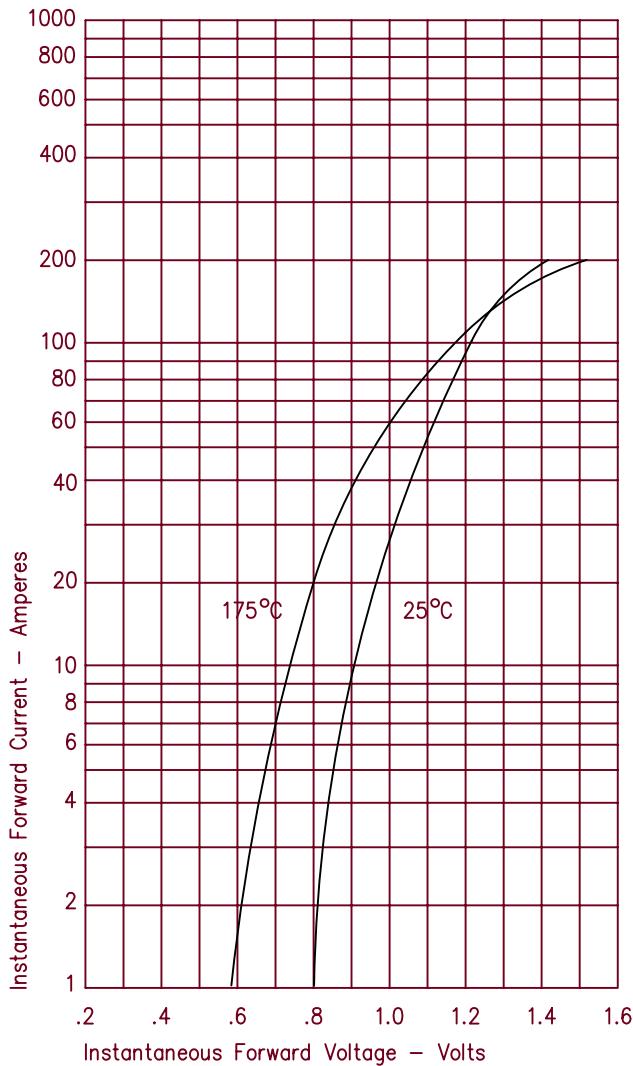


Figure 2  
Typical Reverse Characteristics

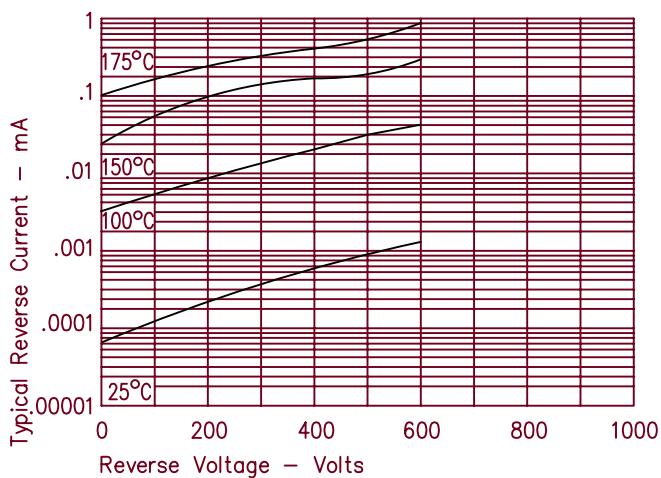


Figure 3  
Forward Current Derating – Standard Polarity

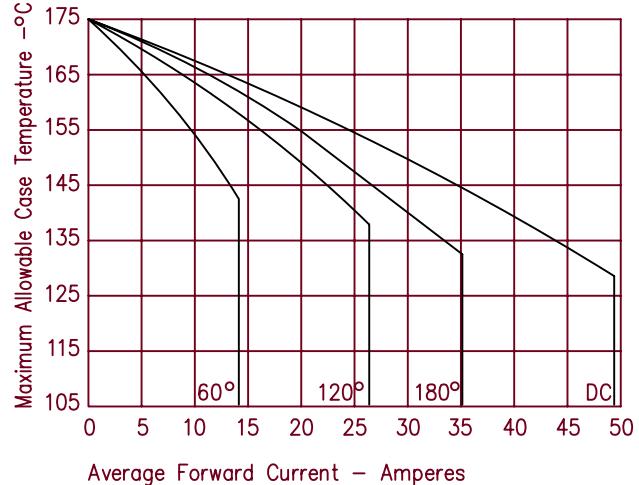


Figure 4  
Maximum Forward Power Dissipation – Standard Polarity


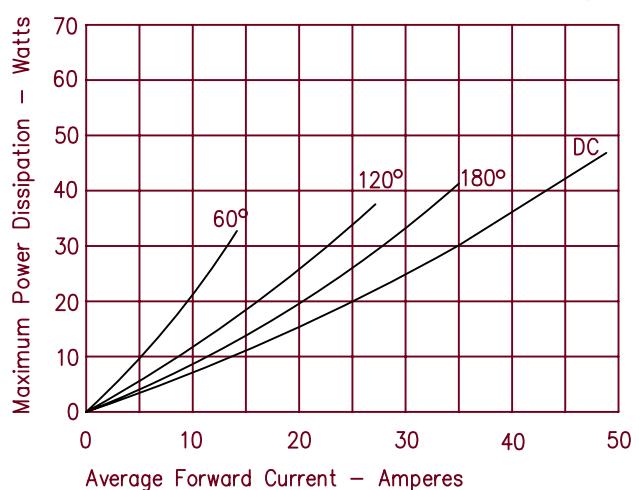


Figure 5  
Forward Current Derating – Reverse Polarity

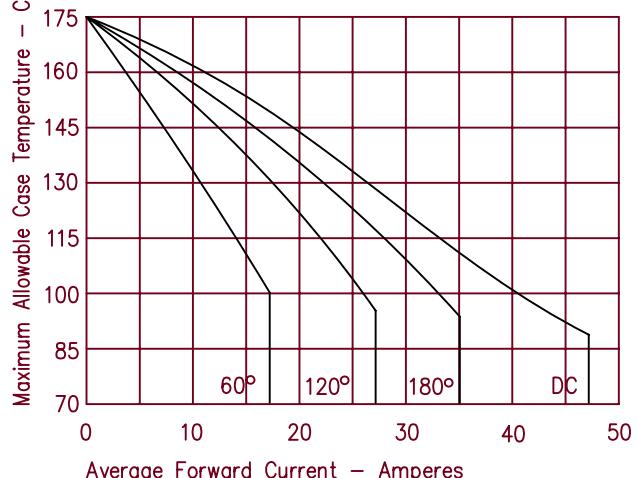

# S/R35PF

Figure 6  
Maximum Forward Power Dissipation – Reverse Polarity

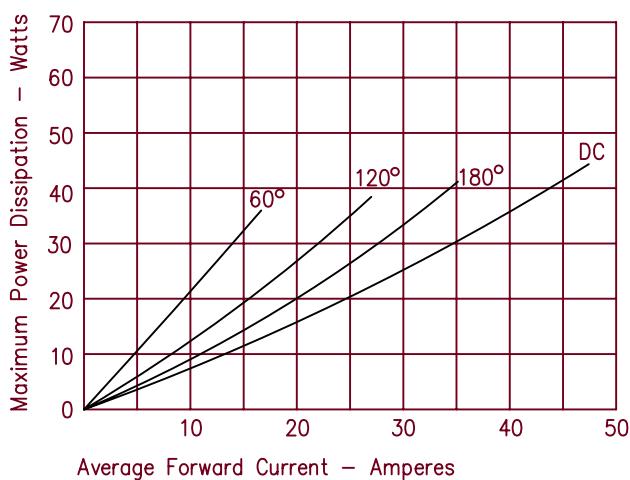


Figure 7  
Transient Thermal Impedance – Standard Polarity

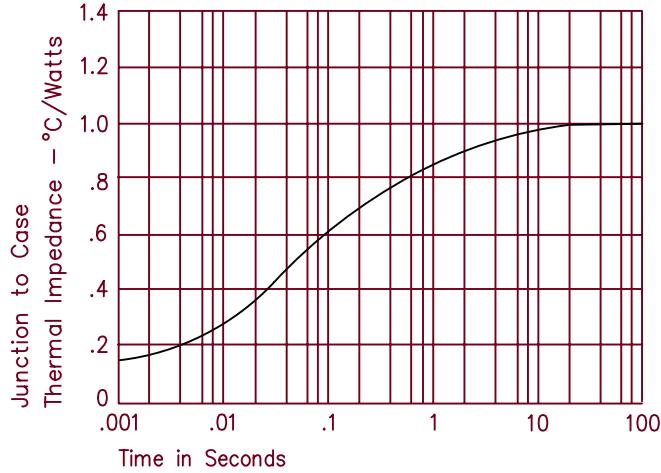


Figure 8  
Transient Thermal Impedance – Reverse Polarity


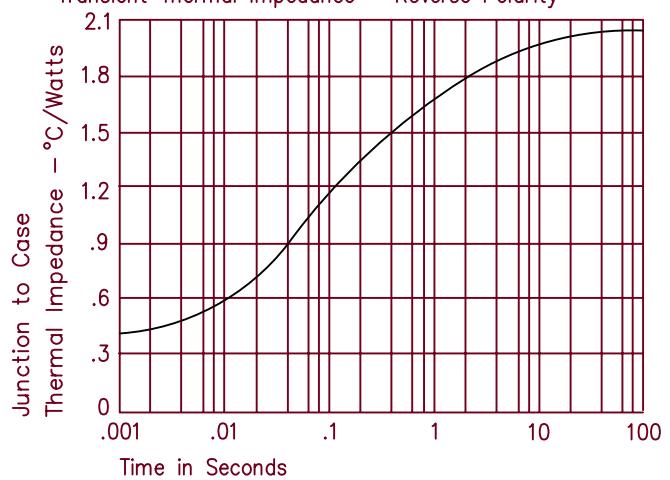


Figure 9  
Maximum Nonrepetitive Surge Current



## HEAT SINK MOUNTING

The hole edge must be chamfered as shown to avoid shearing off the knurl during press-in. Apply press-in force evenly to avoid tilting. Thermal compound is recommended. Recommended heat sink materials are aluminum with a hardness below 65 on Brinell scale or copper with a hardness below 50 on the Rockwell F scale.

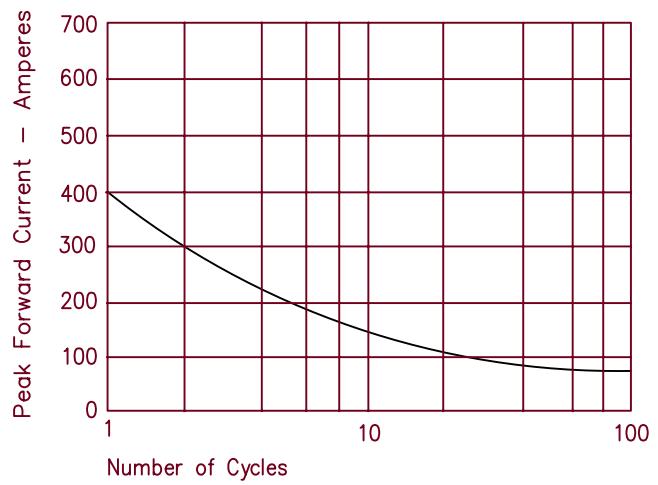