



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com



Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	CONDUCTOR SIZE	A +/- .08	D +/- .010	E +/- .010	PANDUIT DIE COLOR CODE PANDUIT DIE INDEX NUMBER (BURNDY DIE INDEX NUMBER)
SA6-X	#6	1.62	0.34	0.20	GRAY DIE P29 (346)
SA4-XR	#4	1.88	0.47	0.27	GREEN DIE P37 (375)
SA2-X	#2	2.00	0.53	0.31	PINK DIE P42 (348)
SA1-X	#1	2.00	0.53	0.35	GOLD DIE P45 (471)
SA1/0-X	1/0	2.12	0.64	0.39	TAN DIE P50 (296)
SA2/0-5	2/0	2.31	0.69	0.44	OLIVE DIE P54 (297)
SA3/0-5	3/0	2.62	0.76	0.48	RUBY DIE P60 (467)
SA4/0-5	4/0	2.72	0.88	0.55	WHITE DIE P66 (298)
SA250-5	250 kcmil	2.94	0.91	0.59	RED DIE P71 (324)
SA300-2	300 kcmil	3.12	1.01	0.65	BLUE DIE P76 (470)
SA350-2	350 kcmil	3.38	1.11	0.72	BROWN DIE P87 (299)
SA400-2	400 kcmil	3.75	1.19	0.76	GREEN DIE P94 (472)
SA500-2	500 kcmil	3.81	1.32	0.84	PINK DIE P99 (300)
SA600-2	600 kcmil	4.12	1.44	0.92	BLACK DIE P106 (473)
SA750-1	750 kcmil	4.62	1.59	1.03	RED DIE P125 (301)
SA800-1	800 kcmil	4.75	1.66	1.06	GRAY DIE P140 (474)
SA1000-1	1000 kcmil	5.25	1.84	1.19	BROWN DIE P161 (302)

- NOTES:
- 1. MATERIAL: SEAMLESS ALUMINUM TUBING, TIN PLATED
 - 2. BARREL COLOR CODED WITH DIE SET INDEX NUMBER
 - 3. FOR STRANDED ALUMINUM AND COPPER WIRE
 - 4. UL LISTED & CSA CERTIFIED TEMPERATURE RATED 90° C (AL9CU)
 - 5. UL LISTED & CSA CERTIFIED VOLTAGE RATING 35 KV
 - 6. ALL DIMENSIONS IN INCHES

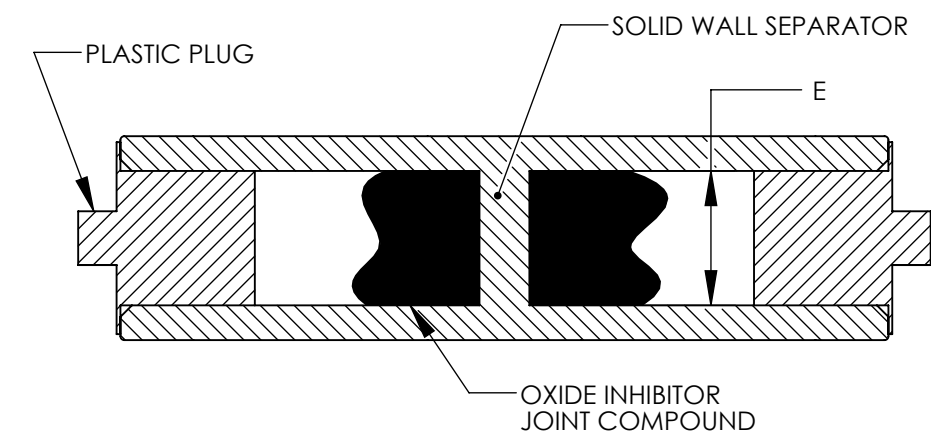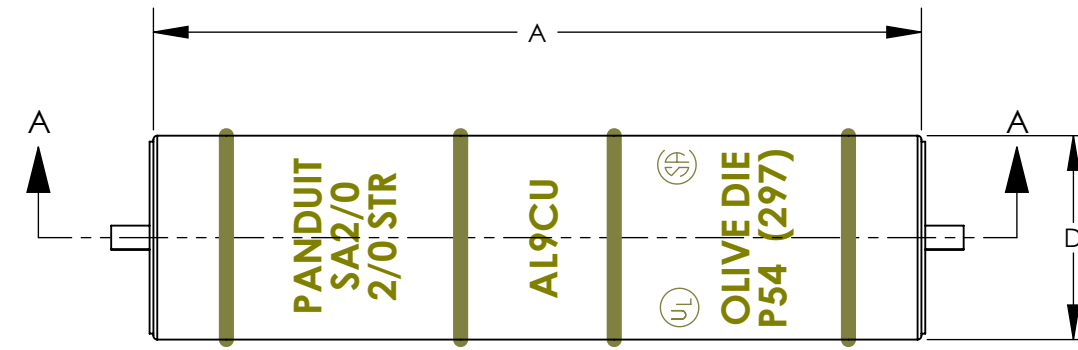

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
03	3/15	JHNU	JHNU	RGB	REVISED DIMENSIONS, REVISED NOTES ADDED BARREL MARKINGS ADDED COLOR CODE/DIE INDEX NUMBER REMOVED SA4-X, ADDED SA4-XR	N41256BA-C41256
02	3/13	JHNU	JHNU	RGB	CONVERTED DWG TO SOLIDWORKS MOVED SA300-SA1000 FROM DWG C41219 REVISED TITLE BLOCK	N41256BA-C41256

TITLE SA SERIES ALUMINUM SPLICES CUSTOMER DRAWING	
ITEM REVISION NAME N41256BA-C41256/03	
DATASET FILE NAME C41256/03.SLDDRW	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]	
.X ±	.XXX ±
.XX ±	ANGLES ±
	THIRD ANGLE PROJECTION
DRAWN BY EJD	MATERIAL SEE NOTES
DATE 6/00	DRAWING NUMBER C41256
CHK SKB	SCALE NONE
SHEET 1 OF 1	SIZE B