



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SB120E-G thru SB1100E-G "-G" : RoHS Device

Voltage Range: 20 to 100 V

Current: 1.0 A




FEATURES

- Low drop down voltage
- 1.0A operation at TA=75°C with no thermal runaway
- For use in low voltage, high frequency invertors free wheeling and polarity protection
- Silicon epitaxial planar chips
- Electrostatic discharge (ESD) test under IEC61000-4-2: standard: >15KV (air) & >8KV (contact)
- Lead-free part, meet RoHS requirements

MECHANICAL DATA

- Case: Molded plastic body DO-41
- Epoxy: UL94-V0 rated flame retardant
- Terminals: Solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end
- Mounting Position: Any
- Weight: 0.012 ounces, 0.34 grams

DO-41

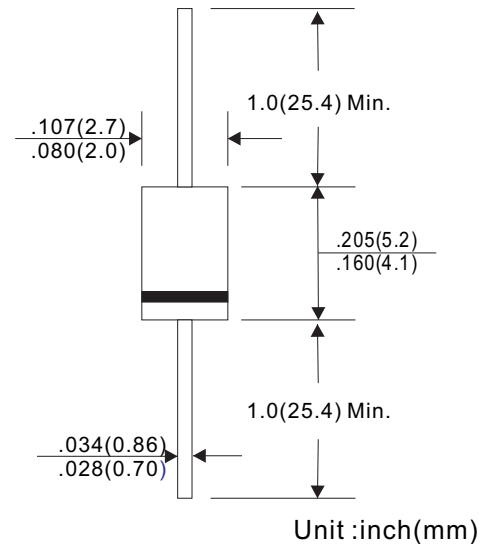

MAXIMUM RATING AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified

	Symbols	120E	140E	145E	150E	160E	180E	1100E	Units
Maximum Recurrent Peak Reverse Voltage	VRRM	20	40	45	50	60	80	100	Volts
Maximum RMS Voltage	VRMS	14	28	30	35	42	56	70	Volts
Maximum DC Blocking Voltage	VDC	20	40	45	50	60	80	100	Volts
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at TA=75°C, See Figure 1	IAV	1.0							Amps
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load (JEDEC Method) TL=110°C	IFSM	30							Amps
Maximum Forward Voltage at 1.0A (Note 1)	VF	0.50		0.70		0.85		Volts	
Maximum DC Reverse Current at Rated DC Blocking Voltage	IR	0.5							mA
TA= 25°C TA=100°C		10			5				
Typical Junction Capacitance (Note 2)	CJ	110							pF
Typical Thermal Resistance (Note 3)	RθJA RθJL					80.0 30.0		°C/W	
Operating Junction Temperature Range	TJ	-65 ~ +125			-65 ~ +150				°C
Storage Temperature Range	TSTG	-65 ~ +150							°C

Note 1. Pulse test: 300µS pulse width, 1% duty cycle

2. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts

3. Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted 0.375" (9.5mm) lead length

RATINGS AND CHARACTERISTIC CURVES SB120E-G thru SB1100E-G

Fig. 1 - Forward Current Derating Curve

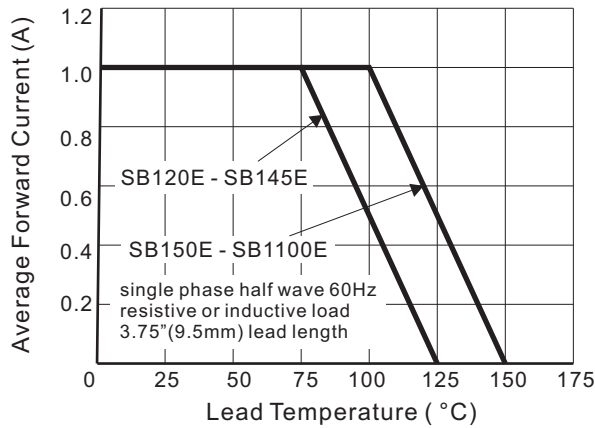


Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current

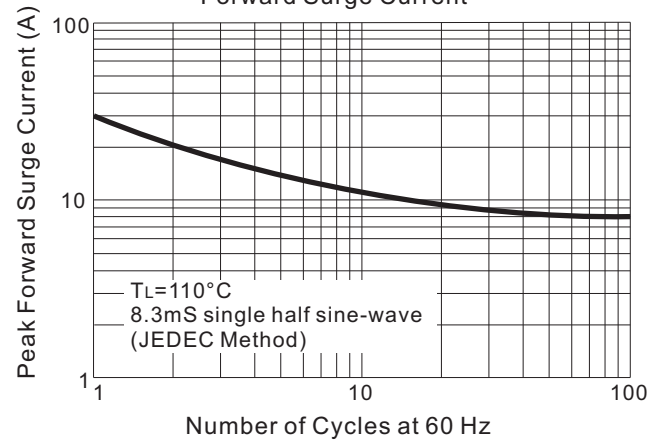


Fig. 3 - Typical Instantaneous Forward Characteristics

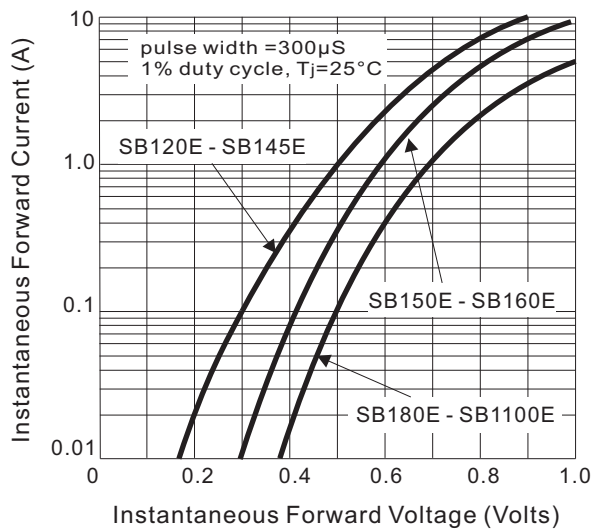


Fig. 4A - Typical Reverse Characteristics

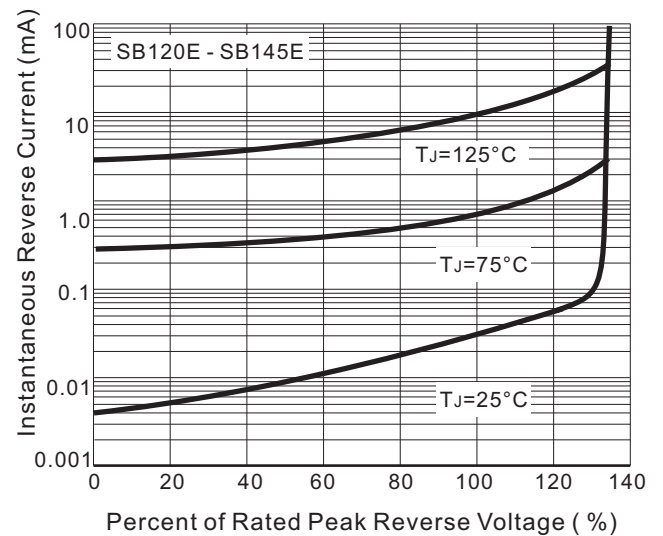


Fig. 5 - Typical Junction Capacitance

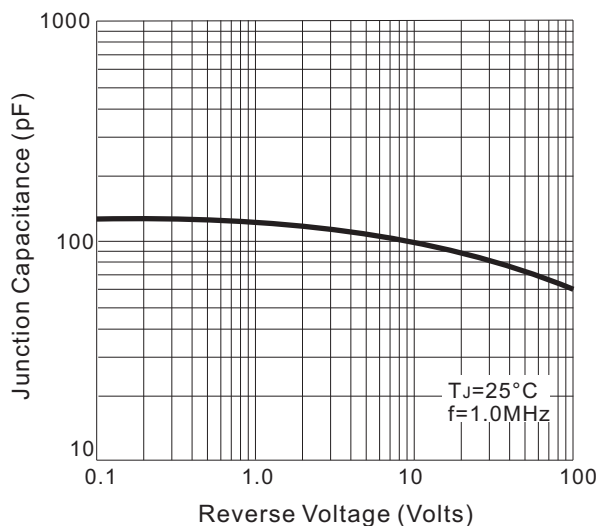


Fig. 4B - Typical Reverse Characteristic

