



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SC-ISOSLICE-3

ISOLATED BUS I/O MODULE



- 4 off 3-wire RTD PT100 Inputs
- Communicates to Ethernet / RS232 or RS485 network via an SC-E-100 unit
- Input/Output/Power Supply Isolation
- Automatic Bus & Power Connection Via DIN Rail Bus Connector
- Multiple inputs in one module
- Very High Accuracy, Low Cost

The SC-ISOSLICE-3 isolated Bus I/O module combines full three-port isolation with access to an industrial bus. This bus connects to the E-100 modules which are then used to transmit the process values via either an Ethernet or a RS232/485 wired communications network.

Full 3-port isolation is standard but for channel to channel isolation please see the SC-ISOSLICE-1

The input range can be user selected using simple DIL switches inside the unit and the unit is factory calibrated for four different input ranges. These are 0 to 100°C, -100 to +100°C, 0 to 400°C and 0 to 800°C.

Non-interactive zero and span controls make adjustment and calibration of the unit quick and simple.

The units have a wide ranging 12 to 36 Vdc. This supply can either be wired to the appropriate terminals or picked up automatically from the Bus connector.

Input Types for SC-ISOSLICE-3

3-Wire RTD PT100 x 4

0 to 100°C
 -100 to +100°C
 0 to 400°C and
 0 to 800°C.

Min & Max Full Scale Ranges are:

| | | |
|--------------|---------|---------|
| PT100 3-Wire | -200 °C | +850 °C |
|--------------|---------|---------|

Outputs

For Output Modules see SC-ISOSLICE-6 or SC-ISOSLICE-8

Technical Specifications

| Parameter | Min | Typ | Max | Comments |
|---------------------------------------|----------------|--------|----------------------|---|
| Supply Voltage | 12V | 24V | 36Vdc | |
| Supply Current (mA) | | 45 | 90 | For 24Vdc supply (260mA for 50ms on start-up) |
| Bus Connection | | | | 16-bit bus connection |
| Volt Drop (mA input) | | 0.3 | | At 20mA Input |
| Input Impedance (Volt) | | 1MΩ | | Dependant on range (typ=10V) |
| Input Impedance (mA) | | 15Ω | | Dependant on range (typ=20mA) |
| Output Linearity Error | | ±0.01% | ±0.05% | |
| Temp Coefficient | | | ±50ppm/°C | |
| Time Constant (10-90%) | | 200mS | | |
| Operating Ambient | 0°C | | 55°C | |
| Relative Humidity | 0% | | 90% | |
| Isolation Voltage ^{see note} | 1kV | | | |
| Surge Voltage | 2.5kV for 50μS | | Transient of 10kV/μS | |

Notes


Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection. Accuracy figures based on 24Vdc supply, 4-20mA output with 250Ω load and an ambient 20°C.

Installation Data

| | |
|----------------------|---------------------------------|
| Mounting | DIN Rail TS35 |
| Orientation | Any |
| Connections | Screw Clamp with pressure plate |
| Conductor Size | 0.5-4.0mm |
| Insulation Stripping | 12mm |
| Weight | Approx 95g |

Ordering Information

Part No.: SC-ISOSLICE-3

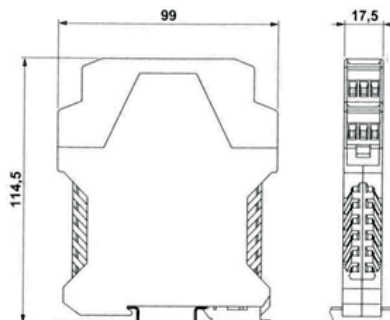

| Part Number | Universal Inputs | mA or V Inputs | RTD Inputs | T/C Inputs | Analogue Outputs | Digital Inputs | Digital Outputs |
|---------------|------------------|----------------|------------|------------|------------------|----------------|-----------------|
| SC-ISOSLICE-1 | 2 | | | | | | |
| SC-ISOSLICE-2 | | 8 | | | | | |
| SC-ISOSLICE-3 | | | 4 | | | | |
| SC-ISOSLICE-4 | | | | 4 | | | |
| SC-ISOSLICE-5 | | | | | | 8 | |
| SC-ISOSLICE-6 | | | | | | | 4 |
| SC-ISOSLICE-7 | | | | | | 2 x freq in | |
| SC-ISOSLICE-8 | | | | | 4 | | |
| SC-ISOSLICE-9 | 4 x AC I/V | | | | | | |

Cynergy3 Components Ltd.
 7 Cobham Road
 Ferndown Industrial Estate
 Wimborne, Dorset BH21 7PE
 Telephone +44 (0) 1202 897969
 Email:sales@cynergy3.com

ISO9001 CERTIFIED

SC-ISOSLICE-3 2017



Made in the UK

www.cynergy3.com