



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SC-ISOSLICE-8

ISOLATED BUS I/O MODULE



- 4 off Analogue Outputs
- Communicates to Ethernet / RS232 or RS485 network via an SC-E-100 unit
- Automatic Bus & Power Connection Via DIN Rail Bus Connector
- Multiple inputs in one module
- Very High Accuracy, Low Cost

Output Types for SC-ISOSLICE-8

Analogue Outputs x 4

Each analogue output can be set to either 4-20mA or 0-10Vdc. Other options are available, please enquire.

Field calibration or adjustment can be achieved using the front panel pushbuttons and multi-coloured LED.

The 4-20mA outputs are current source into a maximum 750Ω load impedance.

When 0-10V outputs are used, the minimum load impedance is 100kΩ

The SC-ISOSLICE-8 isolated Bus I/O module combines full three-port isolation with access to an industrial bus. This bus connects to the SC-E-100 modules which are then used to transmit the process values via either an Ethernet or a RS232/485 wired communications network.

Full 3-port isolation is standard.

The analogue output type can be selected using the internal DIP switches between either 4-20mA or 0-10V.

The unit is factory calibrated for 4-20mA or 0-10V but user calibration or adjustment can be done in use using the front panel pushbuttons and LED.

Each output is controlled via Modbus commands to the SC-E-100 coordinator or can be linked to an analogue input channel from an input SC-ISOSLICE.

The units have a wide ranging 12 to 36 Vdc. This supply can either be wired to the appropriate terminals or picked up automatically from the Bus connector.

Technical Specifications

Parameter	Min	Typ	Max	Comments
Supply Voltage	12V	24V	36Vdc	
Supply Current (mA)		45	90	For 24Vdc supply (260mA for 50ms on start-up)
Bus Connection				16-bit bus connection
Load Impedance (mA)			750Ω	Dependant on range (max=20mA)
Output Linearity Error		±0.01%	±0.05%	
Temp Coefficient			±50ppm/°C	
Load Resistance Error			±5ppm/Ω	0 < RL < 750Ω
Time Constant (10-90%)		60mS (normal)		
Operating Ambient	0°C		55°C	
Relative Humidity	0%		90%	
Isolation Voltage ^{see note}	1kV			
Surge Voltage	2.5kV for 50μS		Transient of 10kV/μS	

Notes


Absolute maximum ratings indicate sustained limits beyond which damage to the device may occur. Device is protected against reverse polarity connection. Accuracy figures based on 24Vdc supply, 4-20mA output with 250Ω load and an ambient 20°C.

Installation Data

Mounting	DIN Rail TS35
Orientation	Any
Connections	Screw Clamp with pressure plate
Conductor Size	0.5-4.0mm
Insulation Stripping	12mm
Weight	Approx 95g

Ordering Information

Part No.: SC-ISOSLICE-8

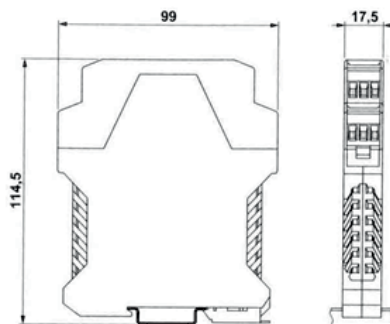

Part Number	Universal Inputs	mA or V Inputs	RTD Inputs	T/C Inputs	Analogue Outputs	Digital Inputs	Digital Outputs
SC-ISOSLICE-1	2						
SC-ISOSLICE-2		8					
SC-ISOSLICE-3			4				
SC-ISOSLICE-4				4			
SC-ISOSLICE-5						8	
SC-ISOSLICE-6							4
SC-ISOSLICE-7						2 x freq in	
SC-ISOSLICE-8					4		
SC-ISOSLICE-9	4 x AC I/V						

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email:sales@cynergy3.com

ISO9001 CERTIFIED

SC-ISOSLICE-8 2017



Made in the UK

www.cynergy3.com