

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









SNAP CONNECT E10

Embedded SNAP Connect Appliance

The SNAP® Connect E10 is a rugged, powerful, embedded connectivity appliance built to interface directly with SNAP mesh networks. The E10 can collect data from SNAP devices for centralized storage, database processing or application monitoring, making it extremely easy to view or control devices over the Internet. The E10 bridges SNAP networks across TCP/IP.

The flexibility of an open, Linux-based design provides a wide range of *supported connectivity options*, such as flash drives, using the built-in Ethernet and USB 2.0 host ports.

Full Linux services are also available to administrators and natively hosted applications.

Benefits at a Glance:

- Control & monitor SNAP networks remotely
- Supports LAN & WAN remote administration using Synapse Portal (Free Download)
- Includes SNAP Connect Software & License
- Linux OS Services fully accessible
- 32-bit, RISC architecture, CPU running at 400MHz
- 256 MB Flash, expandable through external USB drives
- 64 MB RAM
- RP-SMA external antenna
- Synapse RF Engine, 2.4GHz, IEEE 802.15.4
- 10/100 Mb Ethernet port & USB 2.0 port
- 5% to 95% relative humidity, non condensing
- -40°C to +85°C standard (operating), -55°C to +125°C (Storage)

Part Numbers:

SLE10-001 2.4 GHz operation

SLE10M-001 2.4 GHz operation with international transmit


power levels and up to 2Mbps radio rate

SLE10-868-001 868 MHz operation **SLE10-900-001** 900MHz operation



SNAP CONNECT E10

Embedded SNAP Connect Appliance

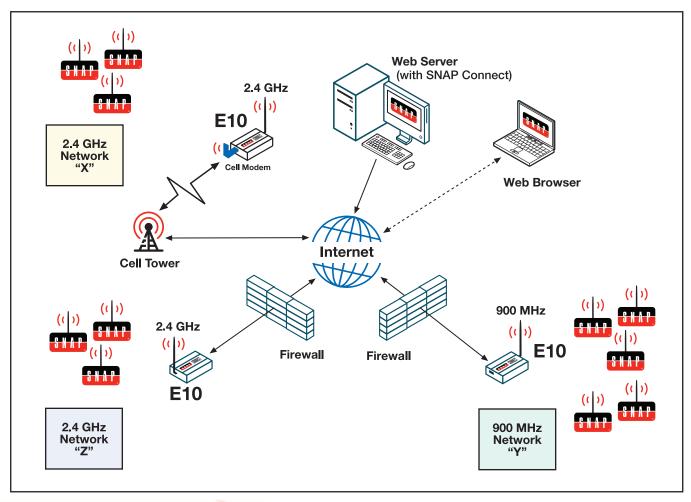

SNAP® Connect E10 Appliance

Connects SNAP networks to the Internet using built-in Ethernet or USB Cell modem or Wi-Fi adapter. Shown here, the web browser can monitor and control three remote SNAP networks in real time.

Part Numbers:

SLE10-001 2.4 GHz operation

SLE10M-001 2.4 GHz operation with international transmit

power levels and up to 2Mbps radio rate

SLE10-868-001 868 MHz operation **SLE10-900-001** 900MHz operation

SYNAPSE Wireless, Inc.

500 Discovery Drive · Huntsville, Alabama 35806 877-982-7888 · synapse-wireless.com