



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










Model: SC Series


Spring Clamp Terminals

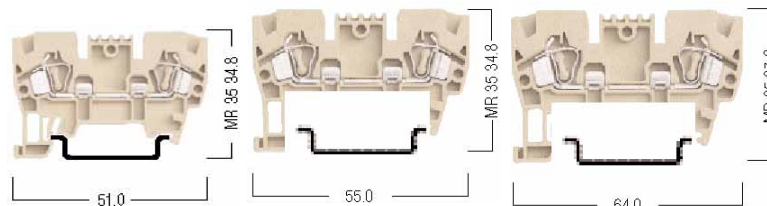




Description

Spring clamp terminals provide a realistic alternative to terminal blocks with screw clamp connection in many fields of application. The spring clamp is operated by using a screwdriver to provide an access to wire through the opening in the spring clamp. The wire end gets clamped onto the current bar on removal of screwdriver. SC type spring clamp terminals decrease the mounting and revision costs relative to screw type terminals. Interlocking mechanism on the plastic housing prevents terminal blocks being separated from each other when the cables are connected.



	SC 2.5 width: 5mm		SC 4 width: 6mm		SC6 width: 8mm		
Electrical ratings							
Voltage/Current/Cross section	750V~/28A/2.5mm ²		750V~/46A/4mm ²		750V~/46A/6mm ²		
UL	600V/20A/12AWG		600V/20A/10AWG		600V/35A/8AWG		
Insulation stripping length	10mm		12mm		13mm		
Connection Data							
Solid Strand, Screw Connection	0.5-2.5mm ²		0.5-4mm ²		0.5-6mm ²		
Fine Strand, Screw Connection	0.5-2.5mm ²		0.5-4mm ²		0.5-6mm ²		
AWG Conductor	26.....12		26.....10		26.....8		
Ordering Data	Cat. No	Qty	Cat. No	Qty	Cat. No	Qty	
Poliamide 6.6	SC2.5BEIGE	50	SC4	50	SC6 width: 8mm	100	
	SC2.5BLUE	50	SC4BLUE	50			
	SC2.5GREEN	50	SC4GREEN	50			
	SC2.5YELLOW	50	SC4YELLOW	50			
	SC2.5RED	50	SC4RED	50			
	SC2.5GREY	50	SC4BGREY	50			
Mounting Rails	Type	Cat. No	Qty	Type	Cat. No	Qty	
MR 35 X 7.5 Slotted	MR 35 X 15 Slotted	Slotted ERS35	1m	Slotted ERS35	1m	Slotted ERS35	1m
		Slotted ERS35-HPP	1m	Slotted ERS35-HPP	1m	Slotted ERS35-HPP	1m
ERS35	ERS35-HPP						
End Bracket	Cat. No	Qty	Cat. No	Qty	Cat. No	Qty	
 ES1 For 35mm Din	ES4BEIGE	100	ES4BEIGE	100	ES4BEIGE	100	
End Plate							
Thickness 1.5mm EP Poliamide 6.6	EPS2.5	100	EPS4	100	ESPS6	100	
							
Cross-Connection							
	CCS2.5/2	25	CCS4/2	25			
	CCS2.5/3	20	CCS4/3	20			
	CCS2.5/4	15	CCS4/4	20			
	CCS2.5/10	5	CCS4/10	5			
Group Marking	GM	GMBEIGE	50	GMBEIGE	50	GMBEIGE	50
							



SC 10 width: 10mm	
Electrical ratings	
Voltage/Current/Cross section	750V~/63A/10mm ²
UL	600V/50A/6AWG
Insulation stripping length	13mm
Connection Data	
Solid Strand, Screw Connection	0.5-10mm ²
Fine Strand, Screw Connection	0.5-10mm ²
AWG Conductor	26.....6
Ordering Data	
Poliamide 6.6	Cat. No Qty SC10 100
Mounting Rails	
MR 35 X 7.5 Slotted MR 35 X 15 Slotted	Type Cat. No Qty
 ERS35	Slotted ERS35 1m
 ERS35-HPP	Slotted ERS35-HPP 1m
End Bracket	
 ES1 For 35mm Din	ES4BEIGE 100
End Plate	
Thickness 1.5mm EP Poliamide 6.6	EPS10 100
Cross-Connection	
	
Group Marking	
 GM	GMBEIGE 50