Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!

Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832
Email & Skype: info@chipsmall.com Web: www.chipsmall.com
Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

SC1206

SMD POWER INDUCTORS



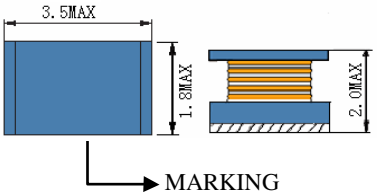







● Features
1. Open frame construction.
2 Low DCR
3 Excellent Power Density
4 Engineered to Provide High Efficiency

CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (3) (A)	Temperature Current (4) (A)
SC1206-R12	0.12	1MHZ	112m	0.97	1.60
SC1206-R22	0.22	1MHZ	140m	0.85	1.35
SC1206-R47	0.47	1MHZ	210m	0.70	1.08
SC1206-1R0	1.0	1MHZ	364m	0.51	0.78
SC1206-2R2	2.2	1MHZ	533m	0.43	0.66
SC1206-4R7	4.7	1MHZ	845m	0.34	0.58
SC1206-100	10	1MHZ	1.69	0.23	0.40
SC1206-220	22	1MHZ	3.90	0.16	0.25
SC1206-470	47	1MHZ	10.40	0.10	0.15
SC1206-101	100	1MHZ	15.60	0.08	0.12

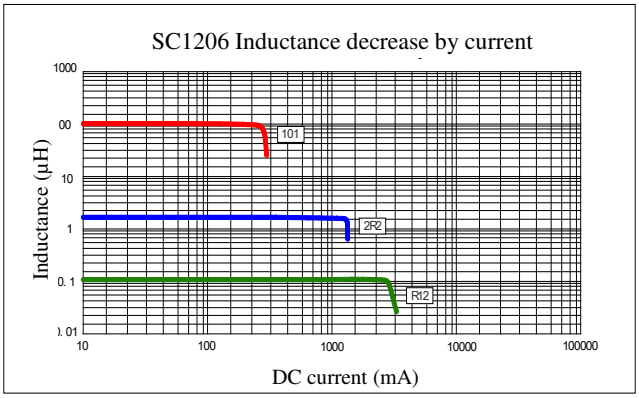

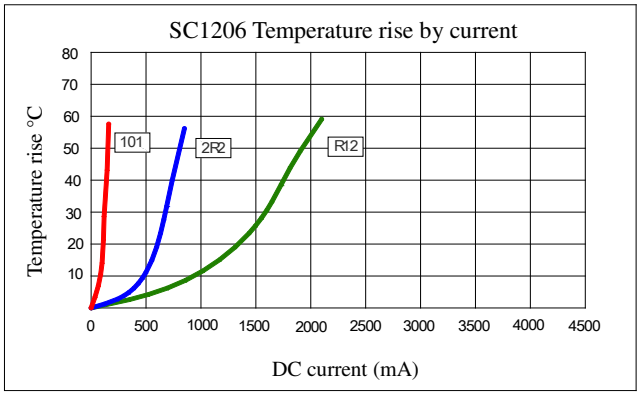

(1). Inductance tolerance for 0.12uH~0.47uH: ±30%, for 1.0uH~4.7uH: ±20%, for 10uH~100uH: ±10%. Tested at 0.25V, 0ADC and 25℃
(2). DCR measured at 25℃.
(3). The DC current at which the inductance decreases by 10% from its initial value.
(4). The DC current that results in a 40℃ temperature rise from 25℃ambient.

Click here for QUANTITY PER REEL & PACKING INFORMATION

Custom versions available upon request.

©2011 Signal Transformer –Specification subject to change without notice. 07.11

Signal Transformer
www.signaltransformer.com
500 Bayview Avenue, Inwood, NY 11096
Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208
Sales@signaltransformer.com • techhelp@signaltransformer.com