



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



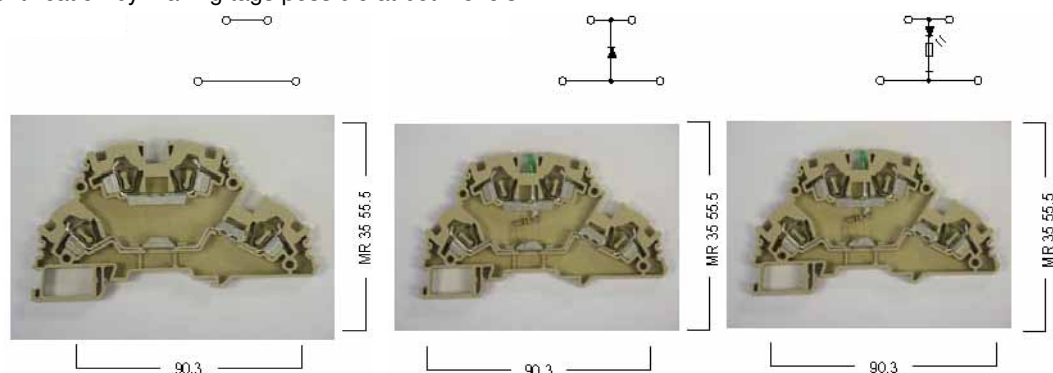
Model: SCD 4 Series





Double-Deck Spring Terminals**Description**

Double level spring terminals are the answer to high wiring density problems posed by certain unavoidable wiring arrangements.

This double level terminals have the following advantages:

- Double wiring density available without extension mounting rails
- Interconnection/jumpers can be done at both levels
- Marking/identification by making tags possible at both levels.



	SCD4 width: 6mm			SCD4D width: 6mm			SCD 4LD width: 6mm			
Electrical ratings										
Voltage/Current/Cross section		750V~/30A/4mm²			750V~/30A/4mm²			750V~/30A/4mm²		
UL/cUL		600V~/20A			600V~/20A			600V~/20A		
Insulation stripping length		12mm			12mm			12mm		
Connection Data										
Solid Strand, Screw Connection		0.75-4mm²			0.75-4mm²			0.75-4mm²		
Fine Strand, Screw Connection		0.75-4mm²			0.75-4mm²			0.75-4mm²		
AWG Conductor		26.....10			26.....10			26.....10		
Ordering Data		Cat. No	Qty		Cat. No	Qty		Cat. No	Qty	
Polyamide 6.6		SCD4BEIGE 50			SCD4DBEIGE 20			SCD4LDBEIGE24AC	20	
								SCD4LDBEIGE24DC	20	
								SCD4LDBEIGE110AC	20	
Electrical ratings										
Didoe Reverse Voltage					1000V					
Diode Current					1A					
Mounting Rails										
MR 35 X 7.5 Slotted		Type	Cat. No	Qty	Type	Cat. No	Qty	Type	Cat. No	Qty
MR 35 X 15 Slotted		Slotted	ERS35	1m	Slotted	ERS35	1m	Slotted	ERS35	1m
		Slotted	ERS35-HPP	1m	Slotted	ERS35-HPP	1m	Slotted	ERS35-HPP	1m
End Bracket		Cat. No	Qty		Cat. No	Qty		Cat. No	Qty	
 ES1 For 35mm Din		ES4BEIGE 25			ES4BEIGE 25			ES4BEIGE 25		
Cross-Connection										
		CCS4/2	25		CCS4/2	25		CCS4/2	25	
		CCS4/3	20		CCS4/3	20		CCS4/3	20	
		CCS4/4	15		CCS4/4	15		CCS4/4	15	
		CCS4/10	5		CCS4/10	5		CCS4/10	5	
Group Marking										
 GM		GMBEIGE 50			GMBEIGE 50			GMBEIGE 50		