



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALL DIMENSIONS ARE IN (mm)						
Part Number	Wire Size	Wire Class	Wire Strip Length	$l \pm 2.76$	$o \pm .50$	$i \pm .50$
SCMSX10-C	10 mm ²	5f & 6f	19.0	35.0	7.20	5.50
SCMSX16-C	16 mm ²	5f & 6f	26.0	49.0	9.10	6.90
SCMSX25-L	25 mm ²	5f & 6f	19.5	36.0	10.40	8.20
SCMSX35-L	35 mm ²	5f & 6f	30.0	57.0	12.70	9.80
SCMSX50-L	50 mm ²	5f & 6f	27.5	52.0	14.20	11.50
SCMSX70-L	70 mm ²	5f & 6f	28.5	54.0	17.40	13.50
SCMSX95-Q	95 mm ²	5f & 6f	30.0	57.0	19.40	15.20
SCMSX120-Q	120 mm ²	5f & 6f	30.0	57.0	21.00	16.50
SCMSX150-X	150 mm ²	5f & 6f	32.0	61.0	23.00	18.60
SCMSX185-X	185 mm ²	5f & 6f	37.5	72.0	26.00	20.80
SCMSX240-X	240 mm ²	5f & 6f	39.0	75.0	29.00	23.50
SCMSX300-5	300 mm ²	5f	49.0	95.0	33.00	26.20

- NOTES:
1. Material: High conductivity seamless copper tube.
 2. Plating: Parts are annealed and tin plated.
 3. WireType: Class 5 and 6 Flexible Stranded Copper Conductor per DIN VDE 0295, IEC 60228, and HD 383.
 4. UL Listed & CSA Certified Wire Connectors for applications up to 35kv, when crimped per instruction sheet included with Panduit packaging. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 5. UL & CSA Temperature Rating: 90°C

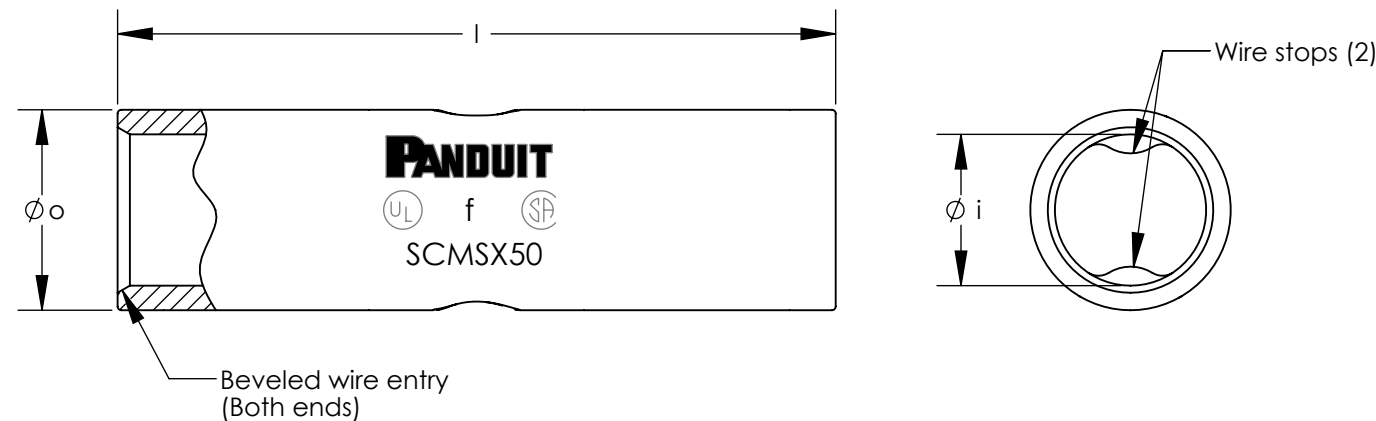

LISTED Wire Connector



CERTIFIED

										PANDUIT CORP. TINLEY PARK, ILLINOIS METRIC FLEX SPLICES - SCMSX SERIES 10-300mm ² CUSTOMER DRAWING					
														UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: (.X) ± (.XXX) ± (.XX) ± ANGLES ±	
										DRAWN BY TLCO DATE 5/11		MAT'L:		SCALE NONE	
00	11/12	TLCO	TLCO	DRAWING RELEASED			10N014BE-NC	RGB	RGB	CHK'D TLCO	DRAWING NO / CAD FILE 10N014BE-NC		DWG SIZE B		
REV	DATE	BY	CHK	DESCRIPTION			ECN	-R	SUP	CHK'D					