



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**MICRO SWITCH**  
a Honeywell Division


**SWITCH - BASIC**

**BZ-2RW8072224286-A2**

FED. MFG. CODE 91929

WHEN SEARCHING FOR THIS CATALOG LISTING WITHIN HONEYWELL'S INTERNAL SAP SYSTEM, THE LISTING MUST BE ENTERED WITHOUT DASHES (BZ2RW8072224286A2) DUE TO CHARACTER LIMITATIONS IMPOSED BY THE SYSTEM.

PRODUCT CODE: AQC8505

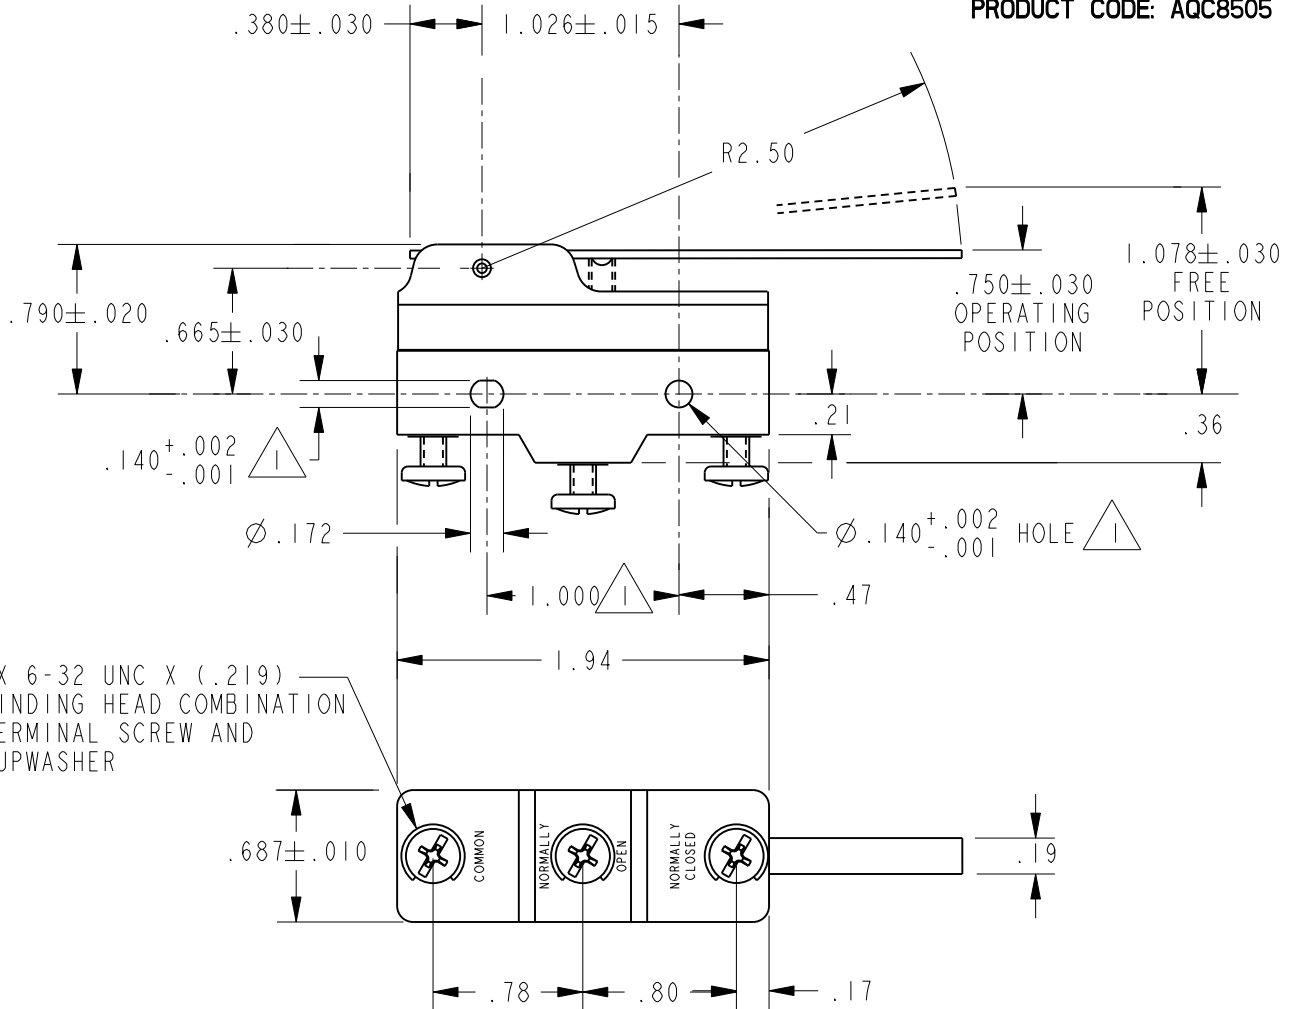


3X 6-32 UNC X (.219)  
BINDING HEAD COMBINATION  
TERMINAL SCREW AND  
CUPWASHER

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF  $\phi .139$  MAX ON  $1.000 \pm .002$  CENTERS
  - 2 - SWITCH WILL WITHSTAND TEMPERATURE OF  $250^{\circ}F$
  - 3 - CONTACT MATERIAL: GOLD ALLOY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.



CHARACTERISTICS	ELECTRICAL DATA	SCALE	NONE	DO NOT SCALE PRINT
OPERATING FORCE----- 2 1/2 OZ MAX	CONTACT ARRANGEMENT S P D T	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
RELEASE FORCE----- 1/2 OZ MIN	L22	ONE PLACE (.0)	±.030	
DIFFERENTIAL TRAVEL----- .007-.050	IA 125 VAC	TWO PLACE (.00)	±.015	
OVERTRAVEL----- .219 MIN	CE	THREE PLACE (.000)	±.005	
	L288 L307 L315	ANGLES	±	
	IA 250 V  T85 25E3	WEIGHT	.073 LB	

PTC / CAD 2D  
 DRAWN  
 C S L 3 SEP 03  
 CHECK  
 S A V  
 3 SEP 03  
 CHECK  
 R J  
 23NOV05  
 MBH 09DEC08  
 ISSUE C  
 M  
 09DEC08  
 RS  
 CHECK  
 09DEC08  
 RELEASE NO. 0001362  
 PAGE 1 OF 1  
 REPLACES X115057-BZ  
 CATALOG LISTING  
 BZ-2RW8072224286-A2