

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







SMD POWER INDUCTORS

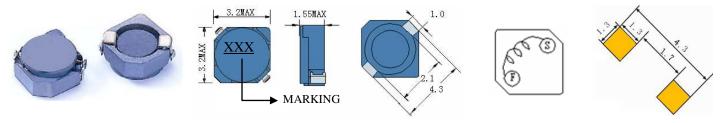



- Features
- 1. Magnetically shielded construction
- 2. Excellent Power Density
- 3. Engineered to Provide High Efficiency

CHARACTERISTICS



Part Number	Inductance (uH)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation (3) Current (A)	Temperature Current (A)
SCRH2D14-1R5	1.5	100KHZ	71m	1.80	1.60
SCRH2D14-1R8	1.8	100KHZ	85m	1.65	1.44
SCRH2D14-2R2	2.2	100KHZ	106m	1.50	1.29
SCRH2D14-2R7	2.7	100KHZ	114m	1.35	1.22
SCRH2D14-3R3	3.3	100KHZ	125m	1.20	1.15
SCRH2D14-3R9	3.9	100KHZ	178m	1.10	1.03
SCRH2D14-4R7	4.7	100KHZ	195m	1.00	930m
SCRH2D14-5R6	5.6	100KHZ	222m	950m	840m
SCRH2D14-6R8	6.8	100KHZ	253m	850m	790m
SCRH2D14-8R2	8.2	100KHZ	294m	800m	750m
SCRH2D14-100	10	100KHZ	396m	700m	710m
SCRH2D14-120	12	100KHZ	515m	620m	680m

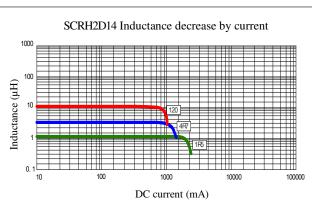

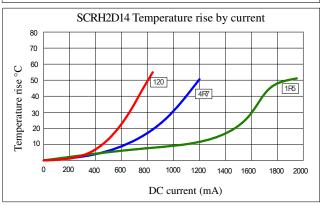

- (1). Inductance tolerance $\,\pm30\%$ tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 35% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

Click here for QUANTITY PER REEL & PACKING INFORMATION



