



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SCRH6D38

SMD POWER INDUCTORS

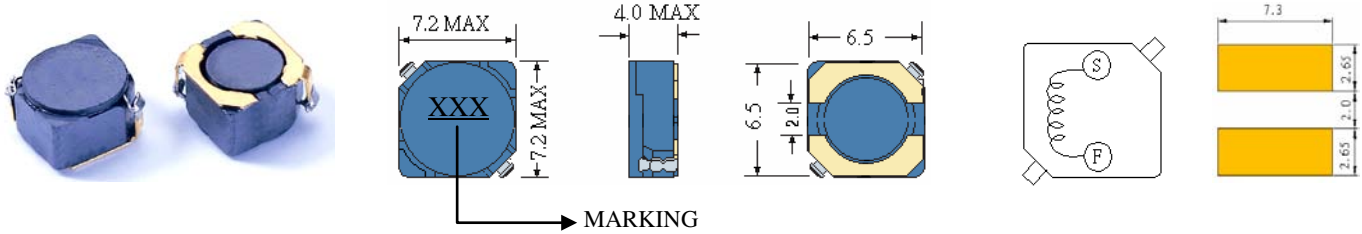



• Features

1. Magnetically shielded construction
2. Excellent Power Density
3. Engineered to Provide High Efficiency



ELECTRICAL CHARACTERISTICS

Part Number	Inductance (uH) (1)	Test Frequency	DC Resistance (Ω MAX) (2)	Saturation Current (3) (A)	Temperature Current (4) (A)
SCRH6D38-3R3	3.3	10KHZ	23m	3.50	4.00
SCRH6D38-5R0	5.0	10KHZ	26m	2.90	3.80
SCRH6D38-6R2	6.2	10KHZ	27m	2.50	3.60
SCRH6D38-7R4	7.4	10KHZ	31m	2.30	3.50
SCRH6D38-8R7	8.7	10KHZ	34m	2.20	3.33
SCRH6D38-100	10	10KHZ	38m	2.00	3.20
SCRH6D38-120	12	10KHZ	53m	1.70	2.88
SCRH6D38-150	15	10KHZ	57m	1.60	2.59
SCRH6D38-180	18	10KHZ	92m	1.50	2.43
SCRH6D38-220	22	10KHZ	96m	1.30	2.18
SCRH6D38-270	27	10KHZ	109m	1.20	1.96
SCRH6D38-330	33	10KHZ	124m	1.10	1.76
SCRH6D38-390	39	10KHZ	138m	1.00	1.67
SCRH6D38-470	47	10KHZ	155m	0.95	1.50
SCRH6D38-560	56	10KHZ	202m	0.85	1.35
SCRH6D38-680	68	10KHZ	234m	0.75	1.21
SCRH6D38-820	82	10KHZ	324m	0.70	1.08
SCRH6D38-101	100	10KHZ	358m	0.65	0.97

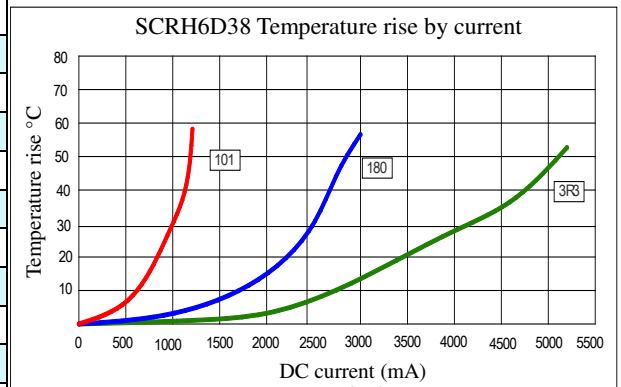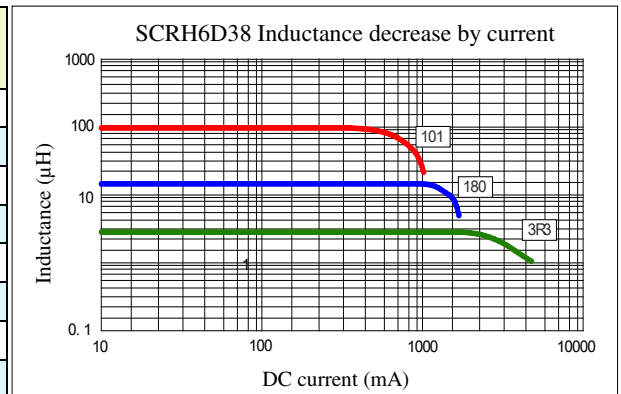

- (1). Inductance tolerance $\pm 30\%$ tested at 0.25V, 0ADC and 25°C
- (2). DCR measured at 25°C.
- (3). The DC current at which the inductance decreases by 35% from its initial value.
- (4). The DC current that results in a 40°C temperature rise from 25°C ambient.

[Click here for QUANTITY PER REEL & PACKING INFORMATION](#)

Custom versions available upon request.