



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



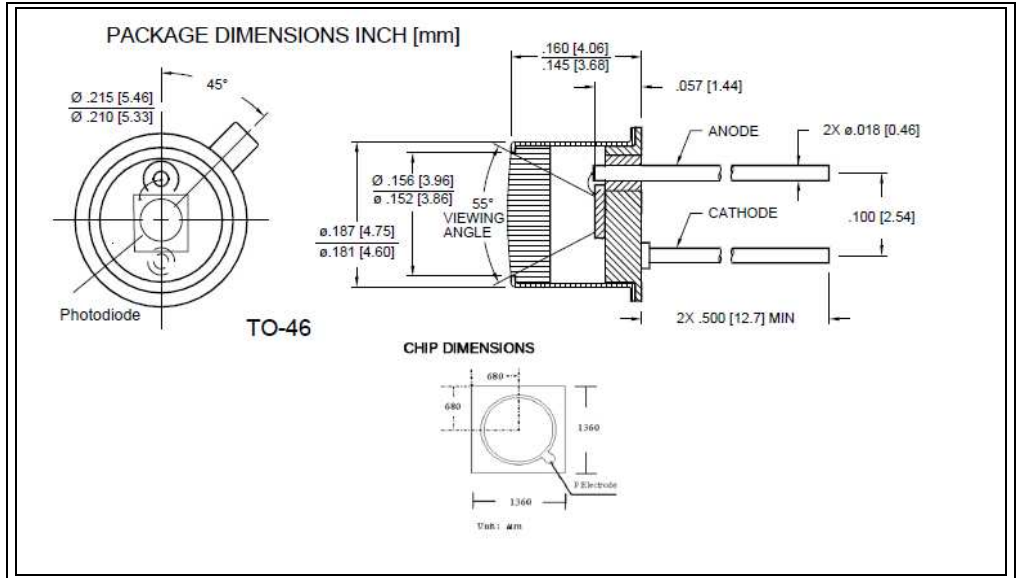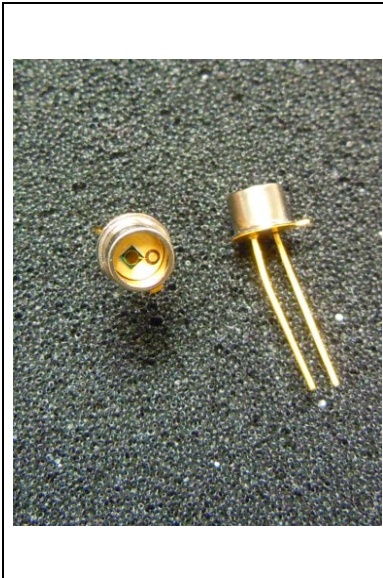

**DESCRIPTION**

The **SD039-151-011** is a high sensitivity, low noise, 1 mm diameter active area InGaAs photodiode (chip dimensions 1.36mmx1.36mm) for detection at SWIR, NIR wavelengths for imaging and sensing applications. Photodiode assembled in a TO-46 package.

**FEATURES**

- Low Noise
- High Sensitivity
- Detector at AWIR and NIR

**RELIABILITY**

This Luna high-reliability device is in principle able to meet military test requirements (Mil-STD-750, Mil-STD-883) after proper screening and group test. Contact Luna for recommendations on specific test conditions and procedures.

**APPLICATIONS**

- Industrial Sensing
- Security and Defense
- Communication
- Medical

**ABSOLUTE MAXIMUM RATINGS**

SYMBOL	MIN		MAX	UNITS	$T_a = 23^\circ\text{C}$ non condensing 1/16 inch from case for 3 seconds max
Reverse Voltage	-	-	40	V	-
Operating Temperature	40	to	+100	$^\circ\text{C}$	-
Storage Temperature	-55	to	+125	$^\circ\text{C}$	-
Soldering Temperature	-	-	+260	$^\circ\text{C}$	-
Wavelength Range	400	to	100	nm	-

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.


**OPTO-ELECTRICAL PARAMETERS**

T<sub>a</sub> = 23°C UNLESS NOTED OTHERWISE


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNITS
Breakdown Voltage	I <sub>bias</sub> = 1 μA	20	-	40	V
Spectral Range	–	800	-	1700	nm
Responsivity	λ = 1310 nm, V <sub>r</sub> = 5V	0.8	0.9	-	A/W
Shunt Resistance	V <sub>bias</sub> = 10 mV	40	200	-	MΩ
Dark Current	V <sub>bias</sub> = 5V	-	0.2	10	nA
Capacitance	V <sub>bias</sub> = 5V; f = 1 MHz	-	70	150	pF
Rise Time (50Ω load)	V <sub>bias</sub> = 5V; λ = 1310 nm	-	2.0	-	ns
Noise Equivalent Power	V <sub>R</sub> = 5V @ λ = 1310	-	1.0x10 <sup>-14</sup>	-	fW/√Hz

**TYPICAL PERFORMANCE**


**NOISE CURRENT vs. REVERSE BIAS**

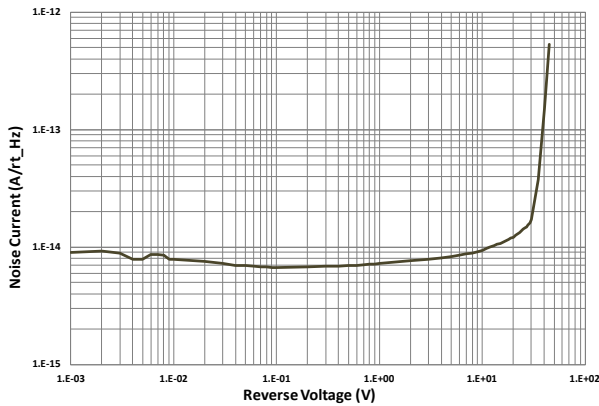

**DARK CURRENT vs REVERSE BIAS**

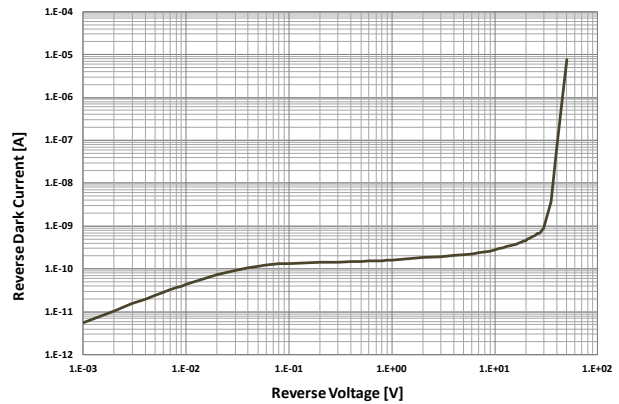

**SPECTRAL RESPONSE**

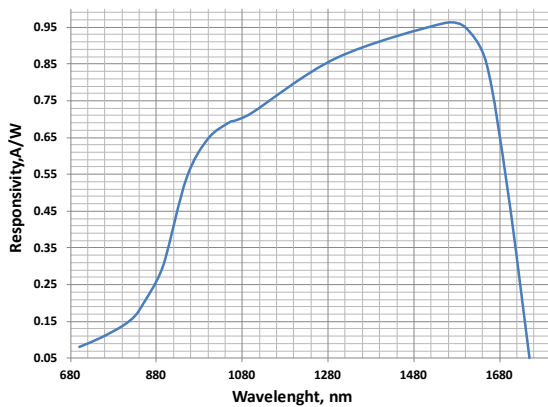

**CAPACITANCE vs. REVERSE BIAS**

