



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Gear Tooth Speed and Direction Sensor



## SD101201 Sensors

Circuit protected, flange mount Hall Effect gear tooth speed and direction sensor

### Description

The SD101201 has two Hall Effect sensors; one detects speed and the other detects direction of movement of gear teeth. The outputs are open collector transistors. The Speed output goes low (ON) when sensing the leading edge of a tooth and high (OFF) at the trailing edge of the tooth when run against a standard target (see diagram). The Direction output goes low (ON) for clockwise rotation and high (OFF) for counterclockwise rotation (as seen in the diagram); it is latched in that state as long as there is movement detected. The state of the Direction output always leads the rising edge of the Speed output – correct Direction sensing will occur faster after start-up than correct Speed sensing. An external pull-up resistor is required.

### Features

- Separate digital outputs for speed and direction
- From near zero speed up to 15 kHz sensing capability
- Plastic flange-mount sensor rated to 125 °C
- RoHS compliant
- IP67
- Typical air gap of 1.5 mm (0.06")\*

### Typical Applications

- Wheel speed and direction
- Hoist speed and direction
- Transmission speed and direction
- Industrial feedback and control

### Environmental Specifications

Vibration	Sinusoidal, 3.3 g max from 20 Hz to 1 kHz
Maximum Speed Detection	15 kHz
Operating Temperature	-40 °C to 125 °C (-40 °F to 257 °F)
Storage Temperature	-40 °C to 125 °C (-40 °F to 257 °F)
Ingress Protection	IP67

### Electrical Specifications

Operating Supply Voltage	4.75 to 24 VDC
Maximum Input Voltage	30 VDC
Maximum Reverse Voltage	30 VDC
Supply Current	20 mA max
Output Sink Current	20 mA max
Typical Operating Time	5 µs
Recommended Pull-Up Resistor	See chart

### Mechanical Specifications

Housing Material	Glass Reinforced Thermoplastic
Maximum Installation Torque Limit	5.65 Nm (50 in lb) on threads
Operating Air Gap / Sensing Distance*	1.5 mm (0.06")
* With recommended target type; see drawing	
Sensor Orientation	Sensitive; see drawing


### Products

<b>Part Number</b>	<b>Connector**</b>
SD101201	Delphi Metri-Pak 150

\*\* Mates to Delphi 12162833 connector, 12124075 terminal

Note: An external pull-up resistor is required, the value of which is dependent on the supply voltage. The resistor should be connected between the output and Vcc. Refer to the wiring diagram for lead colors or pin numbering as applicable.


www.cherryswitches.com

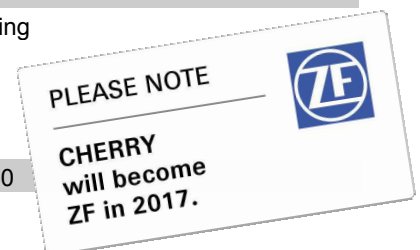

## Recommended External Pull-Up Resistor


Volts DC	5	9	12	15	24
Ohms	1k	1.8k	2.4k	3k	4.8k

## Open Collector Sinking Block Diagram

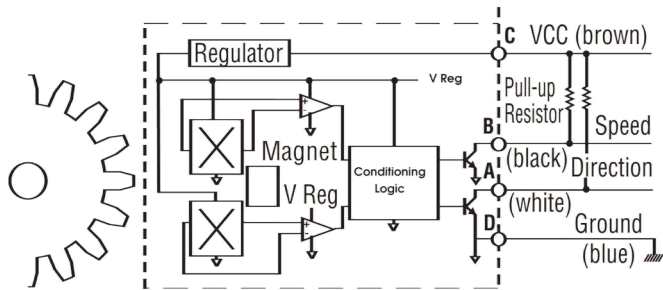


PIN A	PIN B	PIN C	PIN D
Direction Output	Speed Output	Power	Ground

## Dimensions mm (inches)

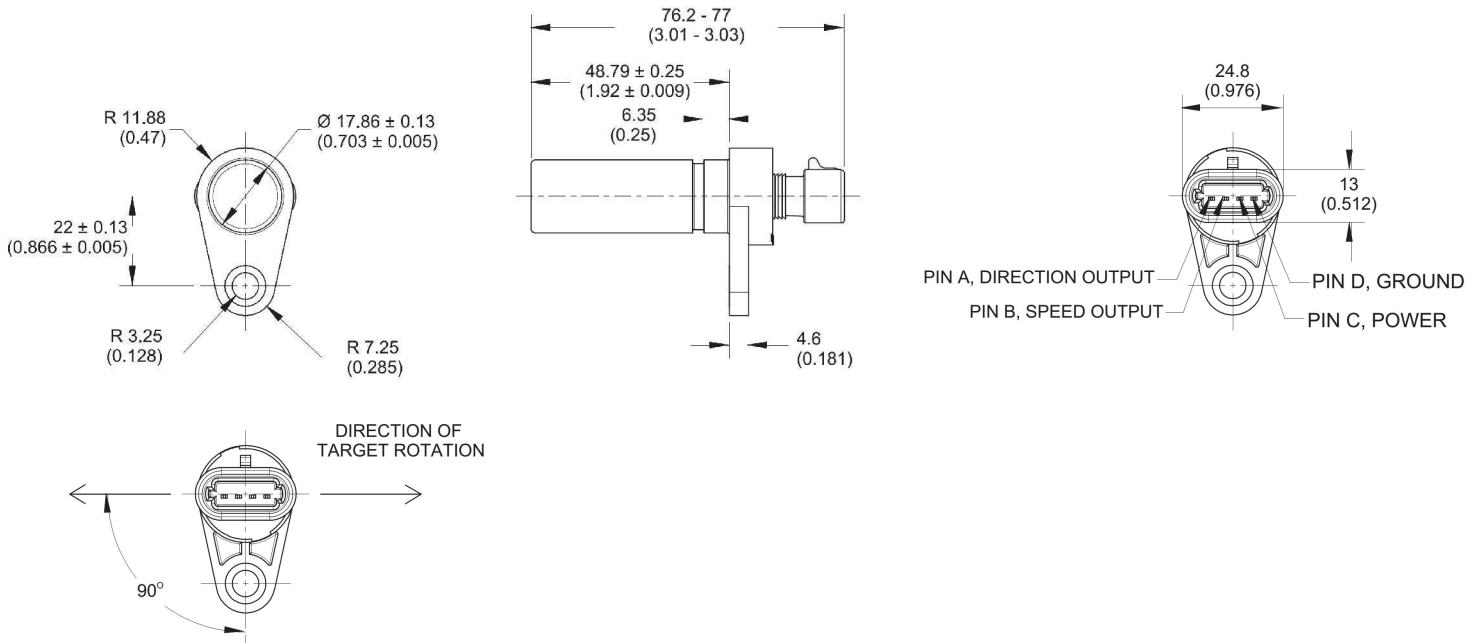

## Installation

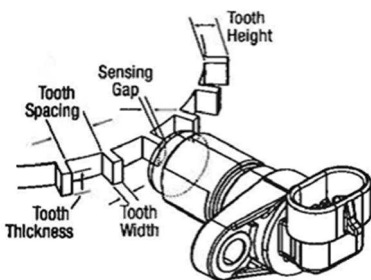

For best results, we recommend targets made from low carbon cold rolled steel. Other factors that influence sensor performance include gear tooth height and width, space between the teeth, shape of the teeth and thickness of the target. As a general guideline, consider a target with minimum parameters as shown below. Note that smaller dimensions may work, but testing for the application is required.

Tooth Height	Tooth Width	Distance between Teeth	Target Thickness
5.0 mm (.200")	2.5 mm (.100")	10 mm (.400")	6.35 mm (.250")