



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!





## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



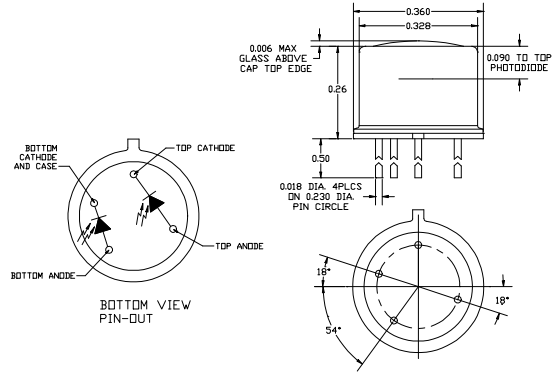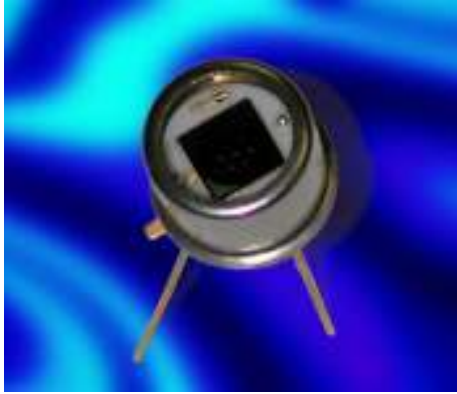

**CHIP DIMENSIONS INCH [mm]**

**TO-5 PACKAGE**

## FEATURES

- Large Active Area
- Low Noise
- High Shunt Resistance
- Hermetically Sealed
- High Saturation

## DESCRIPTION

The **SD138-11-31-211** device features two silicon PIN photodiodes vertically integrated a hermetic TO-5 package. The top photodiode absorbs a portion of the light and the remaining light is transmitted to the bottom photodiode. The current ratio of the two photodiodes is used to remotely determine and monitor the color temperature of an object.


The **SD138-11-31-211** can find application in dual wavelength power meters and remote color temperature sensing.

## APPLICATIONS

- Dual Wavelength Power Meters
- Remote Color Temperature Sensing

SYMBOL	PARAMETER	MIN	MAX	UNITS
$V_{BR}$	Reverse Voltage		25	V
$T_{STG}$	Storage Temperature	-55	+150	°C
$T_O$	Operating Temperature	-40	+125	°C
$T_S$	Soldering Temperature*		+240	°C

\* 1/16 inch from case for 3 seconds max.

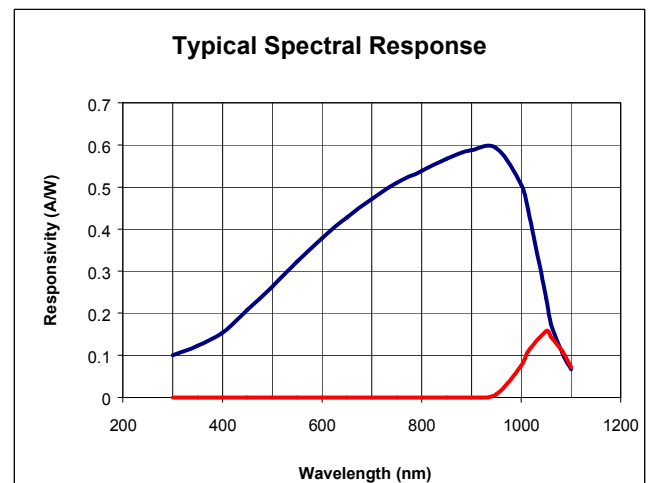

## ELECTRO-OPTICAL CHARACTERISTICS OF TOP AND BOTTOM PHOTODIODES

@ + 23°C AND VOLTS BIAS UNLESS OTHERWISE SPECIFIED

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Active Area Diameter (Top)			3.5		mm
Active Area Diameter (Bottom)			3.1		mm
Spectral Range of (Top)			300 to 1100		nm
Spectral Range of (Bottom)			950 to 1100		nm
Shunt Resistance	Bias: 10mV	50	200		MΩ
Responsivity	Wavelength = 950 nm	0.50	0.60		A/W
Reak NEP (Bottom)	Wavelength = 1050	0.135	0.155		A/W
Peak NEP (Top)	Wavelength = 950		12	25	fw/√Hz
Peak NEP (Bottom)	Wavelength = 1050		45	100	fw/√Hz
Capacitance			290	305	pF
Operating Temperature		-55		+100	°C
Storage Temperature		-55		+100	°C

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice.

Advanced Photonix Inc. 1240 Avenida Acaso, Camarillo CA 93012 • Phone (805) 987-0146 • Fax (805) 484-9935 • [www.advancedphotonix.com](http://www.advancedphotonix.com)

REV 6/11/09