



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Humidity/Temperature Datalogger

Records data on an SD card in Excel[®] format


For easy transfer to a PC for analysis

Features:

- Dual LCD simultaneously displays Relative Humidity and Temperature readings
- Datalogger date/time stamps and stores readings on an SD card in Excel[®] format for easy transfer to a PC
- Selectable data sampling rate: 5, 10, 30, 60, 120, 300, 600 seconds or Auto
- Complete with 6 AAA batteries, 2G SD card, Universal AC Adaptor, and mounting bracket



Monitor and record temperature and humidity values in the calibration rooms, office, clean rooms, and storage facilities

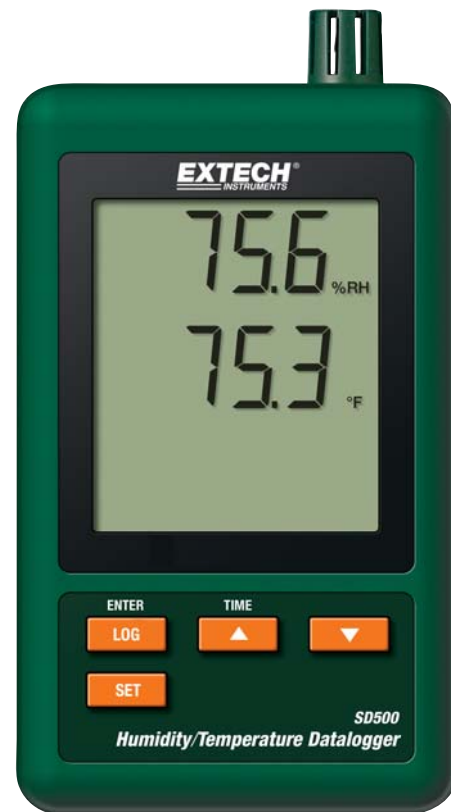

Patent Pending

Specifications	Range	Resolution	Accuracy (%rdg+digits)
Temperature	32 to 122°F 0 to 50°C	0.1°F/°C	±1.5°F ±0.8°C
Humidity	10 to 90%RH	0.1%RH	±4%RH
Datalogging interval	5, 10, 30, 60, 120, 300, 600 seconds or Auto		
Memory	20M data using a 2G SD card		
Dimensions	5.2 x 3.1 x 1.3" (132 x 80 x 32mm)		
Weight	9.9oz (282g)		

Ordering Information:

SD500Humidity/Temperature Datalogger

