



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




pH/ORP/Temperature Datalogger

Records data on an SD card in Excel[®] format
 For easy transfer to a PC for analysis

Features:

- Dual display of pH or mV and Temperature
- ATC or manual Temperature compensation
- 3 point calibration ensures the best linearity and accuracy
- Large backlit dual LCD
- Stores 99 readings manually and 20M readings via 2G SD card
- Records readings with real date and time stamp
- User programmable sampling rate: 1 second to 8hrs:59min:59sec
- Min/Max and Data Hold functions
- Auto power off with disable function
- Built-in PC interface
- Complete with 6 x AA batteries, SD card, hard carrying case, sample buffers, mini pH electrode (60120B), and Thermistor temperature probe (850188)

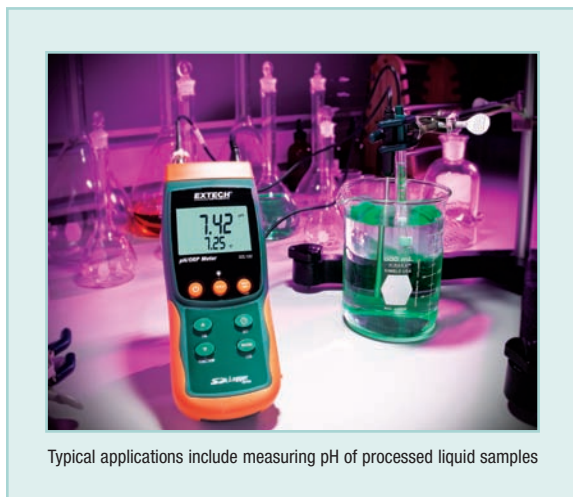

Typical applications include measuring pH of processed liquid samples

Specifications	Range	Resolution	Basic Accuracy
pH Range	0 to 14pH	0.01pH	±(0.02pH + 2 digits)
ORP Range	-1999mV to 1999mV	1mV	±(0.5% + 2 digits)
Temperature	32 to 149°F (0 to 65°C)	0.1°	±1.8°F/1°C
Memory	20M data records using 2G SD card		
Dimensions	7.2 x 2.9 x 1.9" (182 x 73 x 47.5mm)		
Weight	16oz (455g)		

Ordering Information:

- SDL100**pH/ORP/Temperature Datalogger
SDL100-NISTSDL100 w/Certificate of Calibration Traceable to NIST standards
60120BMini pH Electrode (10x120mm)
601500Standard pH Electrode (12x160mm)
601100Flat Surface pH Electrode (15x106mm)
67500BStandard ORP Electrode (12x160mm)
850188Thermistor Temperature Probe (32 to 149°F/0 to 65°C)
153117117V AC Adaptor
UA100-240100-240V AC Adaptor w/4 plugs (US, EU, UK, AU)

