



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





FEATURE HIGHLIGHTS

- Industrial EMC protection, wide temperature operation, -40°C~85°C
- 2-port 10/100Mbps Fast Ethernet, 1-port USB 2.0 high speed OTG
- TCP Server/Client, UDP, Virtual COM and Tunneling modes supported
- Embedded security with IPsec VPN support
- Remotely monitor, manage, and control industrial field devices
- Optional 802.3af PoE models can be powered through the Ethernet cable
- Configuration via Web Browser/ Serial Console/ Telnet/ Windows Utility
- Remote firmware upgrade
- Rugged metal case with wall or DIN-Rail mount

PRODUCT DESCRIPTION

Make Serial Devices Ready to the Network

The Industrial Serial Device Server SE5901 is a cost effective gateway for Ethernet (TCP/IP) and serial signal communications; allowing almost any serial device to be connected to a new or existing Ethernet network. By encapsulating serial data and transporting it over Ethernet, SE5901 offers full-duplex and bi-directional data seamlessly between the serial port and the Ethernet network.

Advanced embedded security

SE5901 embeds IPsec VPN Encryption, that allows you to tunnel your data securely through the internet and prevent unauthorized control of your Serial Devices by malicious people.

Easy to Use

Flexible configuration options enable this unit to be setup over Ethernet by Telnet, Web Browser, Serial Console, or our Windows Utility. Packed in a rugged metal housing for wall or DIN-Rail mount with 9-48 VDC wide range power input, SE5901 is ideal for almost any industrial and manufacturing automation process. Atop Virtual COM software provides a virtual environment for applications when accessing SE5901 through TCP.

Specially Designed for Automation Fields and Harsh Environments

In industrial and manufacturing automation fields, SE5901 is used as a field device to connect the Ethernet through TCP/IP protocol directly. It is also specially designed for conjunction with PLCs, HMIs, Barcode Scanners, Data Terminals, and much more..Its design protects it from very harsh EMC and environmental conditions, making it a cost-effective choice for advanced applications

Rugged and flexible for advanced developments


SE5901 embeds high EMC protection, wide temperature operation, programming and installation flexibility in one device. PoE versions can be powered through Power-over-Ethernet (PoE 802.3af), without additional cabling and power supply. SDK versions allow you to make use of the powerful hardware and develop your own applications on top of Atop's reliable SDK.

SPECIFICATIONS

Technical Specifications	
Model Name	SE5901
Network interface	
Speed	IEEE 802.3 10BaseT IEEE 802.3u 100BaseT(X)
PoE standard supported	IEEE 802.3 af (PoE)
Connector ports	RJ45 x 2
Serial Interface	
Connector	D-Sub9 RS-232/422/485 software selectable (DB models) 5.08mm 5-Pin Terminal block RS-232/422/485 sw selectable (TB models)
Ports	1
Baud Rate	1,200 ~ 921,600 bps software selectable
Data Bits	5, 6, 7, 8 software selectable
Stop Bits	1, 2 software selectable
Flow Control	None, Xon/Xoff, RTS/CTS
USB interface	
Speed	USB 2.0
Connector	USB A Type
Power	
Input Voltage	9 - 48VDC (non-PoE Models); or through Ethernet Cable (PoE versions)
Input Current (@ 9VDC)	0.65 A
Power Consumption	Approximately 6 W (Max)
Connector	3-Pin 5.08mm Lockable Terminal Block
Reverse Polarity Protection	Yes
Physical Characteristics	
Housing	IP30 SPCC housing
Dimension (W x H x D)	32 x 110 x 90 mm (1.26 x 4.33 x 3.54 in)
Weight	400 g
Installation	DIN-Rail, Wall mount (optional kit)
Reset Button	Yes
Environmental Limits	
Operating Temperature	-40°C~85°C (-40°F~185°F)
Storage Temperature	-40°C~85°C (-40°F~185°F)
Ambient Relative Humidity	5%~95%, 55°C (Non-condensing)
Software	
Protocols	IPv4, ICMP, TCP, UDP, DHCP Client, SNMPv1,v2c,v3, HTTP, HTTPS, Telnet, RFC2217, Security through IPsec host-to-host or host-to-side VPN with up to 37.9Mbps VPN throughput
Configuration	Atop Management Utility, Web UI, Telnet, Serial Console

VirtualCOM	Windows/Linux redirection software
Link Modes	
TCP Client	Single destination or VirtualCOM
TCP Server	4 Connections; VirtualCOM or reverse Telnet
UDP	Up to 4 Ranges IP

DIMENSIONS & LAYOUT

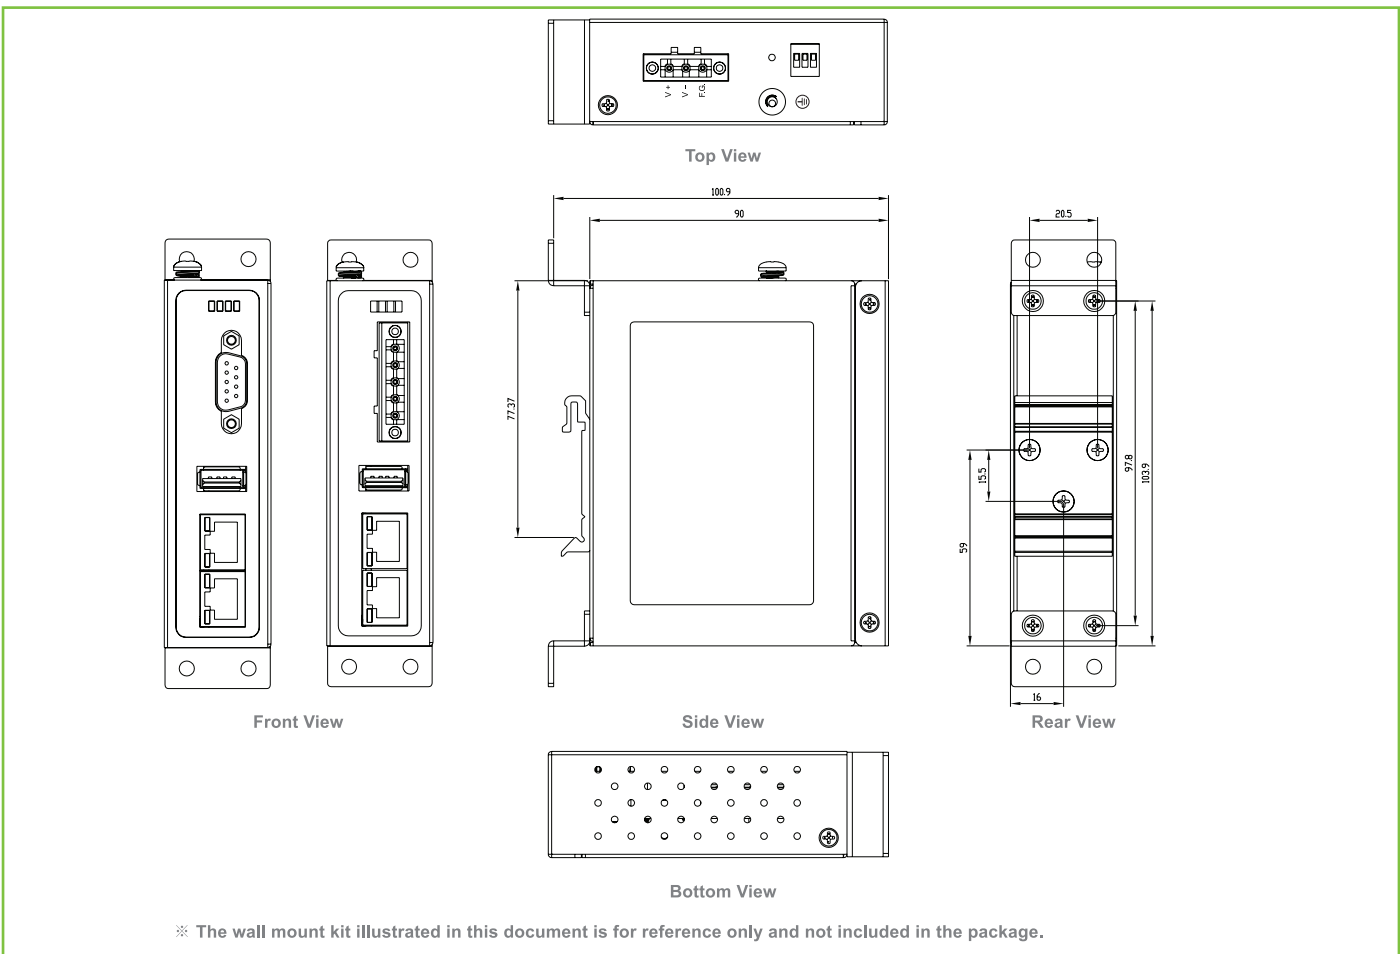

REGULATORY APPROVALS

Regulatory Approvals	
Safety	EN60950-1:2006
EMC	FCC Part 15, Subpart B, Class A EN 55032, EN 55024, EN 61000-3-2, EN 61000-3-3, EN 61000-6-2, EN 61000-6-4,

Test	Item		Value	Level
IEC 61000-4-2	ESD	Contact Discharge	±8kV	4
		Air Discharge	±15kV	4
IEC 61000-4-3	RS	Radiated (enclosure)	10 V/m	3
IEC 61000-4-4	EFT	DC Power Port	±2.0KV	3
		Signal Port	±2.0KV	3
IEC 61000-4-5	Surge	DC Power Port	Line-to Line±1.0KV	3
		DC Power Port	Line-to Earth±2.0KV	3
		Signal Port	Line-to Earth±2.0KV	3
IEC 61000-4-6	CS	Conducted (enclosure)	10 V rms	3
IEC 61000-4-8	PFMF	Enclosure	10 A/m	3
IEC 61000-4-11	DIP	Power Port	-	A
Shock Drop (Freefall) Vibration	IEC 60068-2-27 IEC 60068-2-32 IEC 60068-2-6			
RoHS II	Yes			
MTBF	TBD			
Warranty	5 years			

ORDERING INFORMATION

Ordering information

Model name	Part Number	Description	Ethernet	Serial
SE5901-DB	1P1SE5901DB001G	1-port RS-232/422/485 Ind. Serial Device Server, DB9	2	1 (DB9)
SE5901-TB	1P1SE5901TB001G	1-port RS-232/422/485 Ind. Serial Device Server, TB5	2	1 (TB)
SE5901-PoE-DB	1P1SE5901POE01G	1-port RS-232/422/485 Ind. Serial Server, DB9,PoE Pwr	2	1 (DB9)
SE5901-PoE-TB	1P1SE5901POE02G	1-port RS-232/422/485 Ind. Serial Server, TB,PoE Pwr	2	1 (TB)
SDK version	Contact Headquarter	SDK programmable version available upon request	2	1

Optional Accessories

Model name	Part Number	Description
UN315-1212 (US-Y)	50500151120003G	Y-Type power adaptor, 100~240VAC input, 1.25A @ 12VDC output, US plug, LV6
UNE315-1212 (EU-Y)	50500151120013G	Y-Type power adaptor, 100~240VAC input, 1.25A @ 12VDC output, EU plug, LV6
ADP-DB9(F)-TB5	59906231G	Female DB9 to Female 3.81 TB5 Converter
WMK-315-Black	70100000000050G	Black Aluminum Wall Mount Kit