

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



### Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









#### SPECIFICATION FOR APPROVAL

CUSTOMER

DESCRIPTION

AXIAL AC FAN

DIMENSIONS

92X92X25 mm

MODEL

SF11592A

P/N

1092HBT

APPROVED NO

APPROVED BY

(AUTHORZIED)



DAWN.	號育風 7/6	CHKD. <b>2007</b>			12	SPEC. NO.	292212300
						ISSUE DATE	07.12.1996
			APPD.	A4-	<b>EDITION</b>	0	
			,			REVISE DATE	

建準電機工業股份有限公司

SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.

12FL., 120 CHUNG CHENG 1ST RD., TEL:886-7-7163069(41 LINES)

KAOHSIUNG, TAIWAN, R. O. C.

FAX:886-7-7163086~89

#### AXIAL AC FAN

MODEL: SF11592A

P/N

: 1092HBT



#### CHARACTERISTICS

1. Motor Design : Reliable Shaded-Pole Motor Construction.

2. Insulation Resistance : 500 Megohms minimum at 500 VDC.

3. Dielectric Strength : 1500 VAC for one minute.

4. Motor Protection : Impedence protected.

5. Noise Level : Measured in an semi-anechoic chamber

with background noise level below 15

dBA. The fan is running in free air with

microphone at a distance of one meter

from the fan intake.

6. Air Performance : Measured by a double chamber. The value are

recorded when the fan speed is stabilized at

rated voltage.

7. Tolerances  $\pm 15\%$  on rated power and current.

建準電機工業股份有限公司	SPEC. NO.	292212300	REVISE DATE	
SUNONWEALTH ELECTRIC	issue date	07. 12. 1996	EDITION	0
MACHINE INDUSTRY CO., LTD.	PAGE	2 OF 6		

### **SPECIFICATIONS**

MODEL: SF11592A

P/N : 1092HBT

1-1. Rated Voltage : 115/115 VAC 50/60 HZ

1-2. Operating Voltage Range : 85-125 VAC

1-3. Starting Voltage : 85 VAC

1-4. Rated Speed : 2350/2850 RPM±5%

1-5. Air Delivery : 30/37 CFM

1-6. Static Pressure : 0.13/0.19 Inch-H<sub>2</sub>O

1-7. Rated Current : 0.12/0.11 AMP

1-8. Input Power : 13/12 WATTS

1-9. Noise Level : 37/40 dB(A)

1-10. Direction of Rotation : Clockwies viewed from front face

1-11. Motor Protection : Impredance Protected

1-12. Operating Temperature : -10 to +70 Deg.C

1-13. Storage Temperature : -40 to +70 Deg.C

1-14. Bearing System : Precise ball bearing system

1-15. Weight : 280 g

1-16. Safety : UL/CSA Approvals

	1	工業	(R)	<b>X</b>
÷	<b>S</b> #	發	部	End
	85	9.	<b>-</b> y	
	發	行	章	
	\			


建準電機工業股份有限公司	SPEC. NO.	292212300	REVISE DATE	
SUNONWEALTH ELECTRIC	ISSUE DATE	07. 12. 1996	EDITION	0
MACHINE INDUSTRY CO., LTD.	PAGE	3 OF 6		

MODEL: SF11592A

P/N : 1092HBT

### PERFORMANCE CURVES

#### STATIC PRESSURE

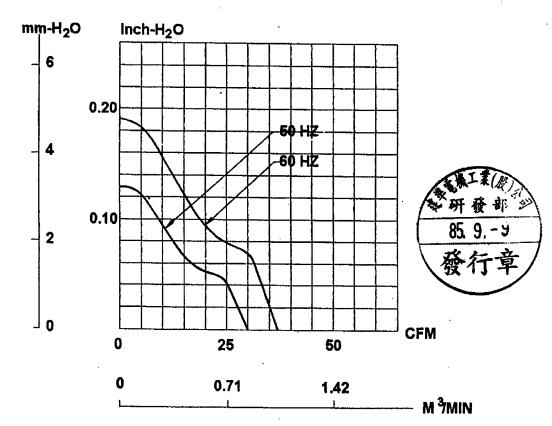

建準電機工業股份有限公司	SPEC. NO.	292212300	REVISE DATE	
SUNONWEALTH ELECTRIC	ISSUE DATE	07. 12. 1996	EDITION	0
MACHINE INDUSTRY CO., LTD.	PAGE	4 OF 6		

## **MATERIAL**

2. Material


2-1 Frame : Thermoplastic PBT of UL 94V-0

2-2. Impeller : Thermoplastic PBT of UL 94V-0

2-3. Lead Wire : UL1007,24AWG

# **DIMENSIONS**



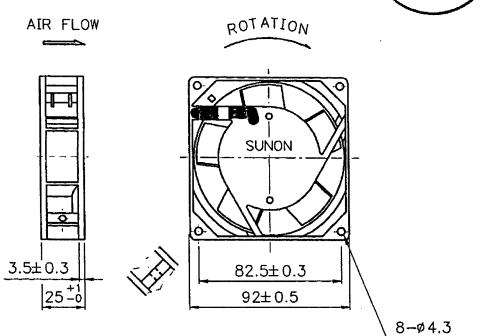

ł	H	N	IT	٠	mm
L				•	

建準電機工業股份有限公司	SPEC. NO.	292212300	revise date	
SUNONWEALTH ELECTRIC	ISSUE DATE	07. 12. 1996	EDITION	0
MACHINE INDUSTRY CO., LTD.	PAGE	5 OF 6		



# Notes

- 1. SUNON will not guarantee the products if the application of our products is exceeded the limitation which is specified on this specification.
- 2. In case of change of the specification specified on this document, a written notice is requested in advance.
- 3. Please do not touch the impeller with pressure and never bring the fan with lead wire. The bearings and lead wire may be damaged.
- 4. No guarantee on the products against the safety problem or failure caused by powder dust, drop of water or insect.
- 5. If there is any data or related documentation different from this data sheet, this data sheet is the principal reference.
- 6. For the purpose of MIS, please indicate SPEC No. on every order.
- 7. In case of the fan has no polarity protection function, wires with same color (electrode) must be connected together during the assembly. (i.e.red+red,black+black)

建準電機工業股份有限公司 SLINONWEALTH FLEGTRIA	SPEC. NO.	292212300	REVISE DATE	
SUNONWEALTH ELECTRIC MACHINE INDUSTRY CO., LTD.	ISSUE DATE	07. 12. 1996	EDITION	0
THE THEOSIKI CO., LID.	PAGE	6 OF 6		