

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








ROHS COMPLIANT

PRODUCT DATA DRAWING

REVISION HISTORY					
REV	DESCRIPTION	DATE	APPROVED		
Α	DCN 41727	10/15	DAL		



MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1 **BODY & INSERT:**

BERYLLIUM COPPER PER ASTM B196, CONTACT:

ALLOY No. UNS C17300, TD04

BEAD: ULTEM 1000 PER ASTM D5205

FINISH:

BODY: PASSIVATED PER AMS-2700

INSERT: GOLD PER ASTM B 488, TYPE I,

CODE C, CLASS 1.52, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.


GOLD PER ASTM B488, TYPE I CONTACT:


CODE C, CLASS .50, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 50.0 GHz

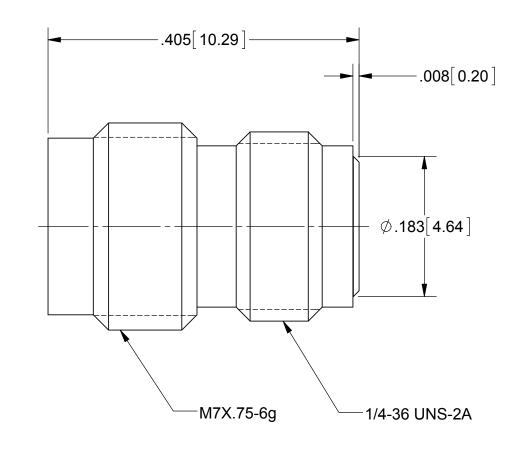

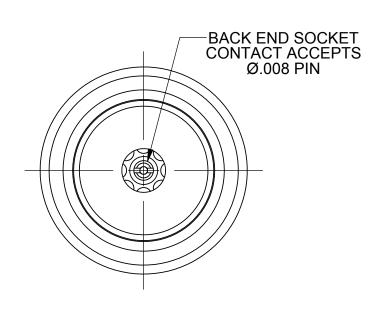

MATERIAL:	SEE NOTES					
FINISH:	SEE NOTES					
SURFACE AREA: N/A						
	PROPRIETARY					
IS THE SOLE P ANY REPRODU WITHOUT THE	TION CONTAINED IN THIS DRAWIN PROPERTY OF SV MICROWAVE, IN JCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF /E, INC IS PROHIBITED.					

DIMENSIONS ARE IN INCHES TOLERANCES				
FRACTIONAL: ±1/64 ANGULAR: X° ±1 X°X' +2				
DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005				
INTERPRET DIMENSIONS AND TOLERANCE PER ASME Y14.5M - 1994				

UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS]
2) ALL DIMENSIONS ARE AFTER PLATING.
3) BREAK CORNERS & EDGES 005 R. MAX.
4) CHAM. 1ST & LAST THREADS.
5) SURFACE ROUGHNESS 63.4ML-STD-10.
6) DIA'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R.
7) REMOVE ALL BURRS

STW 06/14/01 DRAWN: THIRD ANGLE PROJECTION CHECKED: STW 06/14/01 APPROVED: STW 06/14/01



TITLE: 2.4MM JACK SPARKPLUG LAUNCHER

	CAGE CODE 95077	DWG. NO.	SF1675	5-6004
SCALE: 8:1				SHEET 1 OF 1