

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China










ROHS COMPLIANT

PRODUCT DATA DRAWING



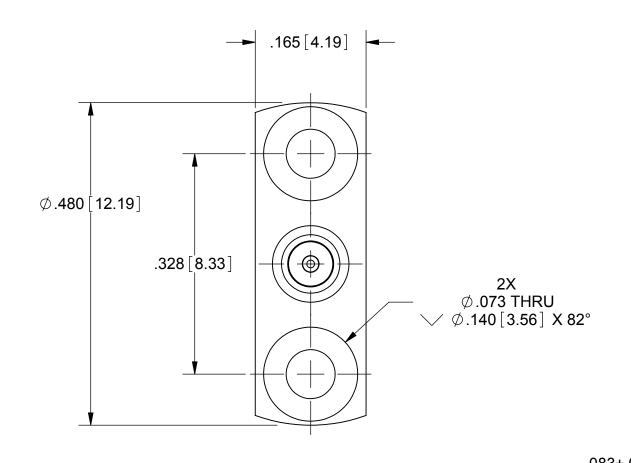

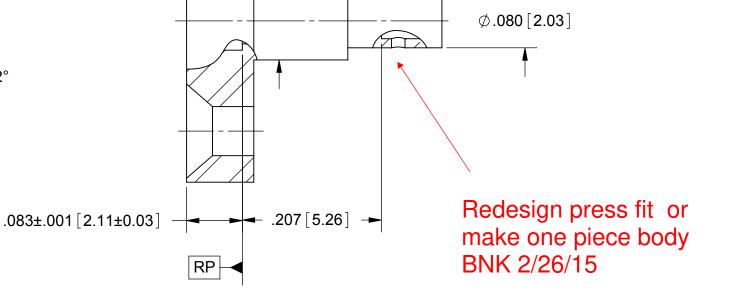

.380 [9.65]

.100 [2.54]

- Ø.112[2.84]

MATERIAL:

STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1

FERRULE &

BODY:

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300. TD04

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

FINISH:

BODY: PASSIVATED PER AMS-2700, TYPE 2

FERRULE &

CONTACT: GOLD PER ASTM B488, TYPE II,

CODE C, CLASS 1.27; ÓVER NIĆKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

PERFORMANCE:

50 OHMS IMPEDANCE:

FREQ. RANGE: DC TO 40.0 GHz VSWR: 1.30:1 DC TO 40.0 GHz

DWV: **325 VRMS**

OPERATING TEMP.: -55°C TO +125°C

MATERIAL:	SEE NOTES	
FINISH: SEE NOTES		
SURFACE AREA: N/A		
PROPRIETARY		
IS THE SOLE P ANY REPRODU WITHOUT THE	TION CONTAINED IN THIS DRAWIN PROPERTY OF SV MICROWAVE, IN JCTION IN PART OR AS A WHOLE WRITTEN PERMISSION OF /E, INC IS PROHIBITED.	

DIMENSIONS ARE IN INCHES TOLERANCES:		
FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'		
DECIMAL: .X ±.030 .XX +.010		
.XXX ±.005		
INTERPRET DIMENSIONS AND TOLERANCES		
PER ASME Y14.5M - 1994		

FRACTIONAL: ±1/64 ANGULAR: X* ±1*0' DECIMAL: .X ±.030	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING 3) BREAK CORNERS & EDGES. 005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	FED 02/28/11
	CHECKED:	STW 02/28/11
\\ \tau = \tau \\	APPROVED:	STW 02/28/11

UNLESS OTHERWISE SPECIFIED

SV Microwave, Inc.

2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409

SMPM SB MALE 2-HOLE FLANGE MOUNT FOR Ø.047 CABLE

SIZE CAGE CODE DWG. NO. B 95077 SF3211-60024 SCALE: 7:1 SHEET 1 OF 1