



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT DATA DRAWING

| REVISION HISTORY | | | |
|------------------|----------------|----------|----------|
| REV | DESCRIPTION | DATE | APPROVED |
| 1 | PRELIMINARY | 09/13/07 | JM |
| A | REL. NRN 34346 | 09/25/07 | STW |
| B | DCN 35853 | 06/08 | STW |

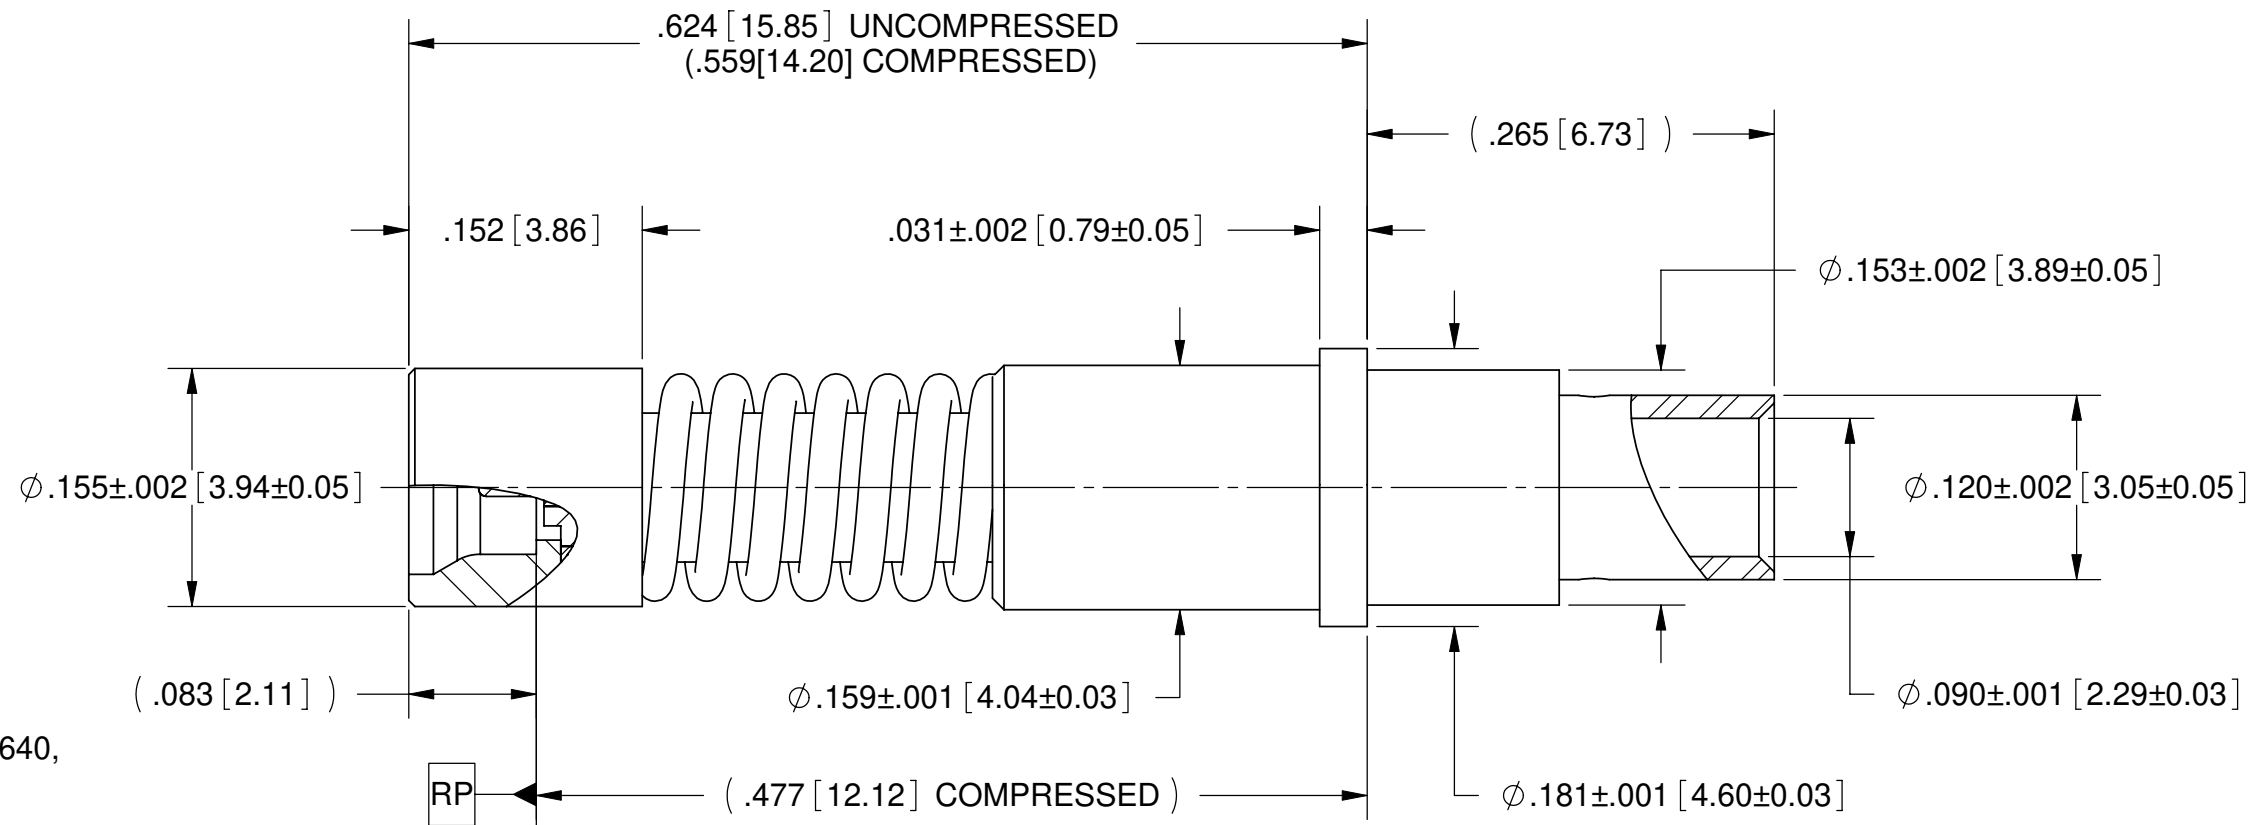

- MATERIAL:**
- SHROUD & SLEEVE:** STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
- BODY & CONTACT:** BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- SPRING:** STAINLESS STEEL PER ASTM A313, TYPE 631 ALLOY UNS S17700
- INSULATOR:** PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B
- FINISH:**
- SHROUD SLEEVE & SPRING:** PASSIVATED PER AMS-2700, TYPE 2
- BODY & CONTACT :** GOLD PER ASTM B488, TYPE II, CODE C, CLASS 1.27; OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.

- PERFORMANCE:**
- IMPEDANCE:** 50 OHMS
 - FREQ. RANGE:** DC TO 65.0 GHz
 - DWV:** 325 VRMS
 - OPERATING TEMP.:** -55°C TO +125°C
 - VSWR:** 1.10:1 DC TO 26.5 GHz, 1.30:1 TYPICAL TO 50 GHz
 - INSERTION LOSS:** .12 X SQRT(F(F IN GHz))
 - INSUL. RESISTANCE:** 5000 MEGOHMS MIN.
 - CONTACT RESISTANCE**
 - OUTER CONDUCTOR:** 2 MILLIOHMS MAX.
 - INNER CONDUCTOR:** 6 MILLIOHMS MAX.
 - ENGAGEMENT/ DISENGAGEMENT:** 2.5 LBS MAX. ENGAGEMENT
1.5 LBS MIN. DISENGAGEMENT

SOCKET CONTACT

| | | | |
|--|---|---|---|
| MATERIAL: SEE NOTES | DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X'X' ±15' | UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS | SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 |
| FINISH: SEE NOTES | DECIMAL: .X ±.030 .XX ±.010 .XXX ±.005 | INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994 | TITLE: SMPM, MALE TO T-FLEX 405 SMOOTH BORE INTERFACE FIT M38999 SIZE 12 INSERT |
| SURFACE AREA: N/A | THIRD ANGLE PROJECTION | DRAWN: JMC 09/04/07 | SIZE: B CAGE CODE: 95077 DWG. NO.: SF3211-6004 |
| PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED. | | CHECKED: JM 09/04/07 APPROVED: JM 09/04/07 | SCALE: 4:1 SHEET 1 OF 1 |