

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









ROHS COMPLIANT

PRODUCT DATA DRAWING



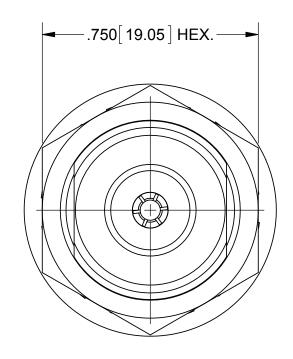

MATERIAL:

BODY, HEX NUT & CLAMP NUT:

STAINLESS STEEL PER AMS-5640,

ALLOY UNS S30300, TYPE 1

CONTACT: BERYLLIUM COPPER PER ASTM B196,

ALLOY No. UNS C17300, TD04

INSULATOR: PTFE PER ASTM D1710, TYPE I, GRADE 1, CLASS B

LOCK WASHER: 300 SERIES STAINLESS STEEL

O-RINGS: SILICONE RUBBER PER A-A-59588, CLASS 2B,

GRADE 60 OR 70

FINISH:

BODY, LOCK WASHER, & HEX NUT:

PASSIVATED PER AMS-2700

CLAMP NUT &

CONTACT: GOLD PER ASTM B488, TYPE II, CODE C, CLASS .76,


OVER NICKEL PER AMS-QQ-N-290, CLASS 1


PERFORMANCE:

IMPEDANCE: 50 OHMS

FREQ. RANGE: DC TO 12.4 GHz VSWR: 1.25:1 DC TO 12.4 GHz .05 X SQRT(F(F IN GHz)) 1000 VRMS **INSERTION LOSS:**

DWV:

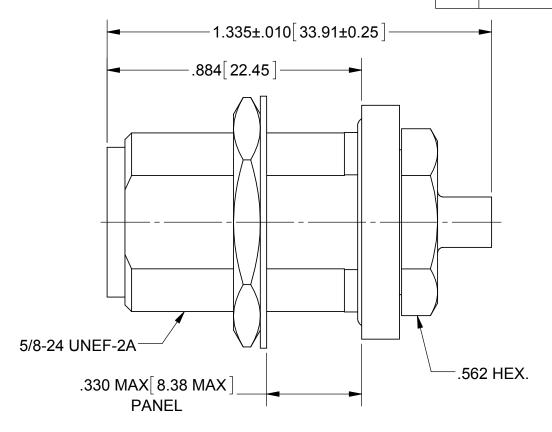

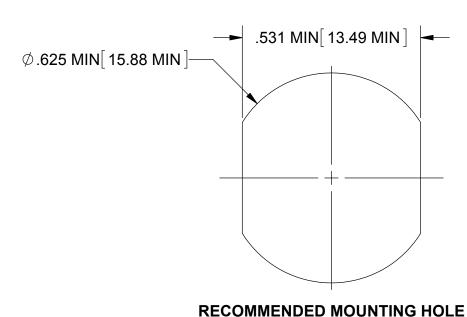

DAL 09/30/15

BNK 09/30/15

BNK 09/30/15

UNLESS OTHERWISE SPECIFIED

APPROVED:

MATER	RIAL: S	EE NOT	ES
FINISH	S	EE NOT	ES
SURFA	CE AREA:	N/A	
	PRO	PRIETARY	
IS THE ANY RI WITHO	SOLE PROPE PRODUCTION UT THE WRIT	CONTAINED IN 1 RTY OF SV MIC N IN PART OR A TEN PERMISSIC S IS PROHIBITEI	ROWAVE, I S A WHOLE N OF

	DIMENSIONS ARE IN INCHES TOLERANCES				
	FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' +15'				
	DECIMAL: .X ±.030 .XX +.010				
	.XXX ±.005				
	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994				
WING E, INC.	THIRD ANGLE PROJECTION				
i, inc.					

FRACTIONAL: ±1/64 ANGULAR: X° ±1°0' X°X' ±15' DECIMAL: .X ±.030 Xx ±.010 XX ±.010 XXX ±.005 INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	1) ALL DIMENSIONS ARE IN INCHES [MILLIMETERS] 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES. 005 F. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SUFFACE ROUGHNESS 63-MIL-STD-10. 6) DIA.'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN. 005 T.I.R. 7) REMOVE ALL BURRS	
THIRD ANGLE PROJECTION	DRAWN:	DAL 09/30/
+ 1	CHECKED:	BNK 09/30/



PN FEMALE BULKHEAD FOR Ø.141 CABLE

SF6545-6003 B 95077 SCALE: 3:1