



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IR-Lumineszenzdiode (850 nm) mit hoher Ausgangsleistung
High Power Infrared Emitter (850 nm)
Lead (Pb) Free Product - RoHS Compliant
SFH 4230



Wesentliche Merkmale

- Punktlichtquelle mit hohem Wirkungsgrad bei geringer Baugröße
- Chipgröße (emittierende Fläche) 1 x 1 mm²
- max. Gleichstrom 1 A
- niedriger Wärmewiderstand (15 K/W)
- Emissionswellenlänge 850 nm
- ESD-sicher bis 2 kV nach JESD22-A114-B

Anwendungen

- Infrarotbeleuchtung für CMOS Kameras
- Überwachungssysteme
- IR-Datenübertragung
- Fahrer-Assistenz Systeme
- Maschinensicherheit

Sicherheitshinweise

Je nach Betriebsart emittieren diese Bauteile hochkonzentrierte, nicht sichtbare Infrarot-Strahlung, die gefährlich für das menschliche Auge sein kann. Produkte, die diese Bauteile enthalten, müssen gemäß den Sicherheitsrichtlinien der IEC-Normen 60825-1 und 62471 behandelt werden.

Features

- Point lightsource with high efficiency and small package
- die-size (emitting area) 1 x 1 mm²
- max. DC-current 1 A
- Low thermal resistance (15 K/W)
- Maximum of spectral emission at 850 nm
- ESD safe up to 2 kV acc. to JESD22-A114-B

Applications

- Infrared Illumination for CMOS cameras
- Surveillance systems
- IR Data Transmission
- Driver assistance systems
- Machine security

Safety Advices

Depending on the mode of operation, these devices emit highly concentrated non visible infrared light which can be hazardous to the human eye. Products which incorporate these devices have to follow the safety precautions given in IEC 60825-1 and IEC 62471.

Typ Type	Bestellnummer Ordering Code	Gesamtstrahlungsfluss ¹⁾ ($I_F = 1A, t_p = 100 \mu s$) Total Radiant Flux ¹⁾ Φ_e (mW)
SFH 4230	Q65110A4023	typ. 440

¹⁾ gemessen mit Ulbrichtkugel / measured with integrating sphere

Grenzwerte ($T_A = 25\text{ °C}$)**Maximum Ratings**

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Betriebs- und Lagertemperatur Operating and storage temperature range	T_{op}, T_{stg}	- 40 ... + 100	°C
Sperrschichttemperatur Junction temperature	T_J	+ 125	°C
Sperrspannung Reverse voltage	V_R	1	V
Vorwärtsgleichstrom Forward current	I_F	1	A
Stoßstrom, $t_p < 1\text{ ms}$, $D = 0.2$ Surge current	I_{FSM}	2	A
Leistungsaufnahme Power consumption	P_{tot}	2.4	W
Wärmewiderstand Sperrschicht - Lötstelle bei Montage auf Metall-Block Thermal resistance junction - soldering point, mounted on metal block	R_{thJS}	15	K/W

Kennwerte ($T_A = 25\text{ °C}$)**Characteristics**

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Wellenlänge der Strahlung Wavelength at peak emission $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	λ_{peak}	850	nm
Centroid-Wellenlänge der Strahlung Centroid wavelength $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	$\lambda_{centroid}$	845	nm
Spektrale Bandbreite bei 50% von I_{max} Spectral bandwidth at 50% of I_{max} $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	$\Delta\lambda$	40	nm
Abstrahlwinkel Half angle	φ	± 60	Grad deg.
Aktive Chipfläche Active chip area	A	1	mm ²
Abmessungen der aktiven Chipfläche Dimension of the active chip area	$L \times B$ $L \times W$	1×1	mm ²

Kennwerte ($T_A = 25\text{ °C}$)

Characteristics (cont'd)

Bezeichnung Parameter	Symbol Symbol	Wert Value	Einheit Unit
Schaltzeiten, I_e von 10% auf 90% und von 90% auf 10%, $I_F = 1\text{ A}$, $R_L = 50\ \Omega$ Switching times, I_e from 10% to 90% and from 90% to 10%, $I_F = 1\text{ A}$, $R_L = 50\ \Omega$	t_r, t_f	10	ns
Durchlassspannung Forward voltage $I_F = 1\text{ A}$, $t_p = 100\ \mu\text{s}$	V_F	1.8 (< 2.4)	V
Strahlstärke Radiant intensity $I_F = 1\text{ A}$, $t_p = 100\ \mu\text{s}$	$I_{e\text{ typ}}$	170	mW/sr
Temperaturkoeffizient von I_e bzw. Φ_e Temperature coefficient of I_e or Φ_e $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	TC_I	- 0.5	%/K
Temperaturkoeffizient von V_F Temperature coefficient of V_F $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	TC_V	- 0.2	mV/K
Temperaturkoeffizient von λ Temperature coefficient of λ $I_F = 1\text{ A}$, $t_p = 10\text{ ms}$	$TC_{\lambda, \text{centroid}}$	+ 0.2	nm/K


Gesamtstrahlungsfluss¹⁾ Φ_e
Total Radiant Flux¹⁾ Φ_e

Bezeichnung Parameter	Symbol	Werte Values		Einheit Unit
		SFH 4230-CW	SFH 4230-DW	
Gesamtstrahlungsfluss Total Radiant Flux $I_F = 1 \text{ A}, t_p = 100 \mu\text{s}$	$\Phi_{e \text{ min}}$ $\Phi_{e \text{ max}}$	250 500	400 800	mW mW

¹⁾ Nur eine Gruppe in einer Verpackungseinheit (Streuung kleiner 2:1) /
 Only one group in one packing unit (variation lower 2:1)


Abstrahlcharakteristik

Radiation Characteristics $I_{\text{rel}} = f(\varphi)$

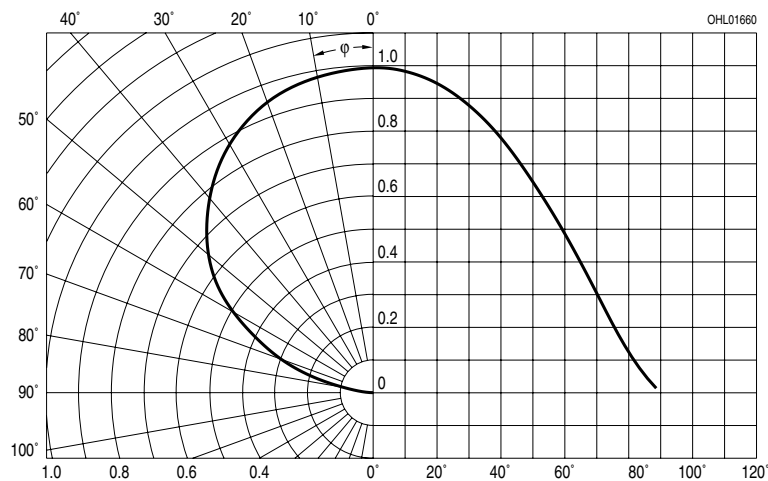

Relative spektrale Emission
Relative Spectral Emission


$I_{rel} = f(\lambda)$

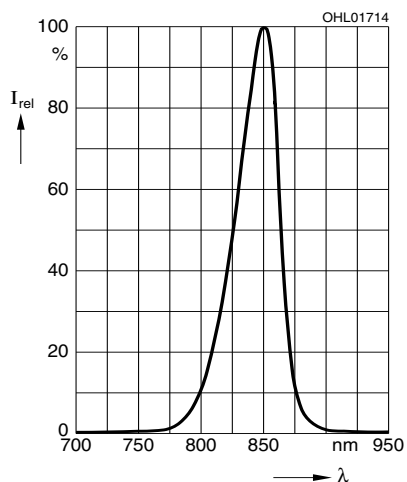

Durchlassstrom
Forward Current

$I_F = f(V_F)$


Single pulse, $t_p = 100 \mu s$

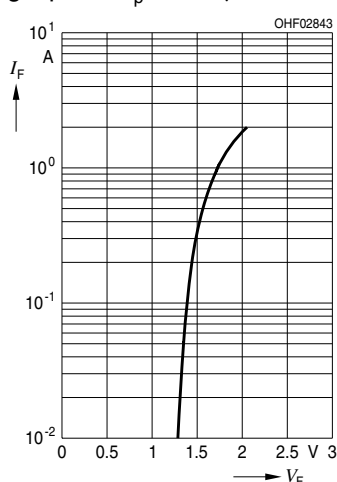

Relativer Gesamtstrahlungsfluss
Relative Total Radiant Flux


$\Phi_e / \Phi_e(1000mA) = f(I_F)$

Single pulse, $t_p = 100 \mu s$

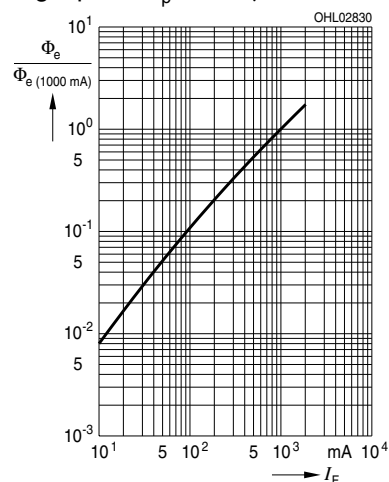


Max. zulässiger Durchlassstrom
Max. Permissible Forward Current

$I_F = f(T_A), R_{thJS} = 15 \text{ K/W}$

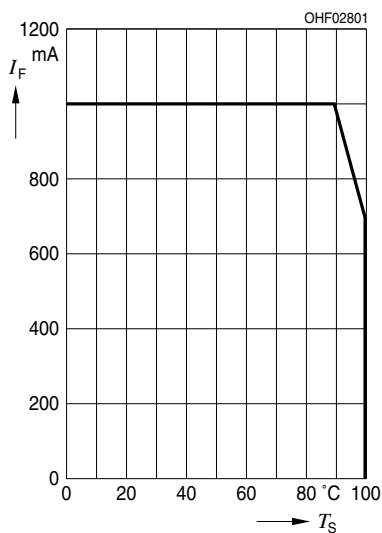


Zulässige Impulsbelastbarkeit
Permissible Pulse Handling

Capability $I_F = f(t_p), T_A < 85 \text{ }^\circ\text{C}$,
Duty cycle $D = \text{parameter}$

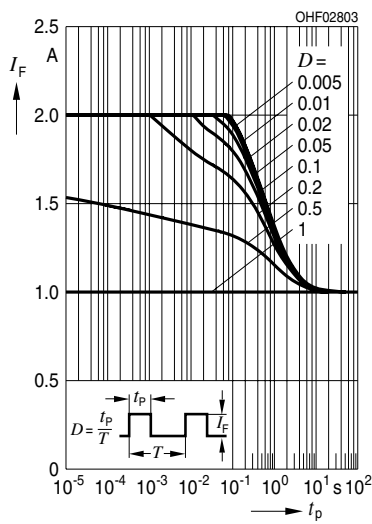

Maßzeichnung¹⁾
Package Outlines

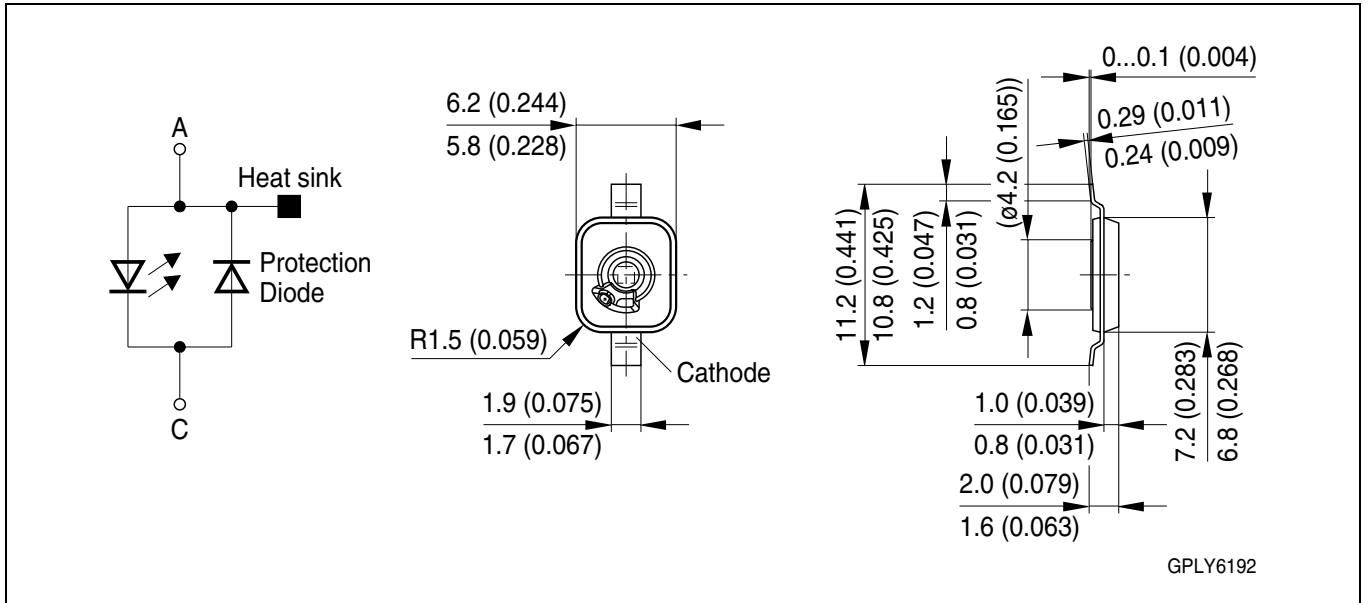


Kathodenkennung:
Cathode mark:
Gewicht / Approx. weight:

Markierung
mark
0.2 g


Gurtung / Polarität und Lage
Method of Taping / Polarity and Orientation

Verpackungseinheit 800/Rolle, ø180 mm
Packing unit 800/reel, ø180 mm

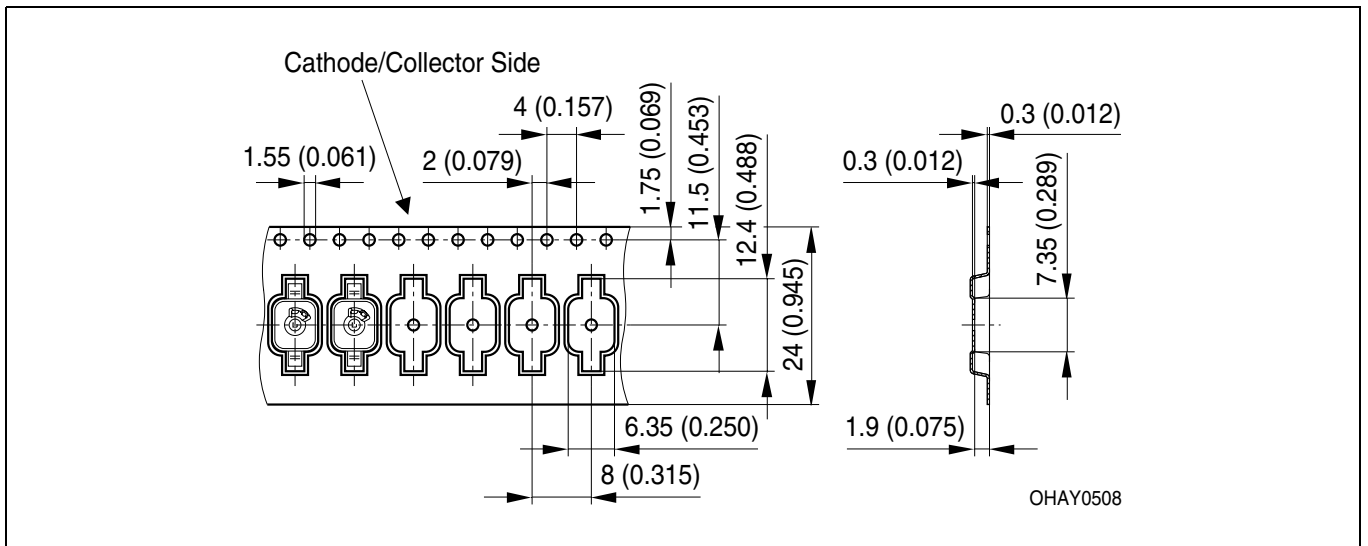

¹⁾ Maße in mm (inch) / Dimensions in mm (inch)

Empfohlenes Lötpaddesign Recommended Solder Pad Design

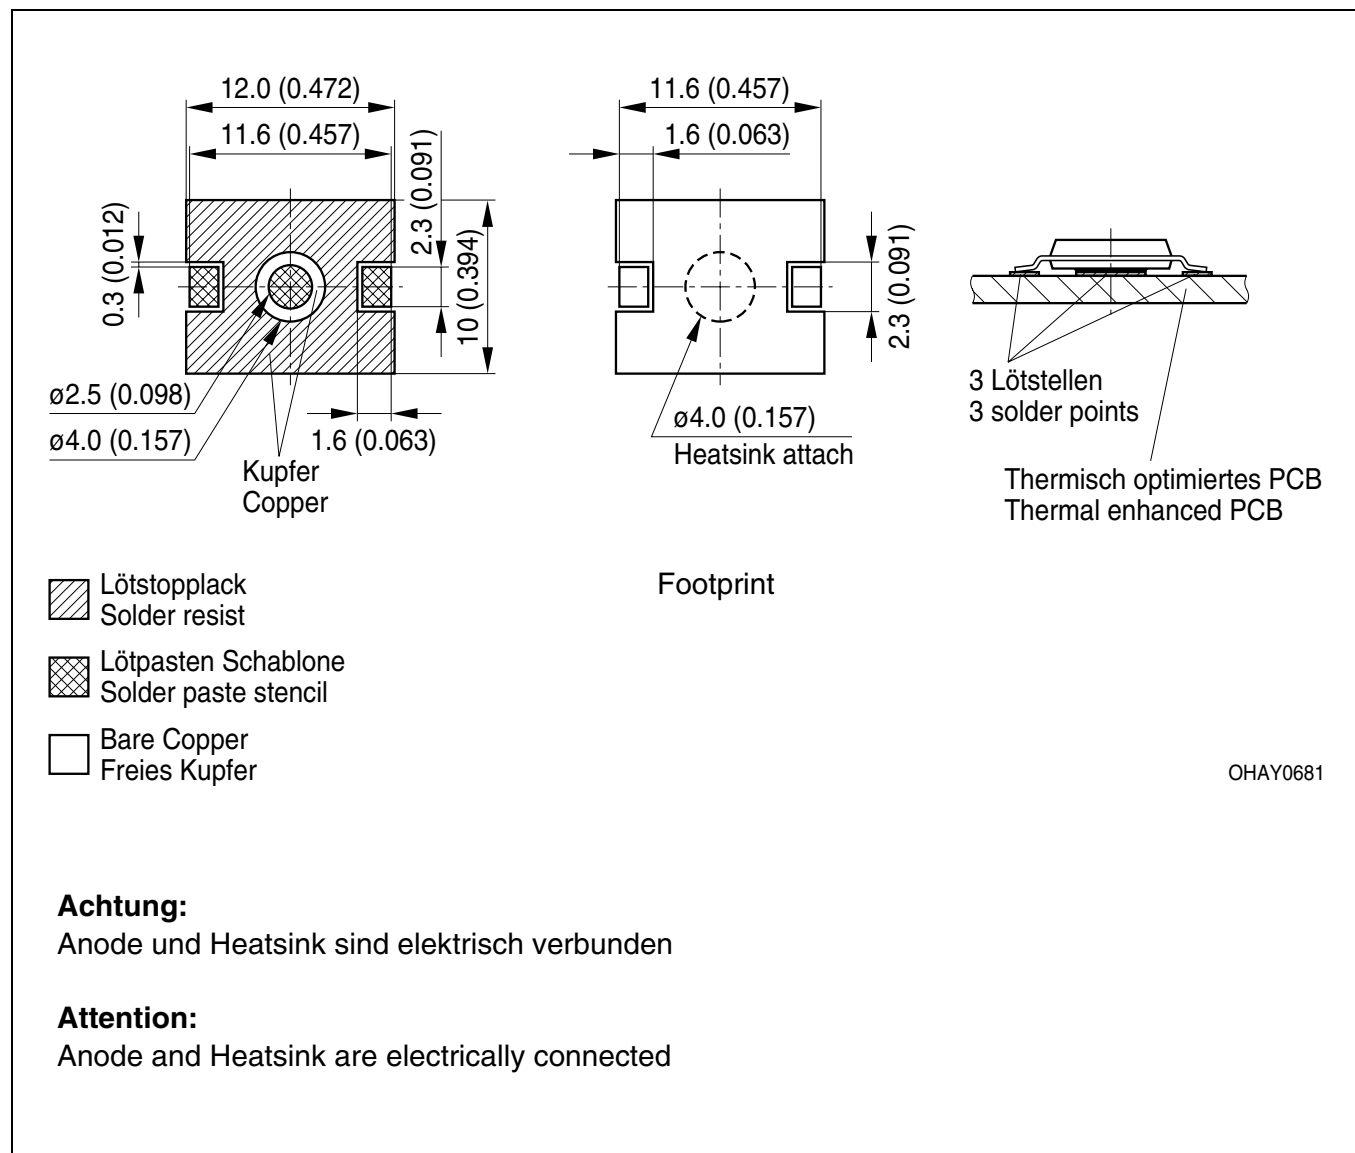

Achtung:

Anode und Heatsink sind elektrisch verbunden


Attention:

Anode and Heatsink are electrically connected

Lötbedingungen Soldering Conditions

Reflow Lötprofil für bleifreies Löten
Reflow Soldering Profile for lead free soldering

Vorbehandlung nach JEDEC Level 4
Preconditioning acc. to JEDEC Level 4
(nach J-STD-020C)
(acc. to J-STD-020C)

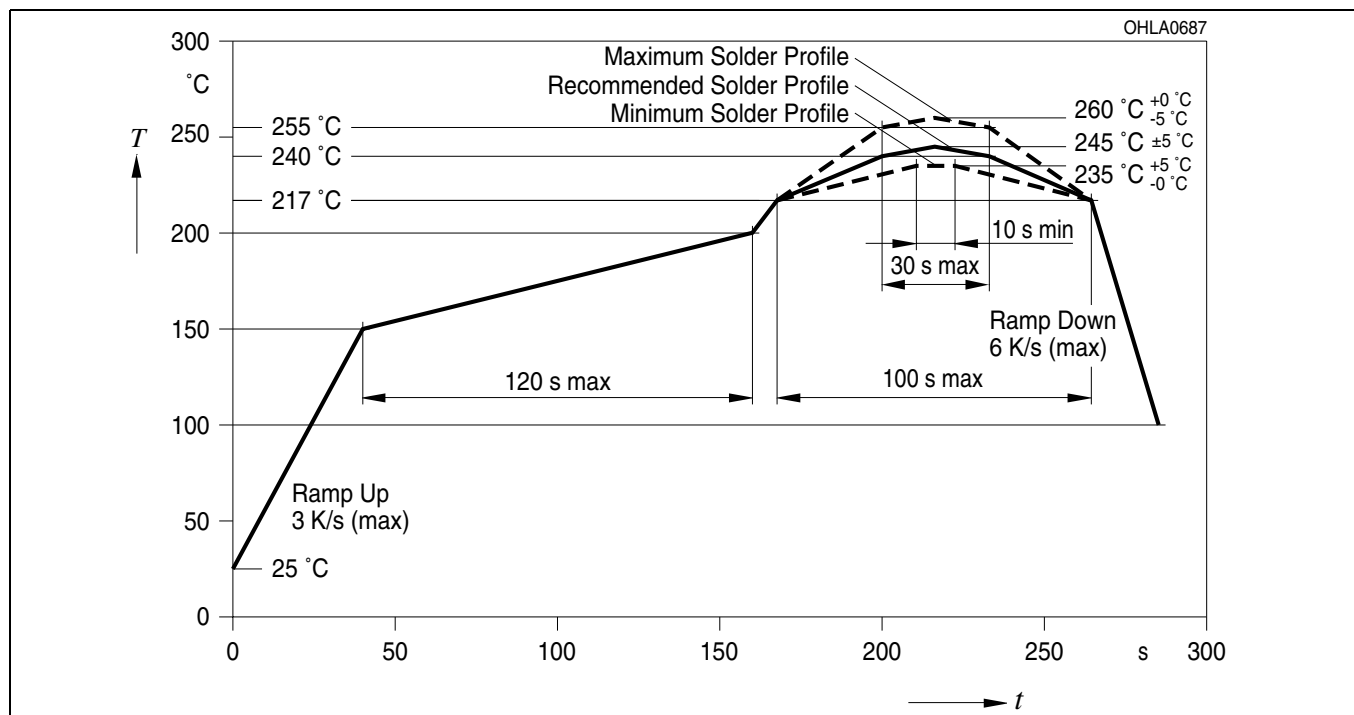

Published by
OSRAM Opto Semiconductors GmbH
Wernerwerkstrasse 2, D-93049 Regensburg
www.osram-os.com
© All Rights Reserved.

The information describes the type of component and shall not be considered as assured characteristics. Terms of delivery and rights to change design reserved. Due to technical requirements components may contain dangerous substances. For information on the types in question please contact our Sales Organization.

Packing

Please use the recycling operators known to you. We can also help you – get in touch with your nearest sales office. By agreement we will take packing material back, if it is sorted. You must bear the costs of transport. For packing material that is returned to us unsorted or which we are not obliged to accept, we shall have to invoice you for any costs incurred.

Components used in life-support devices or systems must be expressly authorized for such purpose! Critical components¹, may only be used in life-support devices or systems² with the express written approval of OSRAM OS.

¹ A critical component is a component used in a life-support device or system whose failure can reasonably be expected to cause the failure of that life-support device or system, or to affect its safety or effectiveness of that device or system.

² Life support devices or systems are intended (a) to be implanted in the human body, or (b) to support and/or maintain and sustain human life. If they fail, it is reasonable to assume that the health of the user may be endangered.

EU RoHS and China RoHS compliant product



此产品符合欧盟 RoHS 指令的要求；
按照中国的相关法规和标准，不含有毒有害物质或元素。