



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





RFMD Green, RoHS Compliant, Pb-Free (Z Part Number)
Package: SOT-89


Product Description

RFMD's SGA-9289 is a high performance transistor designed for operation to 3GHz. With optimal matching at 2GHz, $OIP_3=42.5\text{dBm}$, and $P_{1\text{dB}}=27.5\text{dBm}$. This RF device is based on a Silicon Germanium Heterostructure Bipolar Transistor (SiGe HBT) process. The SGA-9289 is cost-effective for applications requiring high linearity even at moderate biasing levels. It is well suited for operation at both 5V and 3V. The matte tin finish on the lead-free package utilizes a post annealing process to mitigate tin whisker formation and is RoHS compliant per EU Directive 2002/95. This package is also manufactured with green molding compounds that contain no antimony trioxide nor halogenated fire retardants.

Optimum Technology Matching® Applied

- GaAs HBT
- GaAs MESFET
- InGaP HBT
- SiGe BiCMOS
- Si BiCMOS
- SiGe HBT
- GaAs pHEMT
- Si CMOS
- Si BJT
- GaN HEMT
- RF MEMS

Typical G_{max} , OIP_3 , $P_{1\text{dB}}$ @ 5V, 270mA

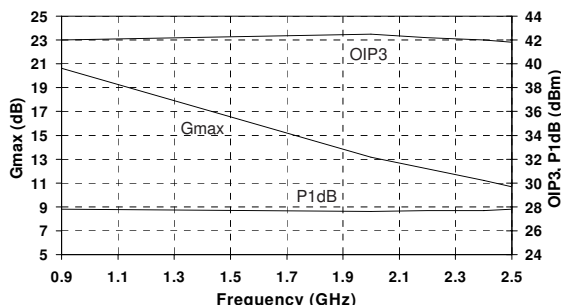

Features

- Available in RoHS Compliant and Green Packaging
- 50MHz to 3000MHz Operation
- 42.5dBm Output IP_3 Typ. at 1.96GHz
- 12.0dB Gain Typ. at 1.96GHz
- 27.5dBm $P_{1\text{dB}}$ Typ. at 1.96GHz
- 2.4dB NF Typ. at 0.9GHz
- Cost-Effective
- 3V to 5V Operation

Applications

- Wireless Infrastructure Driver Amplifiers
- CATV Amplifiers
- Wireless Data, WLL Amplifiers
- AN-022 Contains Detailed Application Circuits

Parameter	Specification			Unit	Condition
	Min.	Typ.	Max.		
Maximum Available Gain		20.5		dB	900MHz, $Z_S=Z_S^*$, $Z_L=Z_L^*$
		13.1		dB	1960MHz
Power Gain	16.2	17.7	19.2	dB	900MHz [1], $Z_S=Z_{\text{SOPT}}$, $Z_L=Z_{\text{LOPT}}$
	11.0	12.0	13.0	dB	1960MHz [2]
Output Power at 1dB Compression		28.0		dBm	900MHz, $Z_S=Z_{\text{SOPT}}$, $Z_L=Z_{\text{LOPT}}$
	26.0	27.5		dBm	1960MHz [2]
Output Third Order Intercept Point		42.0		dBm	900MHz, $Z_S=Z_{\text{SOPT}}$, $Z_L=Z_{\text{LOPT}}$, $P_{\text{OUT}}=+13\text{dBm}$ per tone
	40.0	42.5		dBm	1960MHz [2]
Noise Figure		2.4		dB	900MHz, $Z_S=Z_{\text{SOPT}}$, $Z_L=Z_{\text{LOPT}}$
		2.5		dB	1960MHz
DC Current Gain	100	180	300		
Breakdown Voltage	7.5	8.5		V	collector - emitter
Thermal Resistance		32		$^{\circ}\text{C}/\text{W}$	junction - lead
Device Operating Voltage			5.5	V	collector - emitter
Operating Current	250	280	320	mA	

Test Conditions: $V_{\text{CE}}=5\text{V}$, $I_{\text{CQ}}=280\text{mA}$ (unless otherwise noted), $T_L=25^{\circ}\text{C}$.

[1] 100% Tested [2] Sample Tested

Absolute Maximum Ratings

Parameter	Rating	Unit
Max Base Current (I_B)	10	mA
Max Device Current (I_{CE})	400	mA
Max Collector-Emitter Voltage (V_{CE0})	7	V
Max Collector-Base Voltage (V_{CBO})	20	V
Max Emitter-Base Voltage (V_{EBO})	4.8	V
Max Junction Temp (T_J)	+150	°C
Operating Temp Range (T_L)	See Graph	
Max Storage Temp	+150	°C



Caution! ESD sensitive device.

Exceeding any one or a combination of the Absolute Maximum Rating conditions may cause permanent damage to the device. Extended application of Absolute Maximum Rating conditions to the device may reduce device reliability. Specified typical performance or functional operation of the device under Absolute Maximum Rating conditions is not implied.

RoHS status based on EU Directive 2002/95/EC (at time of this document revision).

The information in this publication is believed to be accurate and reliable. However, no responsibility is assumed by RF Micro Devices, Inc. ("RFMD") for its use, nor for any infringement of patents, or other rights of third parties, resulting from its use. No license is granted by implication or otherwise under any patent or patent rights of RFMD. RFMD reserves the right to change component circuitry, recommended application circuitry and specifications at any time without prior notice.

*Note: Load condition 1, $Z_L = 50 \Omega$.

Operation of this device beyond any one of these limits may cause permanent damage. For reliable continuous operation, the device voltage and current must not exceed the maximum operating values specified in the table on page one.

Bias Conditions should also satisfy the following expression:

$$I_D V_D < (T_J - T_L) / R_{TH, j-l} \text{ and } T_L = T_{LEAD}$$

Typical Performance with Engineering Application Circuit

Freq (MHz)	VCE (V)	ICQ (mA)	P1dB (dBm)	OIP3 ¹ (dBm)	Gain (dB)	S11 (dB)	S22 (dB)	NF (dB)	ZSOPT (Ω)	ZSOPT (Ω)
945	5	287	27.8	42.0	17.8	-19	-11	2.5	2.93 - j3.92	15.81 + j1.57
1960	5	292	27.5	42.0	12.1	-24	-21	2.5	4.75 - j9.12	10.3 - j4.87
2140	5	293	27.7	42.0	11.1	-11	-20	2.8	4.30 - j9.09	13.4 + j2.31
2440	5	287	27.5	42.0	9.8	-17	-20	3.0	4.05 - j13.78	11.76 - j9.2

¹ $P_{OUT} = +13 \text{ dBm}$ per tone for $V_{CE} = 5 \text{ V}$, 1 MHz tone spacing



Typical Performance with Engineering Application Circuit

Freq (MHz)	VCE (V)	ICQ (mA)	P1dB (dBm)	OIP3 ² (dBm)	Gain (dB)	S11 (dB)	S22 (dB)	NF (dB)	ZSOPT (Ω)	ZSOPT (Ω)
945	3	312	25.4	38.6	16.8	-18	-9	2.6	5.61 - j4.75	6.51 + j2.58
1960	3	315	26.0	39.3	11.0	-18	-15	2.9	3.23 - j5.67	4.95 + j1.73
2440	3	315	26.1	38.0	9.4	-29	-17	3.4	4.07 - 14.25	11.62 - j11.83





² $P_{OUT} = +10 \text{ dBm}$ per tone for $V_{CE} = 3 \text{ V}$, 1 MHz tone spacing

Data above represents typical performance of the application circuits notes in Application Note AN-022. Refer to the application note for additional RF data, PCB layouts, and BOMs for each application circuit. The application note also includes biasing instructions and other key issues to be considered. For the latest application notes please visit our site at www.RFMD.com or call your local sales representative.


Maximum Recommended Operational Dissipated Power

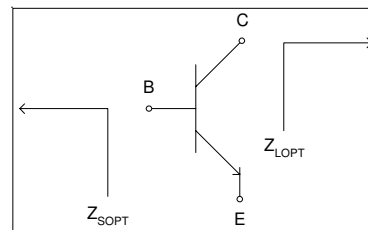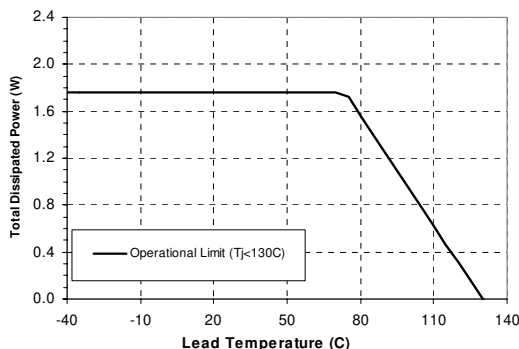

De-embedded S-Parameters ($Z_S=Z_L=50\text{ Ohms}$, $V_{CE}=5V$, $I_{CQ}=270mA$, 25°C)

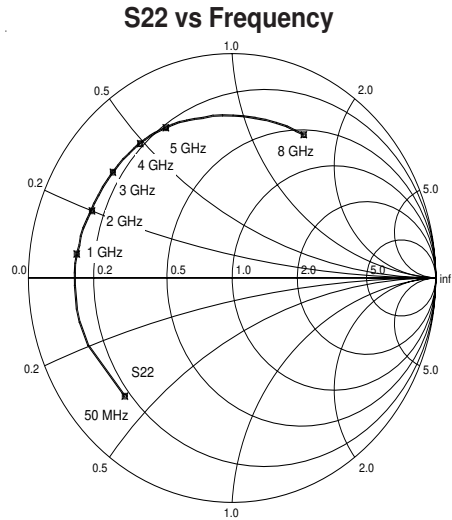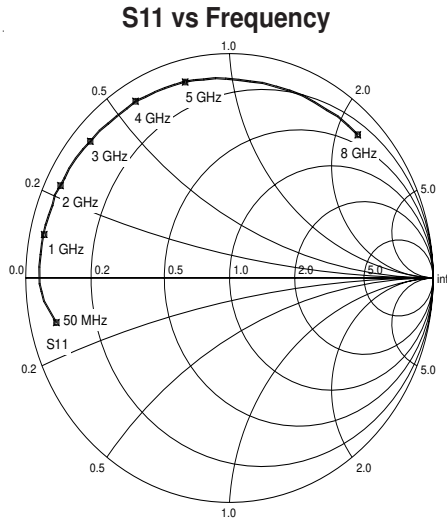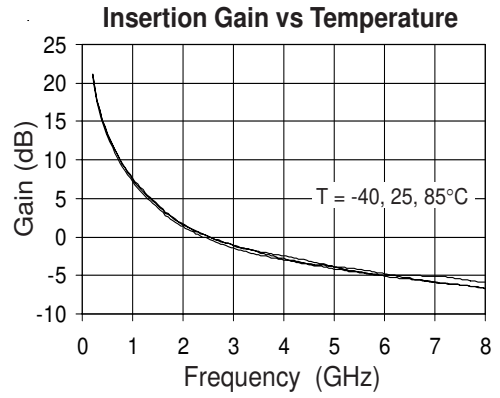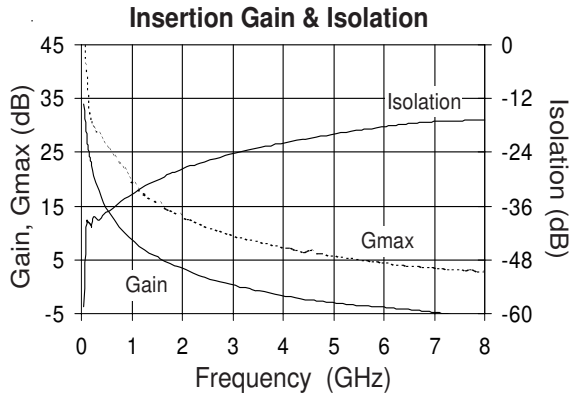


Note: S-parameters are de-embedded to the device leads with $Z_S=Z_L=50\Omega$. The data represents typical performance of the device. De-embedded s-parameters can be downloaded from our website

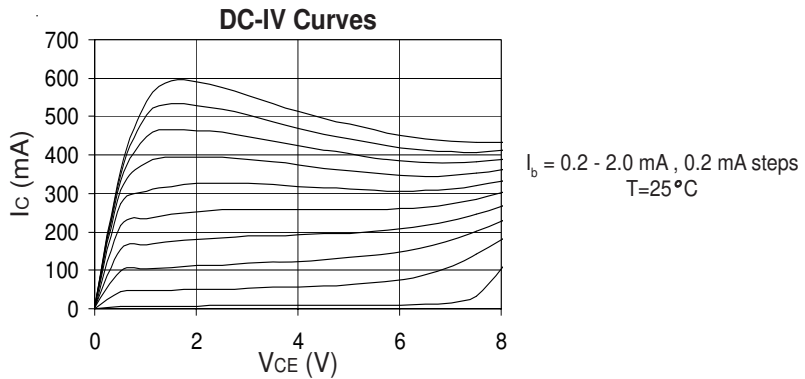

Pin	Function	Description
1	Base	RF input.
2	Emitter	Connection to ground. Use via holes to reduce lead inductance. Place vias as close to ground leads as possible.
3	Collector	RF output.
4	Emitter	Same as pin 2.

Recommended Mounting Configuration for Optimum RF and Thermal Performance

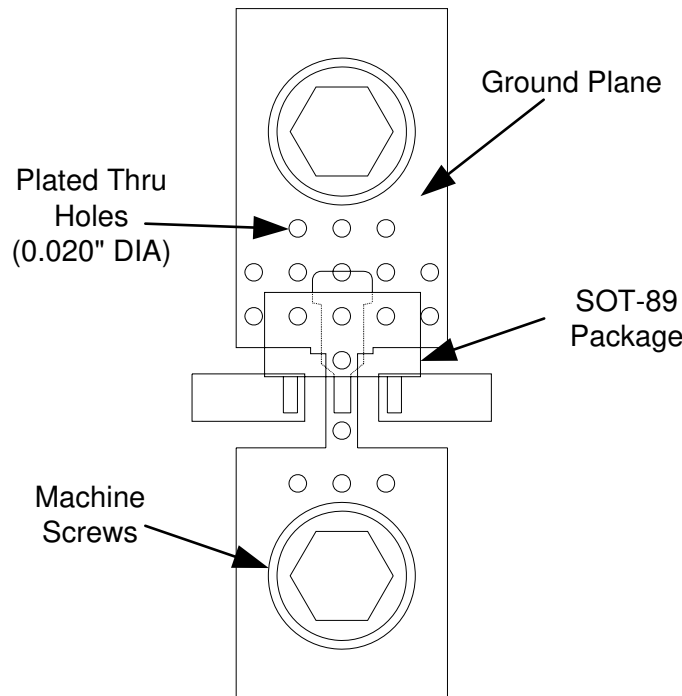


Mounting and Thermal Considerations

It is very important that adequate heat sinking be provided to minimize the device junction temperature. The following items should be implemented to maximize MTTF and RF performance.

1. Multiple solder-filled vias are required directly below the ground tab (pin 4). [CRITICAL]
2. Incorporate a large ground pad area with multiple plated-through vias around pin 4 of the device. [CRITICAL]
3. Use two point board seating to lower the thermal resistance between the PCB and mounting plate. Place machine screws as close to the ground tab (pin 4) as possible. [RECOMMENDED]
4. Use 2 ounce copper to improve the PCB's heat spreading capability. [RECOMMENDED]

Package Drawing

Dimensions in inches (millimeters)
Refer to drawing posted at www.rfmd.com for tolerances.

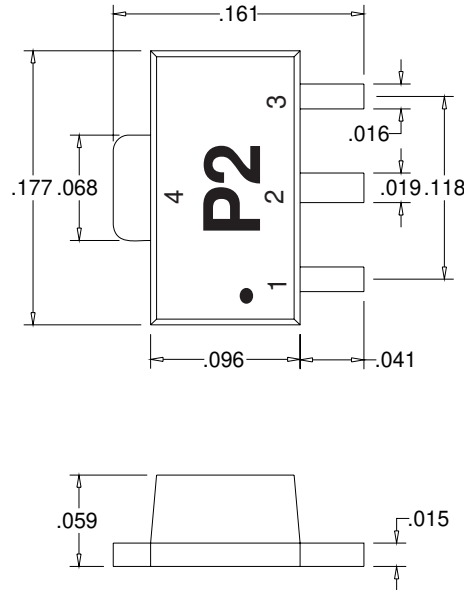

Part Symbolization

The part will be symbolized with the “P2” (“P2Z” for RoHS version) designator and a dot signifying pin 1 on the top surface of the package. Alternate marking “SGA9289Z” or “SGA9289” on line one with Trace Code on line two.

Ordering Information

Part Number	Reel Size	Devices/Reel
SGA-9289	13"	3000
SGA-9289Z	13"	3000

