



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






4:1 Shrinkable Polyolefin Tubing

Description: DAFLEX SH277 shrinkable irradiated polyolefin tubing recovers to 25% of its supplied size when full recovery is permitted. Material will shrink with the application of 120°C (250°F), is rated for continuous operation from -55° C to +135°C, and will withstand up to 300°C (572°F) for short durations.

SH277 is flame retardant and meets or exceeds the specified properties of MIL-I-23053/5 Class 1 and 3. Its longitudinal shrinkage is a maximum of 10%. DAFLEX SH277 can be hot stamped.

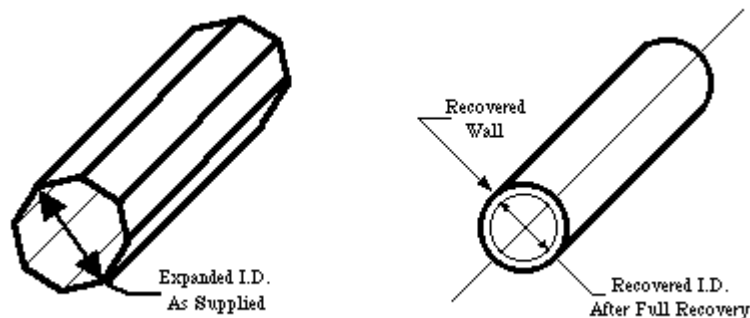

Typical applications are where tubing must fit over a large object such as in the repair or replacement of cable jacketing.

| DABURN Cat. No. | Expanded ID Max | | Recovered ID Max | | Recovered Wall | | Standard Package | Click to Order Prototype Quantities |
|--------------------|-----------------|-------|------------------|------|----------------|-----|---------------------|--|
| | IN. | MM. | IN. | MM. | IN. | MM. | | |
| SH277-1" | 1.0 | 25.4 | .25 | 6.5 | .06 | 1.5 | 20', 60', 120' | Order |
| SH277-2" | 2.0 | 50.8 | .50 | 12.7 | .06 | 1.5 | 20', 60', 120' | Order |
| SH277-3" | 3.0 | 76.2 | .75 | 19.0 | .06 | 1.5 | 15', 30', 75' | Order |
| SH277-4" | 4.0 | 101.6 | 1.0 | 25.4 | .06 | 1.5 | 15', 30', 75' | Order |

Standard Color: Black

SH277-1" & SH277-2" - 4 Ft. Lengths

Standard Packaging SH277-3" & SH277-4" - 3 Ft. Lengths

Recovered Wall dimensions are when full recovery is allowed.

Back to [New Products.](#)

To [Additional Heat Shrink.](#)

To [Heat Shrink X-Reference Chart.](#)

Back to DABURN'S [Home Page.](#)

Daburn electronics & cable corp.
224 Pegasus Ave.
Northvale, NJ 07647
Tel: 201-768-5400
Fax: 201-768-9642
E-Mail: daburn@daburn.com
URL: <http://www.daburn.com/>