

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China









10-30 W Mini Radiant Heaters SHGM Series



Features


- Designed for use in small enclosure housing or for heating of isolated spots in sensitive areas
- Compact design
- Used in combination with Normally Closed Thermostat or Humidistat

Accessories

• Temperature Controls





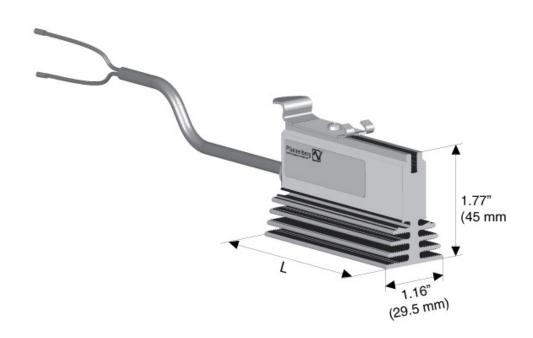

| | | Max. | | Ship Wt |
|----------|-------|---------|------|---------|
| Part No. | Watts | Current | L | lbs |
| SHGM1410 | 10 | 1 | 1.97 | 0.5 |
| SHGM1420 | 20 | 1.1 | 2.95 | 0.5 |
| SHGM1430 | 30 | 1.2 | 2.95 | 0.5 |

| Operating Voltage: | 110-250 AC 50/60 Hz |
|--------------------------|----------------------------------------------------|
| Heating Element: | Resistor, self regulating |
| Heating Body: | Aluminum, black anodised |
| Max surface temperature: | 10w @ 203°F/95°C 20w @239°F/115°C 30w @284°F/140°C |
| Connection: | Connecting cable 11.8" |

| Mounting: | Din rail 35mm profile |
|-------------------|------------------------------------------------------|
| Protection class: | IP20 |
| Approval: | UL Recognized Component, cUL Recognized Componet, CE |

Data subject to change without notice

© 2017. Hammond Manufacturing Ltd. All rights reserved.