

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



ELECTRICAL CHARACTERISTICS @ 25°C

OPERATING TEMPERATURE RANGE: : -40°C TO +85°C


1.0 INDUCTANCE:(P6-J6): (P1-J1) : 65 uH TYP @.01V, 10KHz

2.0 DC RESISTANCE: P6-J6 : .5 OHM MAX P3-J3 : .5 OHM MAX P2-J2 : .5 OHM MAX

P1-J1 : .5 OHM MAX P1-J1 : .5 OHM MAX

3.0 COMMON MODE: : CMA (-dB)

FREQUENCY (MHz)	TYPICAL	MIN	
1	8	5	
5	17	15	
20	23	15	
70	25	20	
200	22	17	
500	11	6	

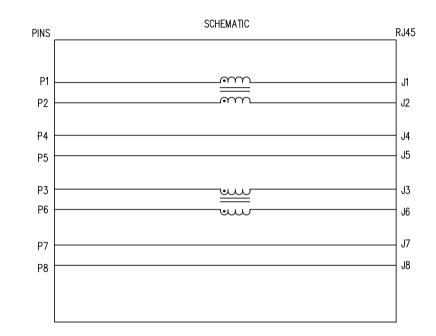

NOTES

1.0 PINS WITHOUT ELECTRICAL CONNECTION ARE OMITTED.

ORIGINATED BY	DATE	TITLE
Bain Liu	09-01-09	
DRAWN BY	DATE	
Bain Liu	09-01-09	

MagJack®

cMC

TAB DOWN,SHIELDED


	PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE	
	SI-60158-F			UNIT : INCH [mm]	REV.:
	FILE NAME	.X		SCALE: N/A	SIZE: A4
ı	SI-60158-F.DWG	.XX		1	
	31-00130-1.5449	XXX.	±0.005		PAGE:



A0


THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.







LED SPECIFICATION				
STANDARD LED WAVELENGTH		Forward V (MAX)	* (TYP)	
GREEN	565 nm	2.5 V	2.2 V	

*WITH A FORWARD CURRENT OF 20 mA (TYP)

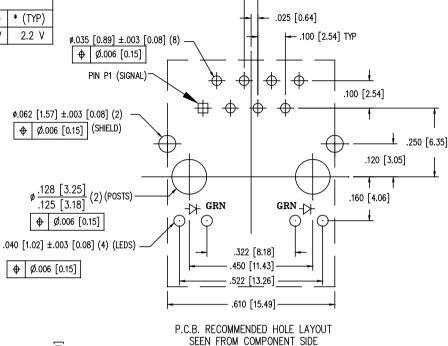



TITLE

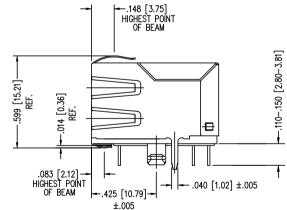

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: THERMOPLASTIC UL94 V-0 CONTACT/SHIELD: COPPER ALLOY SHIELD PLATING: NICKEL OR TIN CONTACT PLATING: SELECTIVE GOLD.

50 MICRO-INCHES MIN. IN CONTACT AREA.

- .050 [1.27] TYP

- 2. PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED. SEE ELECTRICAL DRAWING FOR OMITTED PINS.
- 3. TOLERANCES COMPLY WITH F.C.C. DIMENSION REQUIREMENTS.
- 4. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]

ALL CENTERLINE DIMENSIONS ARE BASIC.

5. WAVE SOLDER COMPATIBLE - PREHEAT 125°C/90SECS.

ORIGINATED BY	DATE
Bain Liu	09-01-09
DRAWN BY	DATE
Bain Liu	09-01-09


MagJack® CMC TAB DOWN, SHIELDED


PART NO. / DRAWING NO.	STANDARD DIM. TOL. IN INCH		[] METRIC DIM. AS REFERENCE	
SI-60158-F			UNIT : INCH [mm]	REV.: A0
FILE NAME	X		SCALE: N/A	SIZE : A4
SI-60158-F.DWG	.xx		SCALE. NA	SIZE . A4
31-00 150-F.DVVG	.XXX	±0.005		PAGE: 3



THE INFORMATION CONTAINED HEREIN IS CONSIDERED "PROPRIETARY" TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.



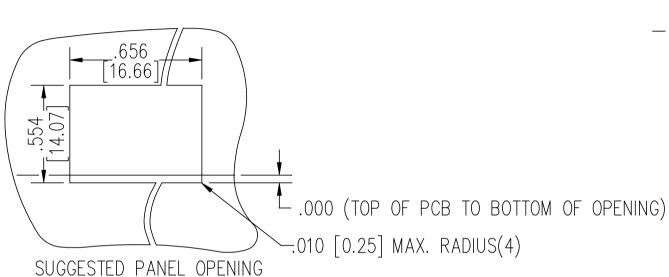

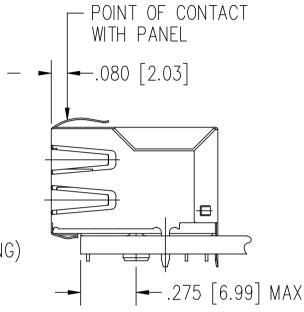

- 1. THE SUGGESTED PANEL OPENING IS INTENDED TO GIVE THE USER THE ABILITY TO HAVE REASONABLE JACK / PANEL CLEARANCES YET MAINTAIN RELIABLE GROUNDING CAPABILITY.
- 2. ALL TOLERANCES NOT OTHERWISE SPECIFIED TO BE ±.005 [0.13]

ORIGINATED BY	DATE	TITLE
Bain Liu	09-01-09	
DRAWN BY	DATE	
Bain Liu	09-01-09	

MagJack® CMC TAB DOWN, SHIELDED

I	PART NO. / DRAWING NO.	STANDARD DIM.		[] METRIC DIM. AS REFERENCE	
L	SI-60158-F	TOL. IN INCH		UNIT : INCH [mm]	REV.: A0
Γ	FILE NAME	.X		SCALE: N/A	SIZE: A4
ı	01.00450 5 0140	.XX		SCALE. NA	SIZE . A4
SI-60158-F.DWG	.xxx	±0.005		PAGE: 4	

