



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LED Module

LT-M092C

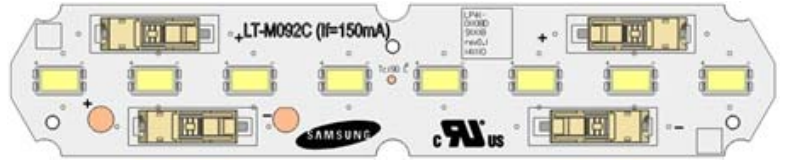

Samsung LT-M092C enables flexible design for various luminaries with narrow width and shapes.

Features & Benefits

- 3-step SDCM
- High performed LED – Samsung LM561B
- Suitable for linear, circular fixture

Applications

- Indoor Lighting
- Architectural / Residential Interior
- Linear / Cove Application
- Ceiling Light



Table of Contents

| | | | |
|----|-------------------------------|-------|----|
| 1. | Product Code Information | ----- | 3 |
| 2. | Characteristics | ----- | 4 |
| 3. | Structure and Assembly | ----- | 6 |
| 4. | Certification and Declaration | ----- | 9 |
| 5. | Label Structure | ----- | 10 |
| 6. | Packing Structure | ----- | 12 |
| 7. | Precautions in Handling & Use | ----- | 13 |

1. Product Code Information

| Nominal CCT (K) | Product Code |
|-----------------|----------------|
| 2700 | SI-B8W041100WW |
| 3000 | SI-B8V041100WW |
| 3500 | SI-B8U041100WW |
| 4000 | SI-B8T041100WW |

2. Characteristics

| Item | Rating | Unit | Remark |
|---|-----------|------------------|-----------------------------------|
| Rated Lifetime | >50,000 | hour | L70B50 @ $t_p = 55^\circ\text{C}$ |
| Ingress Protection (IP) | no rating | - | |
| Ambient / Operating Temperature (t_{amb}) | -20 ~ +50 | $^\circ\text{C}$ | |
| Storage Temperature | -30 ~ +80 | $^\circ\text{C}$ | |

| Item | Nom. CCT (K) | Rating | | | Unit | Remark |
|-----------------------------|-----------------|--------|------|------|--------------|---|
| | | Min | Typ. | Max | | |
| Luminous Flux (Φ_v) | 2700 | 313 | 350 | 381 | lm | |
| | 3000 | 317 | 353 | 386 | | |
| | 3500 | 322 | 356 | 392 | | |
| | 4000 | 327 | 360 | 398 | | |
| Luminous Efficacy | 2700 | 118 | 132 | 144 | lm/W | $I_f = 110\text{ mA}$ $t_p = 55^\circ\text{C}$ |
| | 3000 | 120 | 133 | 146 | | |
| | 3500 | 121 | 134 | 148 | | |
| | 4000 | 123 | 136 | 150 | | |
| CCT | 2700 | 2617 | 2688 | 2765 | K | |
| | 3000 | 2919 | 3008 | 3101 | | |
| | 3500 | 3289 | 3403 | 3523 | | |
| | 4000 | 3784 | 3930 | 4085 | | |
| Color Consistency (initial) | | - | 3 | - | MacAdam step | |
| Color Rendering Index (Ra) | | 80 | - | - | - | |
| Operating Current (I_f) | | 99 | 110 | 150 | mA | - |
| Operating Voltage (V_f) | | 21.6 | 24.0 | 26.4 | Vdc | $I_f = 110\text{ mA}$ $t_p = 55^\circ\text{C}$ |
| Power Consumption | | 2.38 | 2.64 | 2.90 | W | $t_p = 55^\circ\text{C}$ |

Notes:

- 1) t_p : temperature at which performance is specified; measured at "Tc point".
- 2) Samsung maintains a measurement tolerance of: Luminous flux: $\pm 7\%$, CRI: ± 3.0 , Voltage: $\pm 0.3\text{ V}$.

| Item | Nominal* | Life** | Max*** | Unit |
|-------------|--------------|-------------------|--------------|------|
| Temperature | 55 (t_p) | 55 ($t_{p,50}$) | 90 (t_c) | °C |


Notes:

- * Temperature used to specify performance of the module (t_p).
- ** Rated maximum performance temperature at which lifetime is specified ($t_{p,50}$).
- *** Rated maximum temperature, highest permissible temperature to avoid safety risk (t_c).

All temperatures are measured at the designated “Tc point” as indicated on the module.


3. Structure and Assembly

a) Appearance

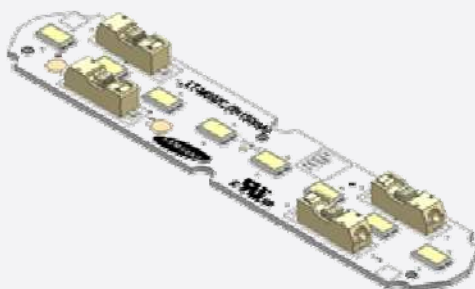


b) Dimension

| Dimension | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 91.0 | ±0.3 | mm |
| Module Width | 18.0 | ±0.3 | mm |
| Module Height | 5.2 | ±0.3 | mm |
| PCB Thickness | 1.0 | ±0.1 | mm |
| Module Weight | 4 | ±0.2 | g |

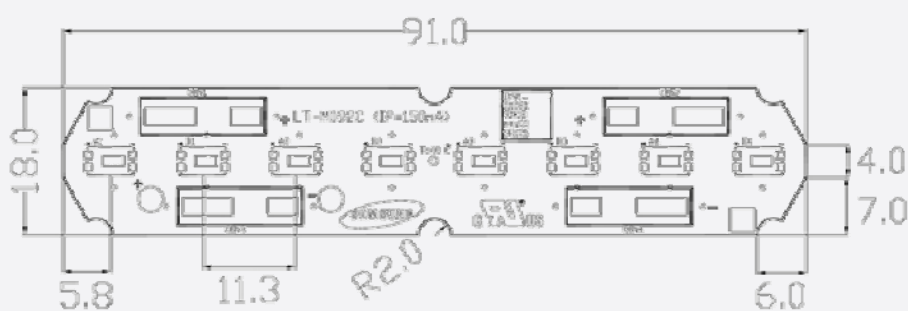

c) Assembly

Connectors on the board are provided for easy wiring with the LED driver and between modules

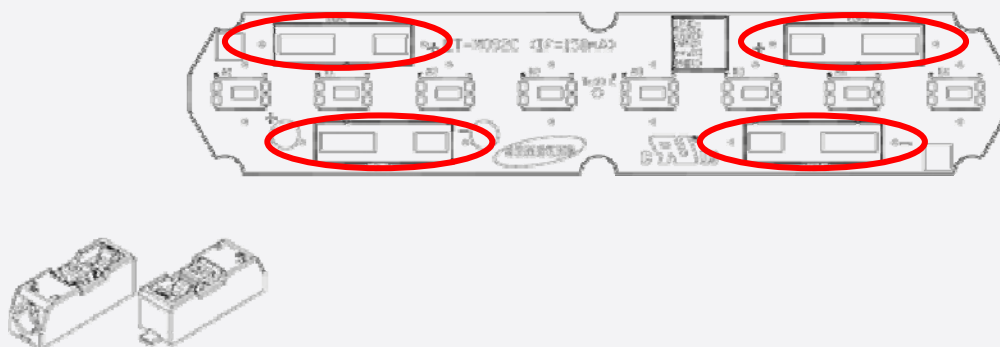


d) Structure

| Item | Specification |
|-----------|--|
| LED | LM561B Middle Power LED (8 pcs) |
| PCB | Material: copper, solder mask, epoxy |
| Connector | Reworkable poke-in connector type |
| Wire | 24~18 AWG; terminal strip length of 6~7 mm |


e) Light Distribution

Polar Intensity Diagram: Beam Angle $115 \pm 5^\circ$

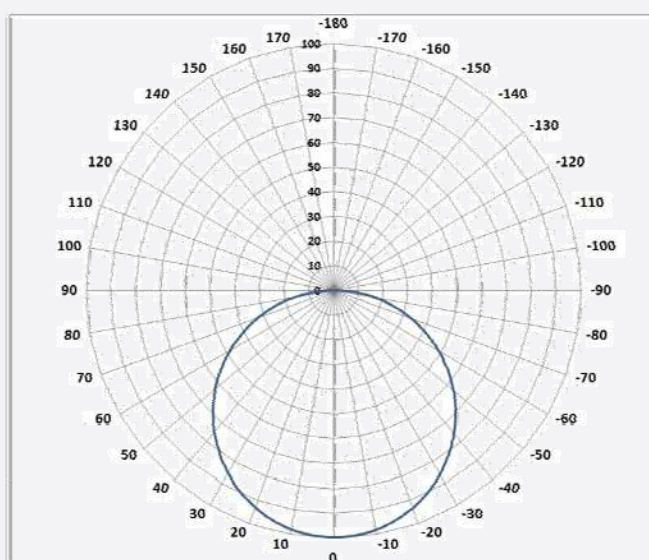


f) Thermal Management

Performance temperatures are measured on “Tc point” as indicated on the module.

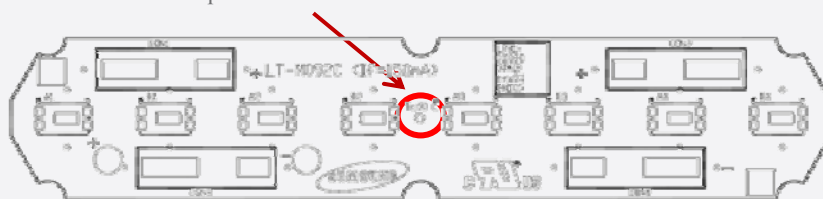

g) Schematic Circuit

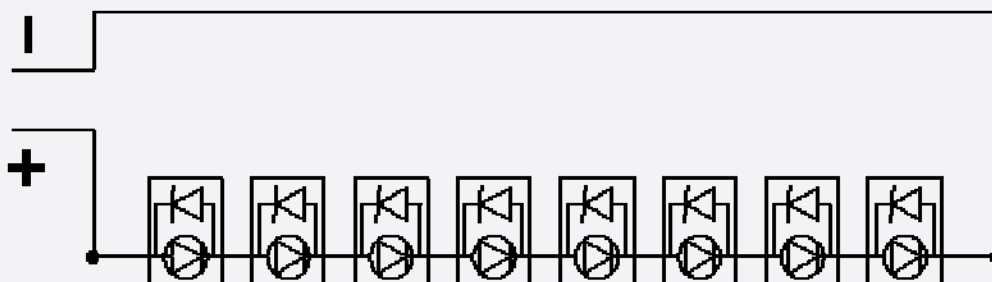


4. Certification and Declaration

| Item | Compliant to | Remark |
|----------------------|------------------------|--------------------------------|
| Test & Certification | UL / cUL for Component | UL8750 |
| Declaration | RoHS | Hazardous Substance & Material |
| | REACH | Hazardous Substance & Material |

5. Label Structure

a) Module Label

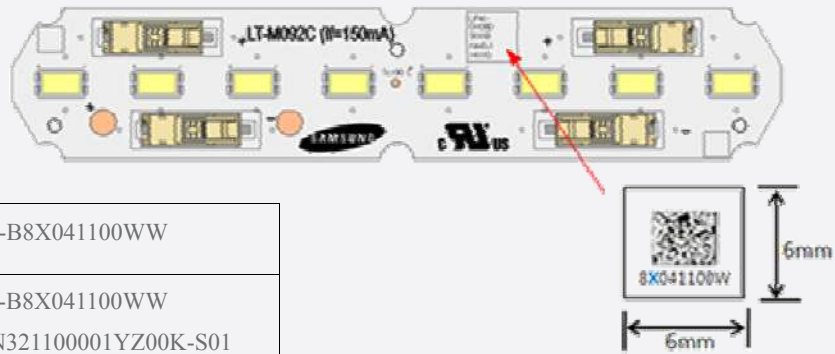

| | |
|-----------------------------|--|
| Model CODE | SI-B8X041100WW |
| QR CODE Information | SI-B8X041100WW _N321100001YZ00K-S01 |
| Printed CODE Information | 8X041100W |

The lot number is composed of the following characters:

A. Barcode type : 2-dimensional data matrix code

B. Information of Barcode

① Example : SI-B8X041100WW_N321100001YZ00K-S01

↑ ↑ ↑ ↑ ↑ ↑ ↑ ↑
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

② 34 digits: Model code (14) + Space (1) + SMT date (4) + SMT line No (1) + Serial No.(5)
+ Color temperature (5) + LED maker (2) + GROUP No (2)

C. Number information

① Model code: SI-B8X041100WW

X: W (2700K), V (3000K), U (3500K), T (4000K), R (5000K)

② Space: Space

③ SMT date: K224 (2010-February-24th)

A (2000), B(2001) ······ J(2009), K(2010), L(2011), ······ (year)

1(January), 2(February), ······ 9(September), A(October), B(November), C(December) (month)

01, 02, ······ 31th (date)

④ SMT Line No. : 1 line

1~9, A(10), B(11), C(12), D(13), E(14), F(15)

⑤ Serial No: 00001

00001~99999: Setting "00001" every working day


⑥ Color temperature: YZ00K

YZ: 27, 30, 35, 40

⑦ LED Maker: -S (Samsung)

⑧ Group No: 01 (Binning group)

b) Box Label

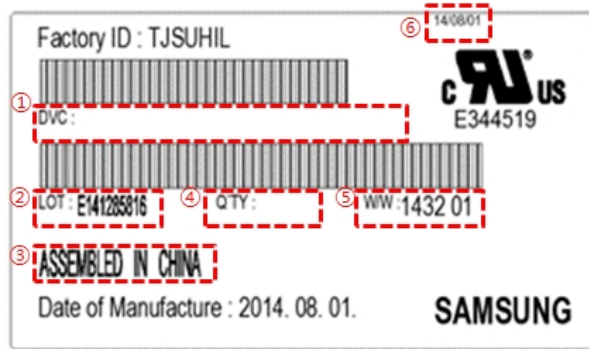


The lot number is composed of the following characters:

- ① : Product code
- ② : Lot ID
- ③ : Place of origin
- ④ : Quantity
- ⑤ : Describe production week
- ⑥ : Date of Issue

6. Packing Structure

a) Packing Process

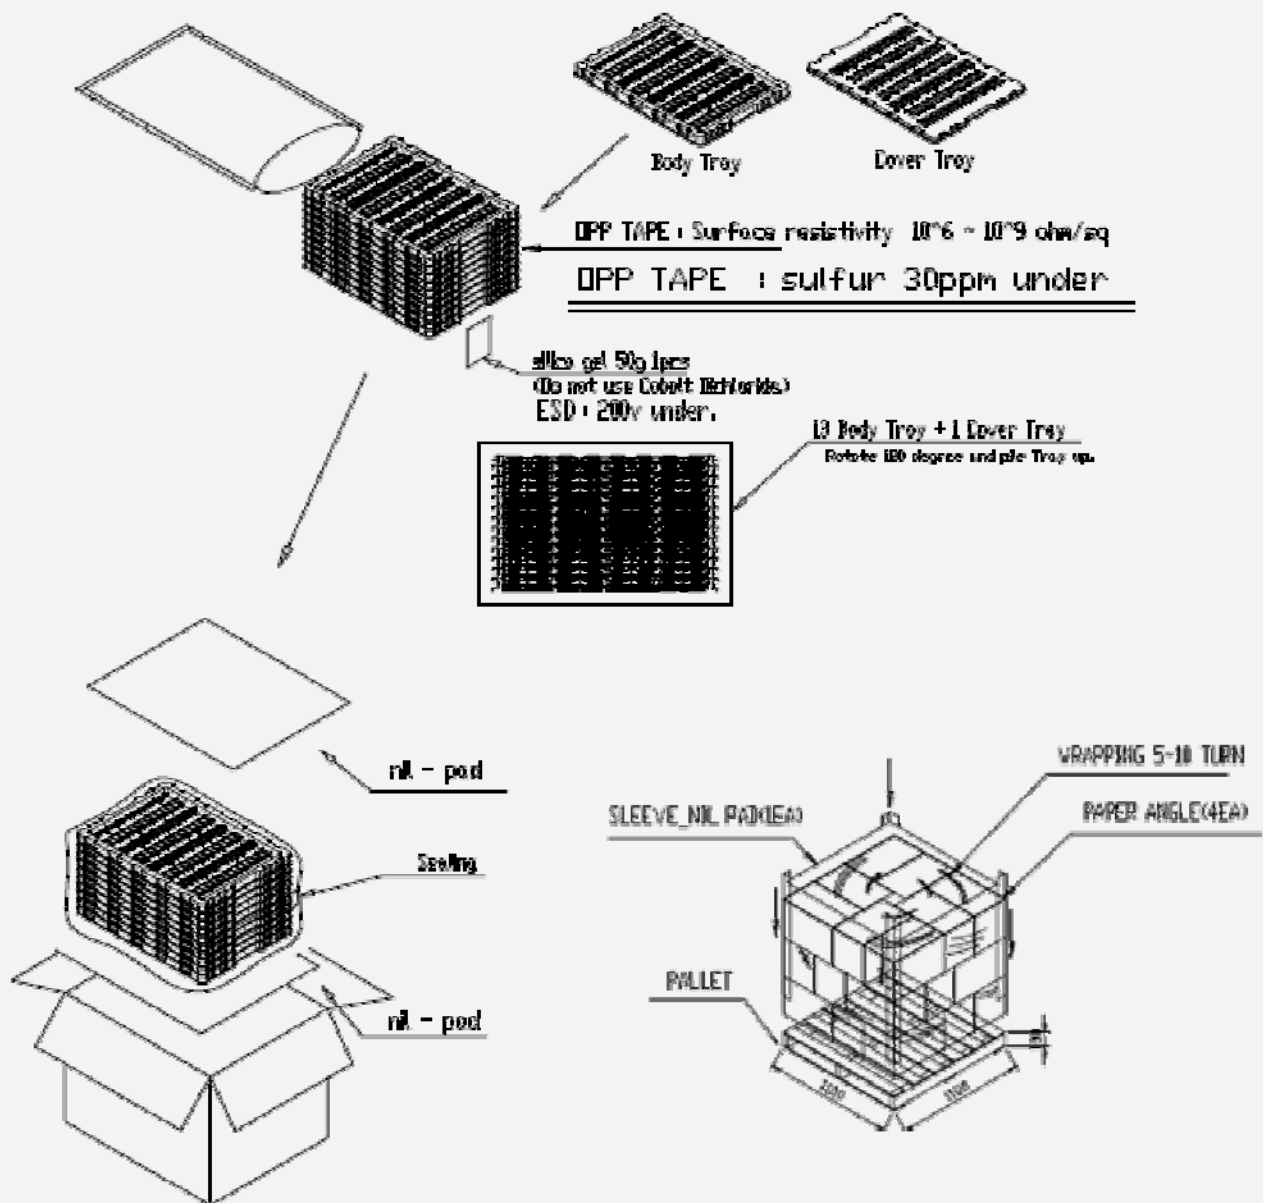

b) Packing

| Packing | Quantity (modules) | Dimension (mm) | | | |
|-----------|--------------------|----------------|-------|--------|-----------|
| | | Length | Width | Height | Tolerance |
| Outer Box | 1560 | 430 | 310 | 275 | - |
| Pallet | 37440(24boxes) | 1100 | 1100 | 130 | - |

7. Precautions in Handling & Use

A. The LED Lighting Modules for white light are devices which are materialized by combining white LEDs.

The color of white light can differ a little unusually to diffuser plate (sign-board panel).

Also when the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

B. Handling

To prevent the LED Lighting Modules from making any defectives, please handle the LED Lighting Modules with care as follows.

- (1) Don't drop the unit and don't give the unit any shocks.
- (2) Don't bend the PCB and don't touch the LED Resin.
- (3) Don't storage the Module in a dusty place or room.
- (4) Don't take the product apart.
- (5) Don't touch the LED and also PCB and other circuit parts of Module with your naked fingers or sharpness things.
- (6) Take care so that do not pull wire with hand in case of carries or moves LED Lighting Modules.

C. Cleaning

The LED Lighting Modules should not be used in any type of fluid such as water, oil, organic solvent, etc.

It is recommended that IPA (Isopropyl Alcohol) be used as a solvent for cleaning the LED Lighting Modules.

When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations. Do not clean the LED Lighting Modules by the ultrasonic.

Before cleaning, a pre-test should be done to confirm whether any damage to the LED Lighting Modules will occur.

D. Static Electricity

Static electricity or surge voltage damages the LED Lighting Modules. Please keep the working process anti-static electricity condition to prevent the Lighting from destroying, as following.

- (1) Anyone who handles the unit should be well grounded.(earth ring or anti-static glove)
- (2) Anyone who handles the unit should wear anti-electrostatic working clothes.
- (3) All kinds of device and instruments, such as working table, measuring instruments and assembly jigs in your production lines should be well grounded.

E. Storage

The LED Lighting Modules must be stored to insert a package of a moisture absorbent material(silica gel) in a box.

F. Others

If over voltage which exceeds the absolute maximum rating is applied to LED Lighting Modules.

It will cause damage Circuits(that LED is included) and result in destruction.

Do not directly look into lighted LED with naked eyes.

Please use this product within 5 months, which is kept in its original packaging unopened when stocked



Legal and additional information.

[About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit www.samsungled.com.

Copyright © 2014 Samsung Electronics Co., Ltd. All rights reserved.
Samsung is a registered trademark of Samsung Electronics Co., Ltd.
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.
95, Samsung 2-ro
Giheung-gu
Yongin-si, Gyeonggi-do, 446-711
KOREA

www.samsungled.com

