



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Datasheet

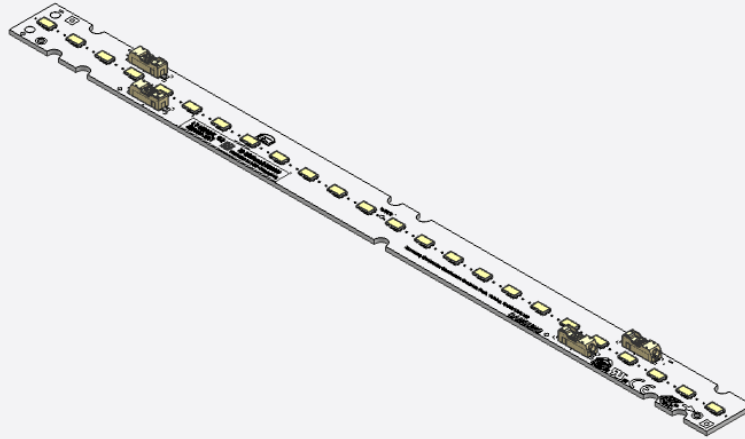

| MODEL NAME       | CCT   | SEC CODE       |
|------------------|-------|----------------|
| LT-M282C<br>GEN3 | 3000K | SI-B8V11428001 |
|                  | 3500K | SI-B8U11428001 |
|                  | 4000K | SI-B8T11428001 |
|                  | 5000K | SI-B8R11428001 |

| SAMSUNG  |                  |         |       | CUSTOMER |
|----------|------------------|---------|-------|----------|
| DEVELOP. | PRODUCT PLANNING | QA(DQA) | SALES |          |
|          |                  |         |       |          |

SAMSUNG ELECTRONICS CO.,LTD.


1 Samsung-ro , Giheung-gu ,  
Yongin-si , Gyeonggi-do 17113 , KOREA

**SAMSUNG**



## LED Module

# LT-M282C GEN3

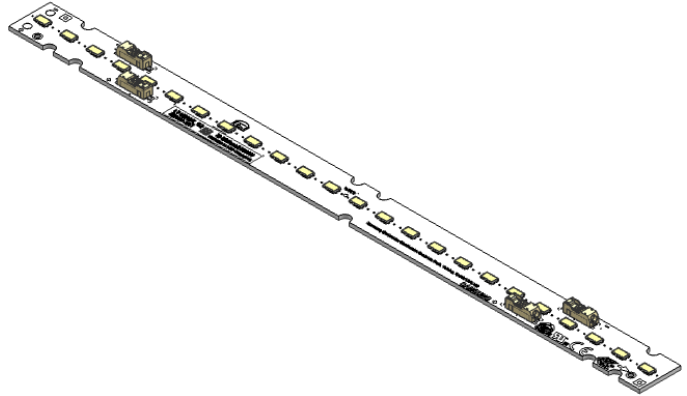

### Features & Benefits

- Easy connection with re-workable poke-in connector
- Fit better to replace conventional T5, T8 fixture with narrow width
- Full Certifications

### Applications

Indoor Lighting:

- Office / Retail / Living space
- Area Panels, Troffer and Linear Pendants
- Channel and Cove lighting

## Table of Contents

|          |                               |       |    |
|----------|-------------------------------|-------|----|
| 1.       | Product Code Information      | ----- | 3  |
| 2.       | Characteristics               | ----- | 4  |
| 3.       | Structure and Assembly        | ----- | 6  |
| 4.       | Certification and Declaration | ----- | 7  |
| 5.       | Label Structure               | ----- | 8  |
| 6.       | Packing Structure             | ----- | 10 |
| 7.       | Precautions in Handling & Use | ----- | 11 |
| APPENDIX |                               |       |    |
| 1.       | Applicable Solid Wires        | ----- | 12 |

## 1. Product Code Information

| Nominal CCT (K) | Product Code   |
|-----------------|----------------|
| 3000K           | SI-B8V11428001 |
| 3500K           | SI-B8U11428001 |
| 4000K           | SI-B8T11428001 |
| 5000K           | SI-B8R11428001 |

## 2. Characteristics (If=450mA, $t_p=50^\circ\text{C}$ )

### a) Basic Information

| Item  | Rating    | Unit             | Remark |
|---|-----------|------------------|--------|
| Rated Lifetime                                | >50,000   | hour             | L70B50 |
| Ingress Protection (IP)                       | no rating | -                |        |
| Ambient / Operating Temperature ( $t_{amb}$ ) | -20 ~ +50 | $^\circ\text{C}$ |        |
| Storage Temperature                           | -30 ~ +80 | $^\circ\text{C}$ |        |

### b) Electro-Optical Characteristics

| Item                        | Nom. CCT<br>(K) | Rating |      |      | Unit | Remark   |
|-----------------------------|-----------------|--------|------|------|------|--|
|                             |                 | Min    | Typ. | Max  |      |  |
| Luminous Flux ( $\Phi_v$ )  | 3000            | 1495   | 1660 | 1845 | lm   | $I_f = 450\text{mA}$<br>$t_p = 50^\circ\text{C}$ |
|                             | 3500            | 1510   | 1680 | 1865 |      |  |
|                             | 4000            | 1555   | 1730 | 1920 |      |  |
|                             | 5000            | 1555   | 1730 | 1920 |      |  |
| Luminous Efficacy           | 3000            | 134    | 149  | 165  | lm/W |  |
|                             | 3500            | 135    | 151  | 167  |      |  |
|                             | 4000            | 139    | 155  | 172  |      |  |
|                             | 5000            | 139    | 155  | 172  |      |  |
| CCT                         | 3000            | 2944   | 3032 | 3127 | K    |  |
|                             | 3500            | 3331   | 3443 | 3566 |      |  |
|                             | 4000            | 3815   | 3959 | 4114 |      |  |
|                             | 5000            | 4825   | 5010 | 5209 |      |  |
| Color Consistency (initial) | -               | -      | 3    | -    | -    | Mac Adam step                                    |
| Color Rendering Index (Ra)  | -               | 80     | 83   | -    | -    | Integrating Sphere                               |
| Operating Current ( $I_f$ ) | -               | -      | 450  | 540  | mA   | -  |
| Operating Voltage ( $V_f$ ) | -               | 23.3   | 24.8 | 27.3 | Vdc  | $I_f = 450\text{mA}$                             |
| Power Consumption           | -               | 10.5   | 11.2 | 12.3 | W    | $t_p = 50^\circ\text{C}$                         |

#### Notes:

- $t_p$ : temperature at which performance is specified; measured at "Tc point".
- Samsung maintains a measurement tolerance of : Luminous flux:  $\pm 7\%$ , CRI:  $\pm 3.0$ , Voltage:  $\pm 0.3\text{ V}$ , Power Consumption:  $\pm 0.3\text{W}$
- Measurement tolerance of the color coordinates is  $\pm 0.005$

### ※ Optional

| Item                        | Nom. CCT<br>(K) | Rating |      |      | Unit | Remark   |
|-----------------------------|-----------------|--------|------|------|------|--|
|                             |                 | Min    | Typ. | Max  |      |  |
| Luminous Flux ( $\Phi_v$ )  | 3000            | 1420   | 1580 | 1755 | lm   | $I_f = 425\text{mA}$<br>$t_p = 50^\circ\text{C}$ |
|                             | 3500            | 1445   | 1605 | 1785 |      |  |
|                             | 4000            | 1485   | 1650 | 1835 |      |  |
|                             | 5000            | 1485   | 1650 | 1835 |      |  |
| Luminous Efficacy           | 3000            | 135    | 151  | 167  | lm/W | $I_f = 425\text{mA}$<br>$t_p = 50^\circ\text{C}$ |
|                             | 3500            | 138    | 153  | 170  |      |  |
|                             | 4000            | 141    | 157  | 175  |      |  |
|                             | 5000            | 141    | 157  | 175  |      |  |
| Operating Current ( $I_f$ ) | -               | -      | 425  | -    | mA   | -  |
| Operating Voltage ( $V_f$ ) | -               | 23.2   | 24.7 | 27.1 | Vdc  | $I_f = 425\text{mA}$<br>$t_p = 50^\circ\text{C}$ |
| Power Consumption           | -               | 9.9    | 10.5 | 11.5 | W    | $t_p = 50^\circ\text{C}$                         |

#### Notes:

- 1)  $t_p$  : temperature at which performance is specified; measured at "Tc point".
- 2) Samsung maintains a measurement tolerance of : Luminous flux:  $\pm 7\%$ , CRI:  $\pm 3.0$ , Voltage:  $\pm 0.3\text{ V}$ , Power Consumption:  $\pm 0.3\text{W}$
- 3) Measurement tolerance of the color coordinates is  $\pm 0.005$

### c) Temperature Characteristics

| Item        | Nominal( $t_p$ )* | Life** | Max( $t_c$ )*** | Unit             |
|-------------|-------------------|--------|-----------------|------------------|
| Temperature | 50                | 80     | 90              | $^\circ\text{C}$ |


#### Notes:

- \* Temperature used to specify performance of the module ( $t_p$ ).
- \*\* Rated maximum performance temperature at which lifetime is specified.
- \*\*\* Rated maximum temperature, highest permissible temperature to avoid safety risk ( $t_c$ ).

All temperatures are measured at the designated "Tc point" as indicated on the module. (See page 5)

### d) Thermal Measurement


Performance temperatures are measured on "Tc point" as indicated on the module.





### 3. Structure and Assembly

#### a) Appearance & Dimension

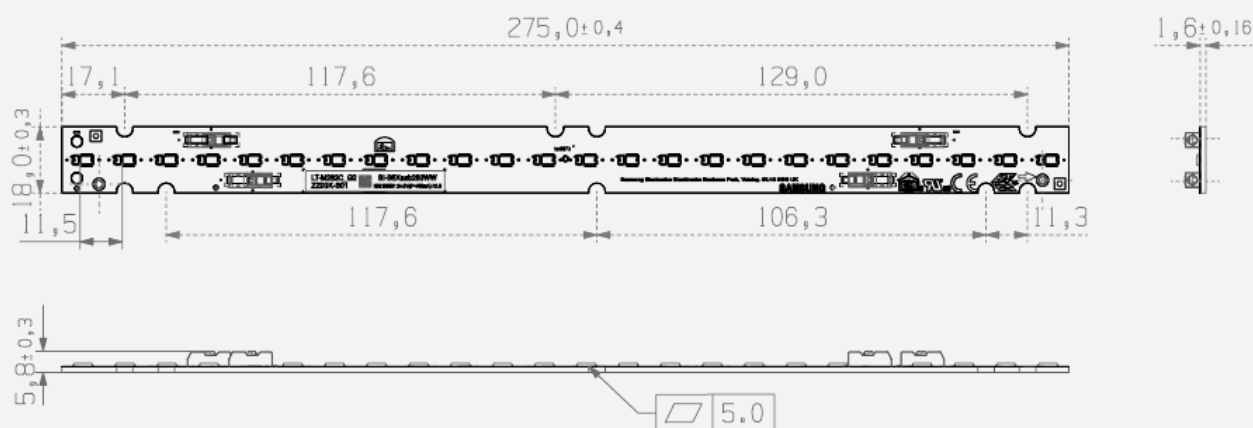

| Dimension     | Specification | Tolerance | Unit |
|---------------|---------------|-----------|------|
| Module Length | 275.0         | ±0.4      | mm   |
| Module Width  | 18.0          | ±0.3      | mm   |
| Module Height | 5.8           | ±0.3      | mm   |
| PCB Thickness | 1.6           | ±0.16     | mm   |
| Module Weight | 14.0          | ±1.0      | g    |

#### b) Structure

| Item      | Specification   |
|-----------|---|
| LED       | LM561B+ Middle Power LED  |
| PCB       | Material : copper, solder mask, epoxy                           |
| Connector | Reworkable poke-in connector type                               |
| Wire      | 24~18 AWG ; terminal strip length of 7.5~8.5 mm<br>(Appendix 1) |

#### c) Schematic Circuit


- 8S x 3P

## 4. Certification and Declaration

| Item                 | Compliant to                          | Remark                         |
|----------------------|---------------------------------------|--------------------------------|
| Test & Certification | CE                                    | IEC / EN 62031, IEC / EN 62471 |
|                      | UL / cUL                              | E344519                        |
|                      | Photo biological Safety (LM561B+ LED) | IEC / EN 62471                 |
| Declaration          | RoHS                                  | Hazardous Substance & Material |
|                      | REACH                                 | Hazardous Substance & Material |

## 5. Label Structure

### a) Module Label

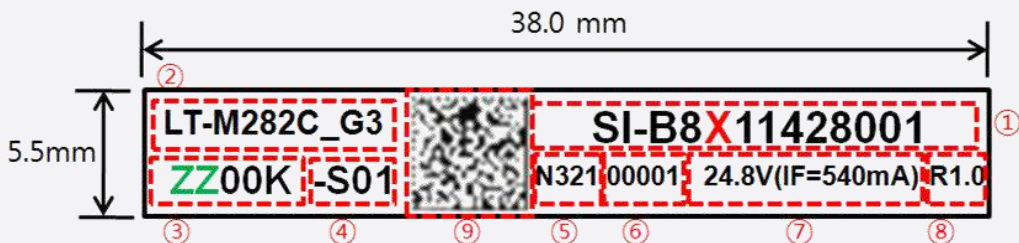

| Number | Item                                 | Remark   |
|--------|--------------------------------------|--|
| ①      | Model code                           | Refer to page 3<br>X = V, U, T, R              |
| ②      | Product name                         |  |
| ③      | Color temperature                    | ZZ = 30, 35, 40, 50                            |
| ④      | LED maker & Bin rank                 | -S (Samsung)<br>00~ZZ                          |
| ⑤      | SMT date                             | N321 (2013-March-21th)                         |
| ⑥      | Serial No.                           | 00001~99999; Setting "00001" every working day |
| ⑦      | Operating Current Max. & VoltageTyp. |  |
| ⑧      | Product Revision                     |  |
| ⑨      | QR Code                              | SI-B8X11428001_N321100001ZZ00K-S01             |




## b) TRAY &amp; MBB bag LABEL



| Number | Item               | Remark           |
|--------|--------------------|------------------|
| ①      | Model Code         | Refer to page 3  |
| ②      | LOT ID             |                  |
| ③      | Quantity           | Refer to page 10 |
| ④      | Date of production |                  |
| ⑤      | Date of Issue      |                  |

## C) Box Label

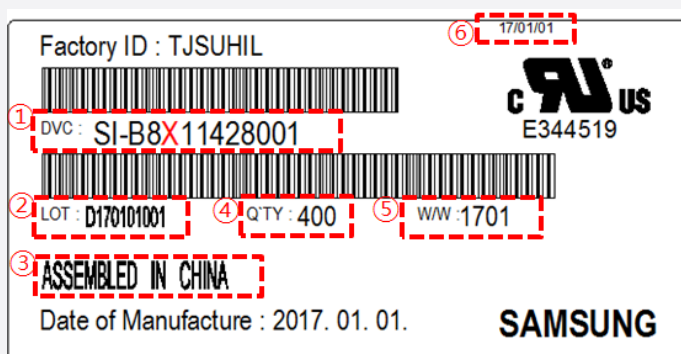

| Number | Item                     | Remark           |
|--------|--------------------------|------------------|
| ①      | Model Code               | Refer to page 3  |
| ②      | LOT ID                   |                  |
| ③      | Place of origin          |                  |
| ④      | Quantity                 | Refer to page 10 |
| ⑤      | Describe production week |                  |
| ⑥      | Date of Issue            |                  |

## 6. Packing Structure

| Product          | Packing   | Quantity (modules) | Dimension (mm) |       |        |
|------------------|-----------|--------------------|----------------|-------|--------|
|                  |           |                    | Length         | Width | Height |
| LT-M282C<br>GEN3 | Tray      | 40 ea              | 380            | 330   | 24     |
|                  | Outer Box | 400 ea             | 385            | 335   | 225    |
|                  | Pallet    | 12800 ea           | 1100           | 1100  | 130    |

## 7. Precautions in Handling & Use

A. The LED Lighting Modules for white light are devices which are materialized by combining white LEDs.

The color of white light can differ a little unusually to diffuser plate(sign-board panel).

Also when the LEDs are illuminating, operating current should be decided after considering the ambient maximum temperature.

B. Handling

To prevent the LED Lighting Modules from making any defectives, please handle the LED Lighting Modules with care as follows.

- (1) Don't drop the unit and don't give the unit any shocks.
- (2) Don't bend the PCB and don't touch the LED Resin.
- (3) Don't storage the Module in a dusty place or room.
- (4) Don't take the product apart.
- (5) Don't touch the LED and also PCB and other circuit parts of Module with your naked fingers or sharpness things.
- (6) Take care so that do not pull wire with hand in case of carries or moves LED Lighting Modules.

C. Cleaning

The LED Lighting Modules should not be used in any type of fluid such as water, oil, organic solvent, etc.

It is recommended that IPA (Isopropyl Alcohol) be used as a solvent for cleaning the LED Lighting Modules.

When using other solvents, it should be confirmed beforehand whether the solvents will dissolve the package and the resin or not. Freon solvents should not be used to clean the LEDs because of worldwide regulations. Do not clean the LED Lighting Modules by the ultrasonic.

Before cleaning, a pre-test should be done to confirm whether any damage to the LED Lighting Modules will occur.

D. Static Electricity

Static electricity or surge voltage damages the LED Lighting Modules. Please keep the working process anti-static electricity condition to prevent the Lighting from destroying, as following.

- (1) Anyone who handles the unit should be well grounded.(earth ring or anti-static glove)
- (2) Anyone who handles the unit should wear anti-electrostatic working clothes.
- (3) All kinds of device and instruments, such as working table, measuring instruments and assembly jigs in your production lines should be well grounded.

E. Storage

The LED Lighting Modules must be stored to insert a package of a moisture absorbent material(silica gel) in a box.

F. Others

If over voltage which exceeds the absolute maximum rating is applied to LED Lighting Modules.

It will cause damage Circuits(that LED is included) and result in destruction.

Do not directly look into lighted LED with naked eyes.

Please use this product within 5 months, which is kept in its original packaging unopened when Stocked

# Appendix

## 1. Applicable Solid Wires

a) Applicable solid wires only



| Wire Range<br>AWG NO. | Number of Conductors /<br>Diameter of a conductors<br>(NO. / mm) | Insulation Diameter<br>(mm) | Conductor Type |
|-----------------------|--|-----------------------------|----------------|
| 24                    | 1 / 0.51   | 1.35                        | Solid          |
| 22                    | 1 / 0.64   | 1.48                        |                |
| 20                    | 1 / 0.81   | 1.65                        |                |
| 18                    | 1 / 1.02   | 1.86                        |                |

※ outside insulation diameter  $\Phi$ 2.1mm Max.

b) Wire strip length



[ Conductor : Bear Copper ]

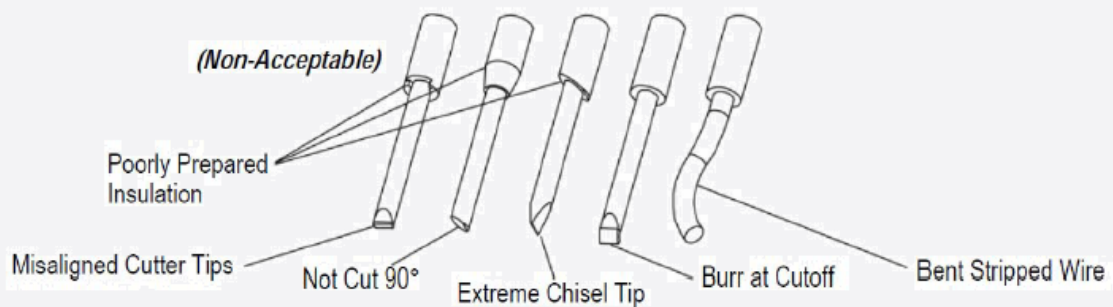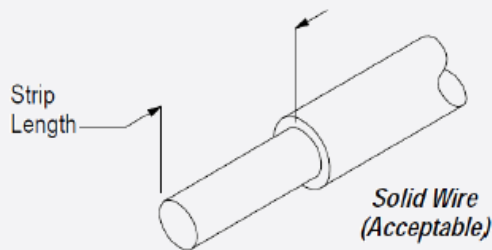

# Legal and additional information.

## [About Samsung Electronics Co., Ltd.](#)

Samsung Electronics Co., Ltd. is a global leader in technology, opening new possibilities for people everywhere. Through relentless innovation and discovery, we are transforming the worlds of TVs, smartphones, tablets, PCs, cameras, home appliances, printers, LTE systems, medical devices, semiconductors and LED solutions. We employ 286,000 people across 80 countries with annual sales of US\$216.7 billion. To discover more, please visit [www.samsungled.com](http://www.samsungled.com).

Copyright © 2017 Samsung Electronics Co., Ltd. All rights reserved.  
Samsung is a registered trademark of Samsung Electronics Co., Ltd.  
Specifications and designs are subject to change without notice. Non-metric weights and measurements are approximate. All data were deemed correct at time of creation. Samsung is not liable for errors or omissions. All brand, product, service names and logos are trademarks and/or registered trademarks of their respective owners and are hereby recognized and acknowledged.

Samsung Electronics Co., Ltd.  
95, Samsung 2-ro  
Giheung-gu  
Yongin-si, Gyeonggi-do, 446-711  
KOREA

[www.samsungled.com](http://www.samsungled.com)

**SAMSUNG**