



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Description

The Si2167-B22 integrates DVB-T, DVB-C, DVB-S, DVB-S2 (AMC-compliant), and DSS digital demodulators into a single CMOS chip for terrestrial, cable, and satellite TV standards. Leveraging Silicon Labs' proven digital demodulation architecture, the Si2167-B22 achieves superior reception performance for each media while minimizing front-end design complexity and cost. Connecting the Si2167-B22 to a terrestrial and cable hybrid TV tuner, such as Silicon Labs' Si217x, results in a high performance and cost optimized TV front-end solution.

DVB-T and DVB-C demodulators are enhanced versions of proven and broadly used Si2169/68/67-A Silicon Labs devices. Furthermore, ITU J.83 Annex B is also supported for US and South American cable networks. The IF input supports standard IF (36 MHz) or low-IF.

For DVB-T and DVB-S/DSS, an innovative and advanced FEC decoding scheme is implemented resulting in higher performance.

The satellite demodulation functionality allows demodulating widely deployed DVB-S, DIRECTV™ (DSS) legacy standards, and DVB-S2 satellite broadcast. A zero-IF interface allows for a seamless connection to market proven satellite silicon tuners. Constant Coding Modulation (CCM), QPSK/8PSK demodulation schemes and broadcast profile are the main specifications of the DVB-S2 demodulator. Silicon Labs' innovative LDPC and BCH decoding architecture delivers best-in-class reception while exhibiting low power dissipation.

The Si2167-B22 offers an on-chip blind scanning algorithm for DVB-S/S2 and DVB-C standards (as well as blind lock function). It also integrates DiSEqC™ 2.0 LNB interface for satellite dish control.


The Si2167-B22 programmable Transport Stream interface provides a flexible range of output modes and is fully compatible with all MPEG decoders or conditional access modules to support any customer application. Si2167-B22 is fully API compatible with Si2164/69/68/66.

Features

- DVB-T (ETSI EN 300 744)
 - COFDM demodulator and enhanced FEC decoder
 - Supports all C.R., G.I., LP, and HP streams
 - NorDig Test Spec 2.2.2, D-Book 7 V3 compliant
- DVB-C (ETSI EN 300 429) / ITU J.83 Annex A/B/C
 - QAM demodulator and FEC decoder
 - 1 to 7.2 MSymbol/s
 - C-Book compliant
- DVB-S2 (ETSI EN 302 307 & TR102-376)
 - QPSK/8PSK demodulator and FEC decoder
 - Broadcast profile: CCM, 64800 bits frame, single TS
 - 1 to 45 MSymbol/s
 - DIRECTV™ AMC compatible
- DVB-S (ETSI EN 300 421)
 - QPSK demodulator and enhanced FEC decoder
 - 1 to 45 MSymbol/s
- DIRECTV™ DSS supported
- DiSEqC™ 2.0 interface and Unicable support
- I²C serial bus interfaces (master and host)
- Three ADCs with independent IF and ZIF (differential) inputs for terrestrial/cable and satellite
- GPIOs and multi-purpose ports for independent AGCs (up to 4) to control satellite and T/C tuners
- Firmware control for upgradeability
- Flexible TS interface with serial or parallel single output
- Fast lock times for all media
- Only two power supplies: 1.2 and 3.3 V
- Pin-to-pin and API compatibility with Si2164/69/68/66
- 7x7 mm, QFN-48 pin package, Pb-free/RoHS compliant

Applications

- Full-NIM
- iDTV (integrated Digital TV)
- Digital terrestrial, cable, and satellite STB
- PC-TV accessories
- PVR, DVD, and Blue Ray disc recorders

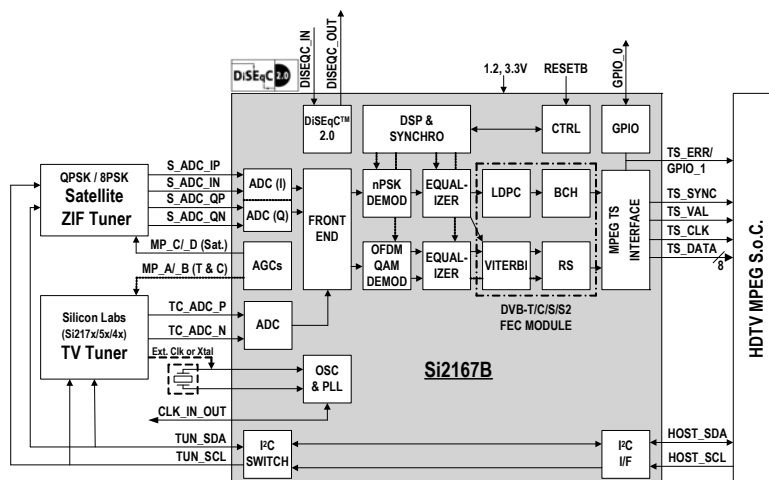


Selected Electrical Specifications

(T_A = -10 to 75 °C)

Parameter	Test Condition	Min	Typ	Max	Unit
General					
Input clock reference		4	—	30	MHz
Supported XTAL frequency		16	—	30	MHz
Total power consumption	DVB-T ¹ /DVB-C ²	—	190/180	—	mW
	DVB-S ³	—	230	—	mW
	DVB-S ² ⁴	—	465	—	mW
Thermal resistance, θ _{JA}	2 layer PCB	—	32	—	°C/W
	4 layer PCB	—	23	—	°C/W
Power Supplies					
V _{DD_VCORE}		1.14	1.20	1.30	V
V _{DD_VANA}		3.00	3.30	3.60	V
V _{DD_VIO}		3.00	3.30	3.60	V
Notes:					
1. Test conditions: 8 MHz, 8K FFT, 64 QAM, parallel TS output.					
2. Test conditions: 6.9 Mbaud, 256 QAM, parallel TS output.					
3. Test conditions: 30 Mbaud, CR = 7/8, parallel TS (at QEF: BER = 2 · 10 ⁻⁴).					
4. Test conditions: 32 Mbaud, 3/5 Code Rate, 8PSK, pilots On, parallel TS, C/N at picture failure.					

Pin Assignments

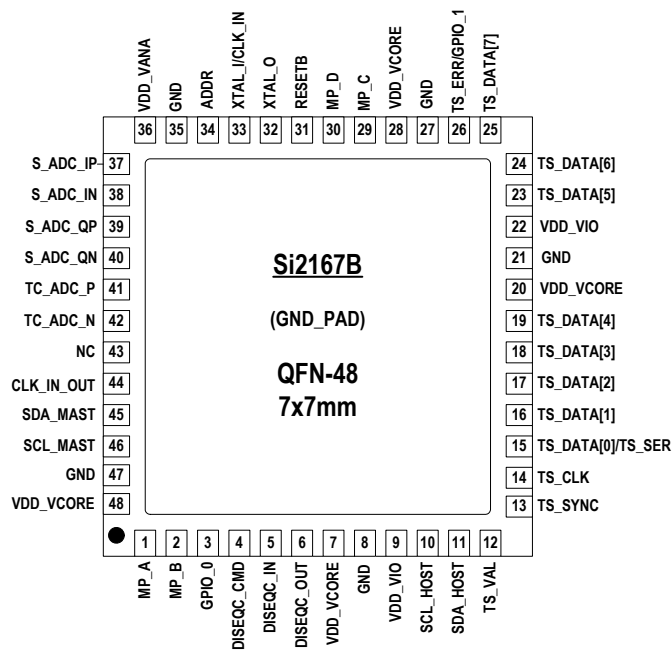

Selection Guide

Part Number	Description
Si2167-B22-GM	Multimedia Digital TV Demodulator for DVB-T/C/S/S2, 7x7 mm QFN-48.