



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





SAMSUNG
ARTIKTM Modules


5

530 Product Brief



Top View ARTIK 530 Module

The Samsung ARTIK™ 530 Module is a highly-integrated System-in-Module that combines a quad core ARM® Cortex®-A9 processor packaged DRAM and Flash memories; a Secure Element; and a wide range of wireless communication options such as 802.11a/b/g/n, Bluetooth® 4.2 (BLE+Classic), and 802.15.4 for ZigBee®/Thread; all into one 49x36mm footprint. The many standard digital control interfaces support external sensors and higher-performance peripherals to expand the module's capabilities. With the combination of 802.11, Bluetooth and ZigBee or Thread, the ARTIK 530 Module is the perfect choice for home automation and home hub devices, while also supporting a rich UI/UX capability for camera and display requirements. The inclusion of a hardware-based Secure Element provides end-to-end security.

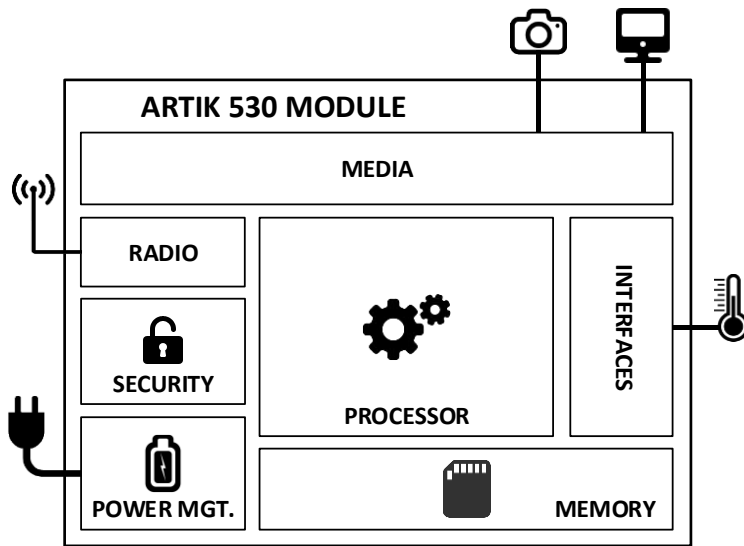


ARTIK 530 Module Block Diagram

Processor	
CPU	Quad core ARM® Cortex® A9@1.2GHz
GPU	3D Graphics accelerator
Media	
Camera I/F	4-lane MIPI CSI up to 5M (1920x1080@30fps)
Display	4-lane MIPI DSI and HDMI1.4a (1920x1080p@60fps) or LVDS (1280x720p@60fps)
Audio	Two I²S audio input/output
Memory	
DRAM	512MB DDR3
FLASH	4GB eMMC v4.5
Security	
Secure Element	Secure point to point authentication and data transfer
Radio	
WLAN	IEEE 802.11a/b/g/n, dual band SISO
Bluetooth®	4.2 (BLE+Classic)
802.15.4	ZigBee®/Thread
Power Management	
PMIC	Provides all power of the ARTIK 530 Module using on board bucks and LDO's
Interfaces	
Ethernet	10/100/1000Base-T MAC (External PHY required)
Analog and Digital I/O	GPIO, UART, I²C, SPI, USB Host, USB OTG, HSIC, ADC, PWM, I²S, JTAG


SAMSUNG ELECTRONICS RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind. This document and all information discussed herein remain the sole and exclusive property of Samsung Electronics. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or other-wise. Samsung products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defense application, or any governmental procurement to which special terms or provisions may apply. For updates or additional information about Samsung products, contact your nearest Samsung office. All brand names, trademarks and registered trademarks belong to their respective owners.

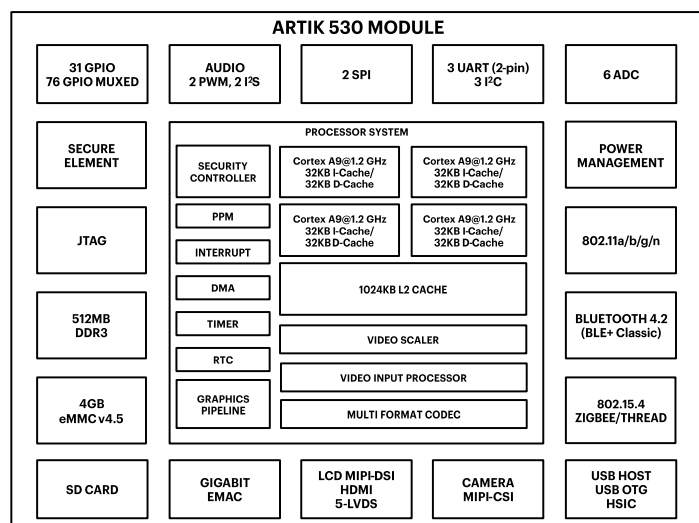

ARTIK 530 Module Sub System

Processors	Quad core ARM® Cortex® A9@1.2GHz 32KB I-Cache and 32KB D-Cache per core Shared 1MB L2 Cache Vector Floating Point Coprocessor GPU Coprocessor
Display/Camera	4-lane MIPI DSI up to FHD and 5-channel LVDS or HDMI1.4a 4-lane MIPI CSI up to 5M
DMC	DDR3@800MHz
External Peripherals	Two SPI, three UART (2-pin), three I²C, two I²S, two PWM, six ADC, 31 GPIO (Dedicated), 76 GPIO (Multiplexed)
Multi Media	Multi Format Codec
High Speed Interfaces	1G MAC, USB Host, USB OTG, USB HSIC, SD/MMC
Security	Device authentication, secure boot and secure JTAG

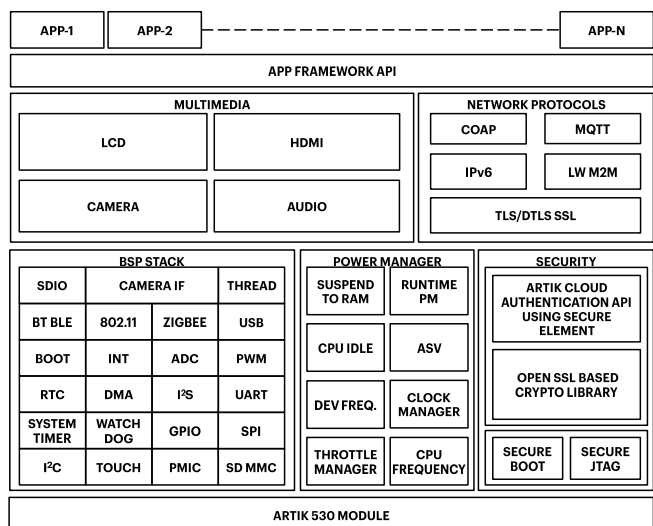

ARTIK 530 Module Software Stack

ARTIK 530 MODULE SECURITY FEATURES

Samsung considers world class security one of the most important requirements when adding IoT nodes into the cloud. As such Samsung builds its ARTIK IoT platform with security in mind. To assure a secure environment for all IoT nodes, the ARTIK platform has dedicated security hardware and software components in place.

Every ARTIK 530 Module has the ability to authenticate its boot image using a secure hash and to execute a secure boot once the boot image has been authenticated. Secure communication and key management is facilitated by the Secure Element that is built into the ARTIK 530 Module.

The ARTIK 530 Module software stack facilitates total security starting from authenticated connection of the IoT Module into the cloud to secure communication and remote software updates.

Samsung's commitment to security gives developers the ability to create secure user experiences using the ARTIK 530 Module.

ARTIK 530 MODULE ORDERING INFORMATION

For ordering, please contact a sales representative in your area or email sales@artik.io.