



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**DATA SHEET**

# SKY65111-348LF: ISM 600–1100 MHz Band 2 Watt InGaP HBT Power Amplifier

**Features**

- Optimized for 800–1100 MHz operation
- Output power greater than 33 dBm @915 MHz
- 3.5 V nominal operating voltage
- Integrated analog power control voltage,  $V_{APC} = 0.1-2.8$  V
- High PAE at maximum output power
- Ultrasmall, thermally enhanced micro lead frame package.
- Low current in standby mode of  $< 10 \mu\text{A}$
- Available on tape and reel
- Available lead (Pb)-free and RoHS-compliant


**Description**

The SKY65111-348LF is a high-performance 3-stage, high-power amplifier IC designed for use in 600–1100 MHz ISM band applications such as automatic meter readers and RFID. It has an integrated analog power control voltage for achieving the desired output power levels. The IC is manufactured on an advanced InGaP HBT process. The SKY65111-348LF is packaged in a thermally enhanced, ultrasmall, micro lead frame package.




**NEW** Skyworks offers lead (Pb)-free, RoHS (Restriction of Hazardous Substances)-compliant packaging.

**Block Diagram**

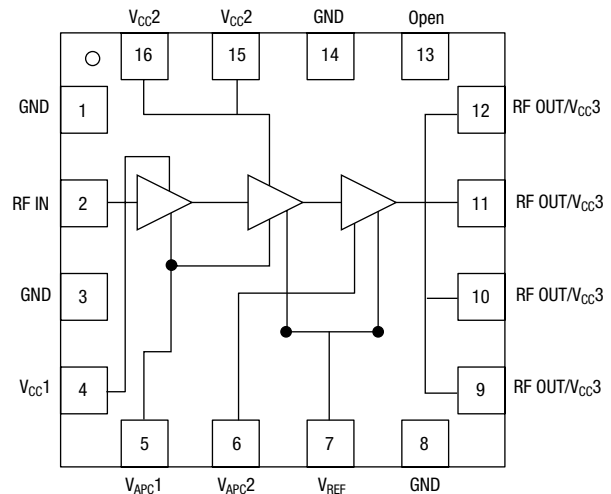

**Package Dimensions**

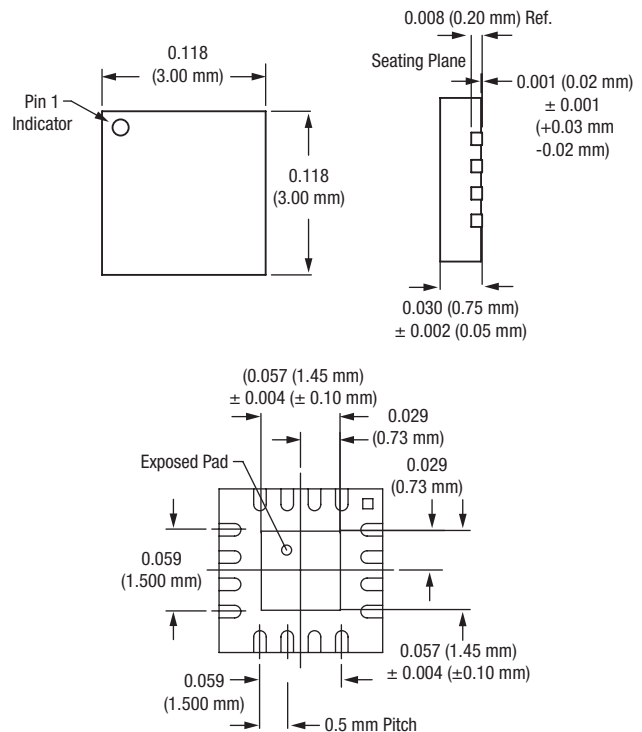

 **Innovation to Go™**  
Now available for purchase online.

### Pin Assignments

Pin	Symbol	Description
1, 3, 8, 14	GND	Connect this pin to the printed circuit board common via lowest possible impedance.
2	RF IN	RF input port.
4	V <sub>CC1</sub>	DC power supply input to the first gain stage.
5	V <sub>APC1</sub>	Power control voltage input to the first and second gain stages.
6	V <sub>APC2</sub>	Power control voltage input to the third gain stage.
7	V <sub>REF</sub>	Control voltage input to bias control circuit.
9, 10, 11, 12	RF OUT/ V <sub>CC3</sub>	RF output ports and DC supply voltage inputs to third gain stage.
13	OPEN	No connection. Do not connect this pin to ground.
15, 16	V <sub>CC2</sub>	DC power supply input to the second gain stage.

### Absolute Maximum Ratings

Characteristic	Value
Supply voltage (V <sub>CC</sub> & V <sub>REF</sub> )	5.5 V
Power control voltage (V <sub>APC1</sub> & V <sub>APC2</sub> )	3.0 V
RF input power	10 dBm
Operating temperature	-40 °C to +85 °C
Storage temperature	-65 °C to +85 °C

Performance is guaranteed only under the conditions listed in the specifications table and is not guaranteed under the full range(s) described by the Absolute Maximum specifications. Exceeding any of the absolute maximum/minimum specifications may result in permanent damage to the device and will void the warranty. Each absolute maximum rating listed is an individual parameter. Basing and driving the amplifier with all absolute maximum ratings listed simultaneously may result in permanent damage to the device.

**CAUTION:** *Although this device is designed to be as robust as possible, ESD (Electrostatic Discharge) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions must be employed at all times.*

### General DC Electrical Specifications

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Supply voltage	V <sub>CC</sub>		2.5	3.5	5	V
Power control voltage	V <sub>APC</sub>		0	2.7	2.8	V
Power control range				45		dB
Power control current	I <sub>VAPC</sub>				5	mA
Leakage current		P <sub>IN</sub> < -30 dBm, V <sub>APC1, 2</sub> = 0.1 V			10	µA
Thermal resistance	R <sub>TH</sub>			50		° C/W

### Guaranteed Performance

**V<sub>CC</sub> = 3.5 V, V<sub>REF</sub> = 3.5 V, V<sub>APC</sub> = 2.7 V, T<sub>A</sub> = 25 °C**

Parameter	Symbol	Condition	Specification	Unit
Critical gain	I <sub>S21</sub>	902–928 MHz, -30 dBm input	36 min.	dB
Saturated power	P <sub>SAT</sub>	915 MHz	30 min.	dBm

Guaranteed performance is as measured in the application's PC board as defined in this data sheet.

**General RF Transmit Electrical Specifications****Conditions:  $V_{CC} = 3.5\text{ V}$ ,  $V_{REF} = 3.5\text{ V}$ ,  $V_{APC} = 2.7\text{ V}$ ,  $P_{IN} = -30\text{ dBm}$ ,  $T_A = 25\text{ }^\circ\text{C}$** 


Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Frequency range	F		902		928	MHz
Gain	$ S_{21} $	Small signal		40		dB
Gain variation over frequency	$ \Delta S_{21} $	Small signal		0.3		dB
Input return loss	$ S_{11} $	Small signal		-12		dB
Output return loss	$ S_{22} $	Small signal		-15		dB
Quiescent current	$I_{CQ}$	(No RF signal)		0.25		A
Output $P_1$ dB	$P_1$ dB	CW		29.5		dBm
Current consumption	$I_{CC}$	Output $P_1$ dB		0.7		A
Saturated power @ 915 MHz	$P_{SAT}$	$V_{CC} = 3.5\text{ V}$ , $V_{REF} = 3.5\text{ V}$ , $V_{APC} = 2.7\text{ V}$		33		dBm
Power added efficiency	PAE	$P_{SAT}$		50		%
Second harmonic	$F_2$	Output $P_1$ dB		-28		dBm
Third harmonic	$F_3$	Output $P_1$ dB		-38		dBm
Ruggedness		Output VSWR = 8:1, All phase angles, $V_{CC} = 5\text{ V}$ , $P_{IN} = -5\text{ dBm}$ , $V_{APC} = 2.7\text{ V}$ $V_{REF} = 5\text{ V}$	No module damage or permanent performance degradation			
Stability		Output VSWR = 8:1, All phase angles, $V_{CC} = 5\text{ V}$ , $P_{IN} = -10\text{ dBm}$ , $V_{APC} = 2.7\text{ V}$ $V_{REF} = 5\text{ V}$		-36		dBm

**Conditions:  $V_{CC} = 3.5\text{ V}$ ,  $V_{REF} = 3.5\text{ V}$ ,  $V_{APC} = 2.7\text{ V}$ ,  $P_{IN} = -30\text{ dBm}$ ,  $T_A = 25\text{ }^\circ\text{C}$** 

Parameter	Symbol	Condition	Min.	Typ.	Max.	Unit
Frequency range	F		800		1100	MHz
Gain	$ S_{21} $	Small signal		39.5		dB
Gain variation over frequency	$ \Delta S_{21} $	Small signal		1.0		dB
Input return loss	$ S_{11} $	Small signal		-11		dB
Output return loss	$ S_{22} $	Small signal		-8		dB
Output $P_1$ dB	$P_1$ dB	CW		27		dBm
Quiescent current	$I_{CQ}$	(No RF signal)		0.25		A
Current consumption	$I_{CC}$	Output $P_1$ dB		0.7		A
Second harmonic	$F_2$	Output $P_1$ dB		-17		dBm
Third harmonic	$F_3$	Output $P_1$ dB		-35		dBm
Ruggedness		Output VSWR = 8:1, All phase angles, $V_{CC} = 5\text{ V}$ , $P_{IN} = -5\text{ dBm}$ , $V_{APC} = 2.7\text{ V}$ $V_{REF} = 5\text{ V}$	No module damage or permanent performance degradation			
Stability		Output VSWR = 8:1, All phase angles, $V_{CC} = 5\text{ V}$ , $P_{IN} = -10\text{ dBm}$ , $V_{APC} = 2.7\text{ V}$ , $V_{REF} = 5\text{ V}$		36		dBm
Saturated power @ 800 MHz	$P_{SAT}$	$V_{CC} = 3.5\text{ V}$ , $V_{REF} = 3.5\text{ V}$ , $V_{APC} = 2.7\text{ V}$		32		dBm
Power added efficiency @ 800 MHz	PAE	$P_{SAT}$		45		%
Saturated power @ 1100 MHz	$P_{SAT}$	$V_{CC} = 3.5\text{ V}$ , $V_{REF} = 3.5\text{ V}$ , $V_{APC} = 2.7\text{ V}$		30		dBm
Power added efficiency @ 1100 MHz	PAE	$P_{SAT}$		40		%


Unless otherwise stated  $V_{REF} = V_{CC}$ .

**Typical Performance Data**

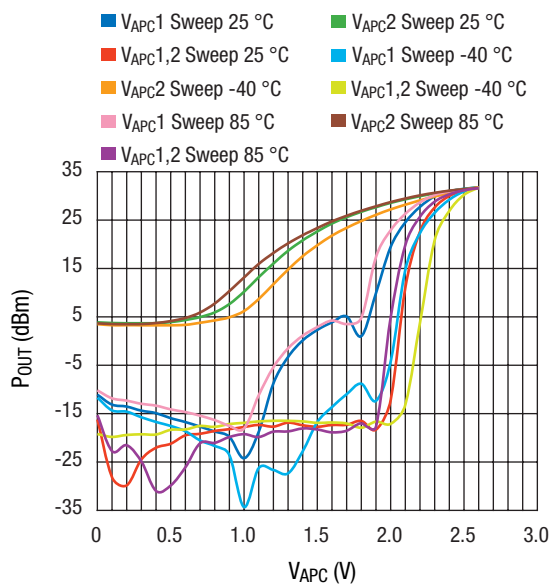


**P<sub>OUT</sub> vs. V<sub>APC</sub>**  
**915 MHz, P<sub>IN</sub> = -5 dBm**


V<sub>APC1</sub> varied from 0 V–2.6 V, V<sub>APC2</sub> held at 2.6 V.  
 V<sub>APC2</sub> varied from 0 V–2.6 V, V<sub>APC1</sub> held at 2.6 V.  
 V<sub>APC1</sub> and V<sub>APC2</sub> varied from 0 V–2.6 V together.

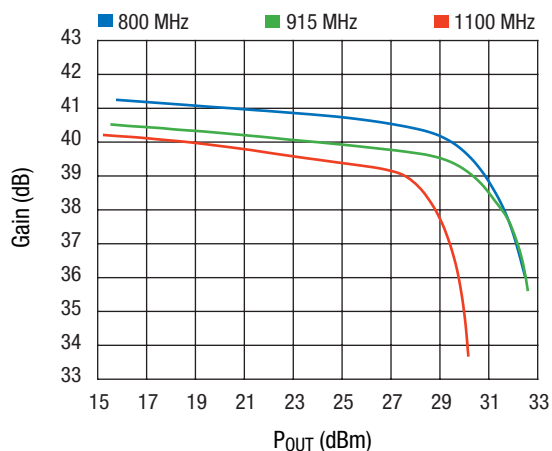


**Gain vs. P<sub>OUT</sub> and Frequency**  
**V<sub>CC</sub> = 3.5, T = 25 °C, V<sub>APC1,2</sub> = 2.7 V**

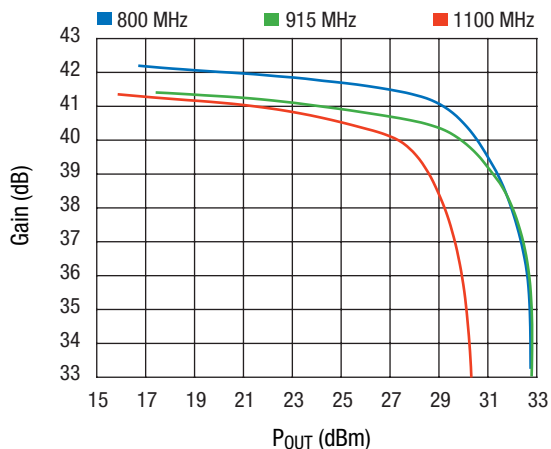


**Gain vs. P<sub>OUT</sub> and Frequency**  
**V<sub>CC</sub> = 3.5, T = 25 °C, V<sub>APC1,2</sub> = 2.8 V**

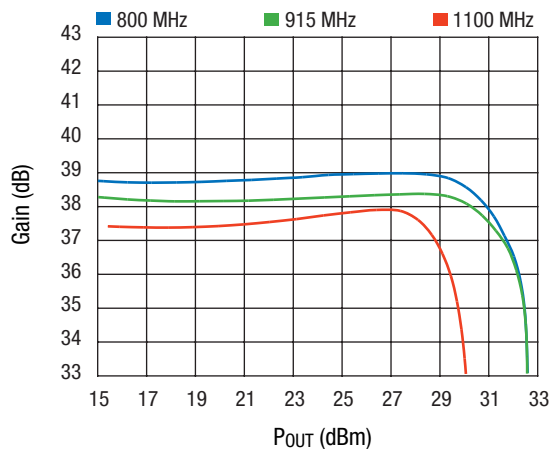


**Gain vs. P<sub>OUT</sub> and Frequency**  
**V<sub>CC</sub> = 3.5, T = 25 °C, V<sub>APC1,2</sub> = 2.6 V**

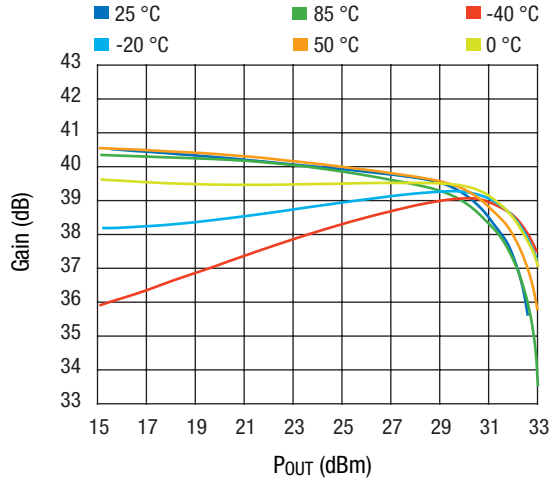


**Gain vs. P<sub>OUT</sub>, V<sub>CC</sub> = 3.5, V<sub>APC1,2</sub> = 2.7 V, 915 MHz**

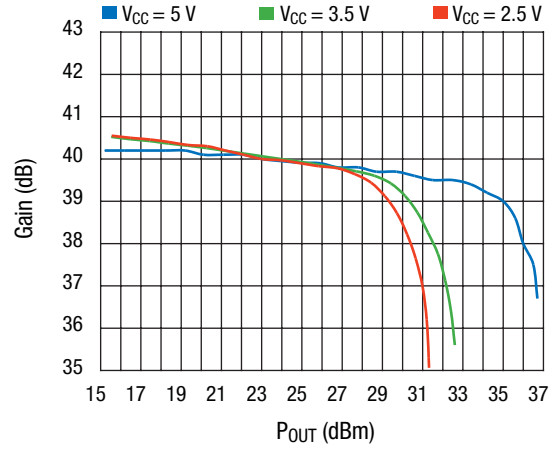


**Gain vs. P<sub>OUT</sub>, V<sub>APC1,2</sub> = 2.7 V, 915 MHz @ 25 °C**

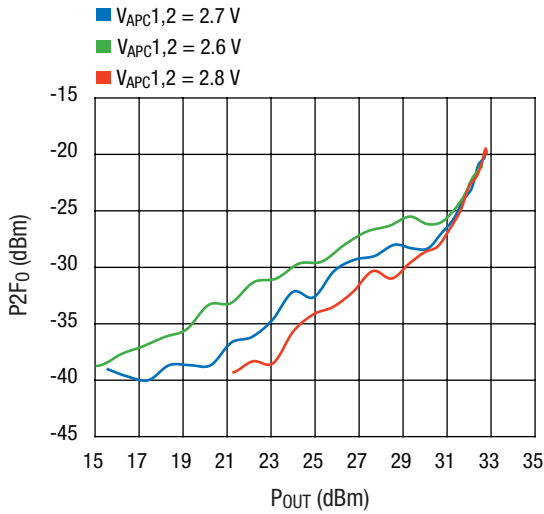


**2F<sub>0</sub> vs. P<sub>OUT</sub>, 915 MHz Fundamental, V<sub>CC</sub> = 3.5 V 25 °C**

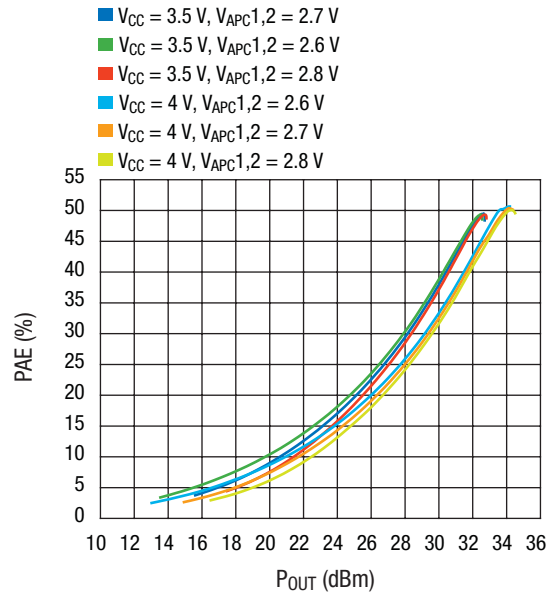


**% PAE vs. V<sub>APC1,2</sub> and V<sub>CC</sub> 915 MHz @ 25 °C**

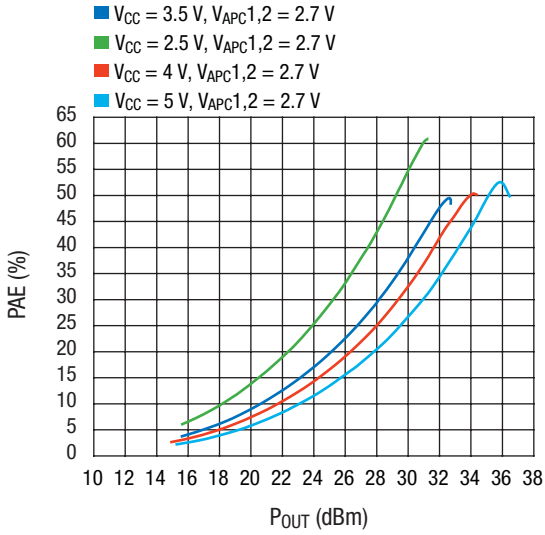


**% PAE vs. POUT and VCC,  
VAPC1,2 = 2.7, 915 MHz @ 25 °C**

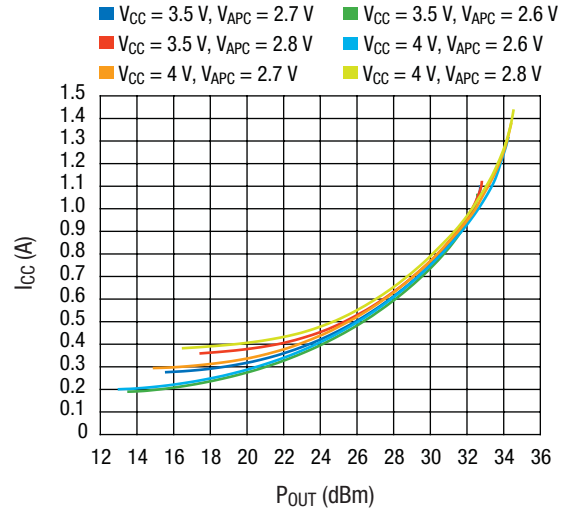


**ICC vs. POUT, VCC and VAPC1,2  
915 MHz, 25 °C**

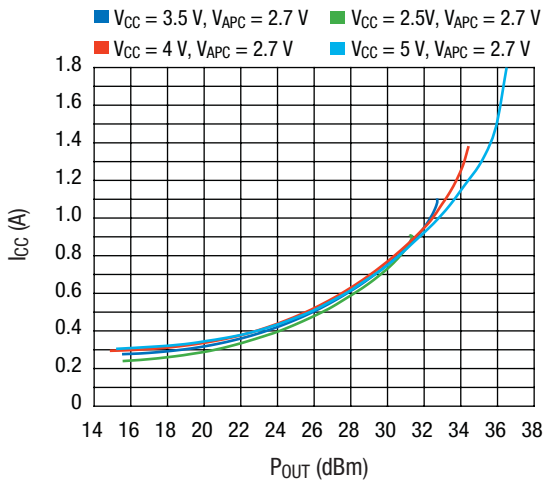


**ICC vs. POUT and VCC, VAPC1,2 = 2.7 V,  
915 MHz @ 25 °C**

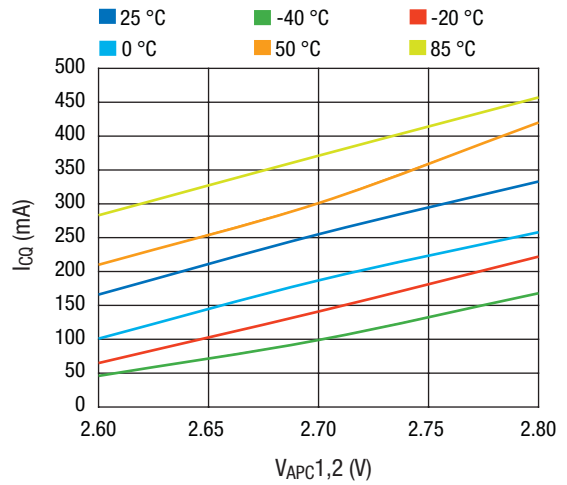


**ICQ vs VAPC1, 2, VCC = 3.5 V  
RF Off @ 25 °C**

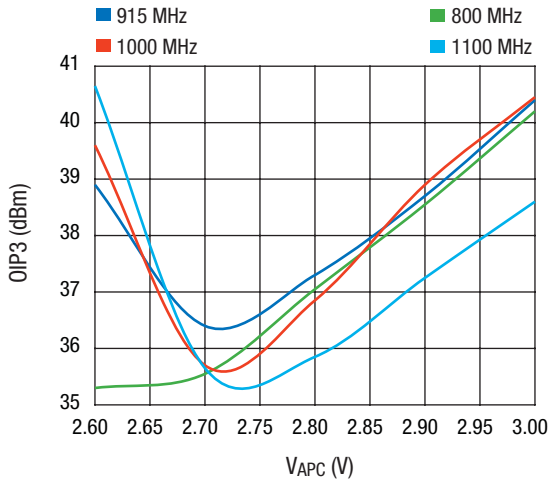


**OIP3 vs. V<sub>APC</sub>1,2, Tone Spacing 1 MHz**  
**V<sub>CC</sub> = 3.5 V P<sub>OUT</sub> = 20 dBm @ 25 °C**

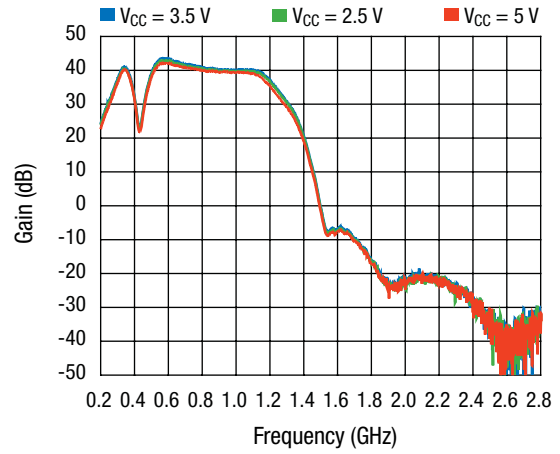

**Gain vs. Frequency, V<sub>APC</sub>1, 2 = 2.7 V**  
**P<sub>IN</sub> = -30 dBm, 25 °C**

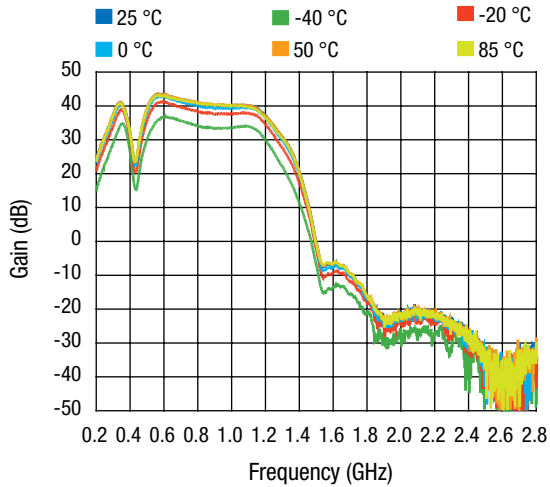


**Gain vs. Frequency, V<sub>CC</sub> = 3.5 V,**  
**P<sub>IN</sub> = -30 dBm, V<sub>APC</sub>1,2 = 2.7 V**

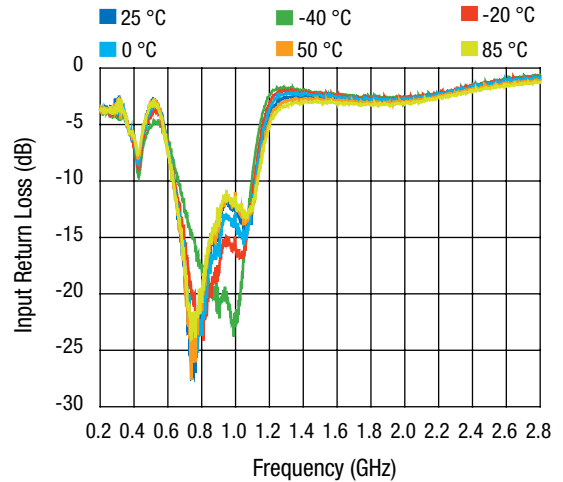


**Input Return Loss vs. Frequency**  
**V<sub>CC</sub> = 3.5 V, P<sub>IN</sub> = -30 dBm, V<sub>APC</sub>1,2 = 2.7 V**




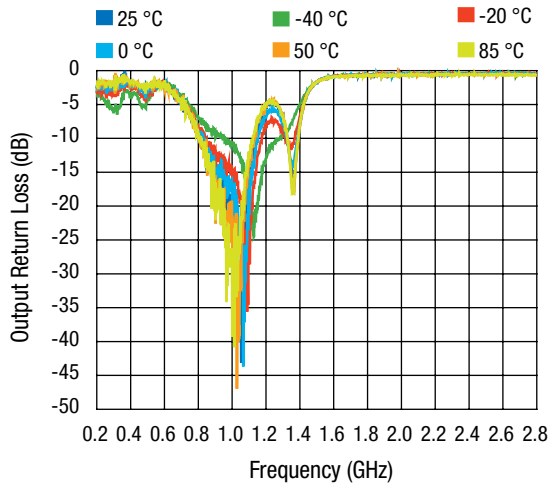


**Output Return Loss vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

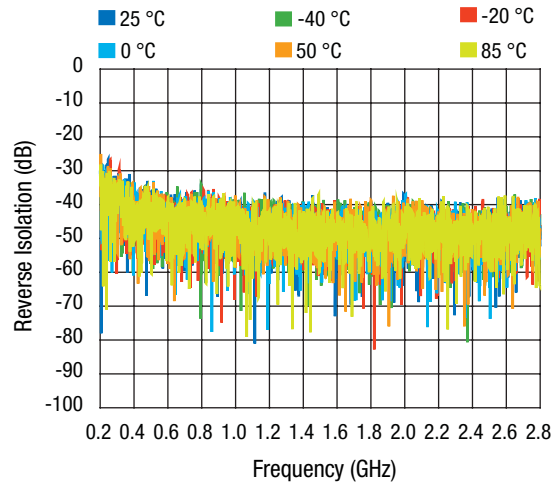


**Reverse Isolation vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

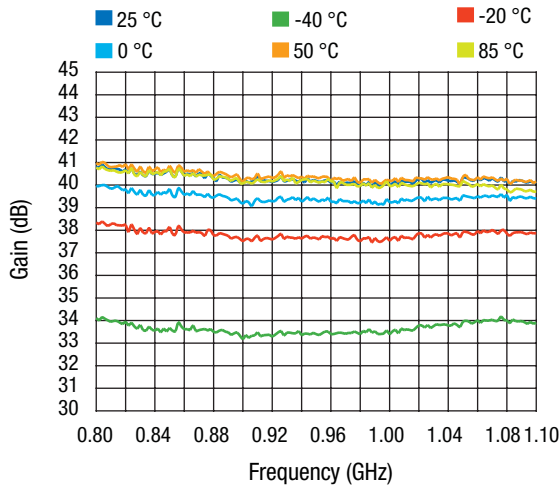


**Gain vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

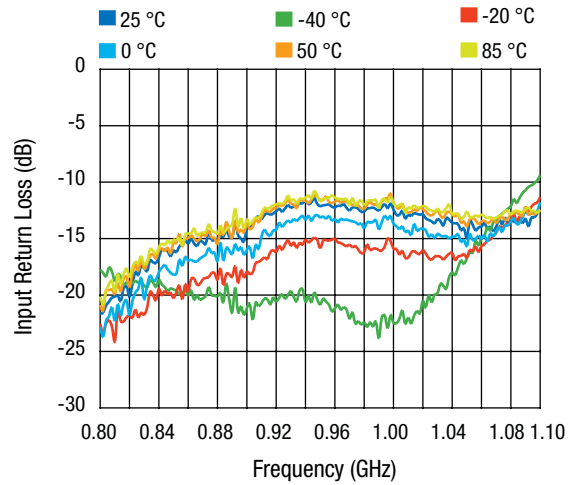


**Input Return Loss vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

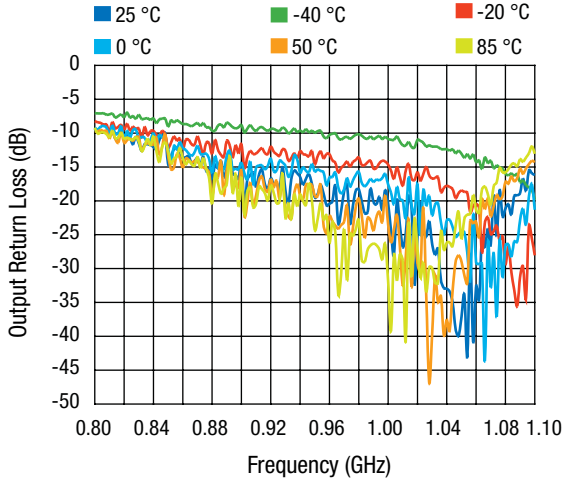


**Output Return Loss vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

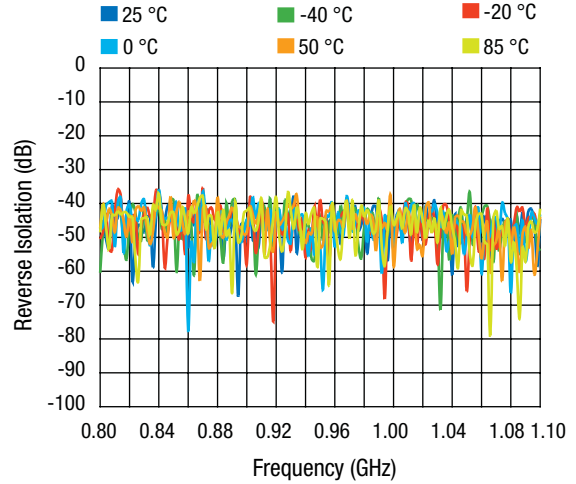


**Reverse Isolation vs. Frequency,  $V_{CC} = 3.5\text{ V}$   
 $P_{IN} = -30\text{ dBm}$ ,  $V_{APC1,2} = 2.7\text{ V}$**

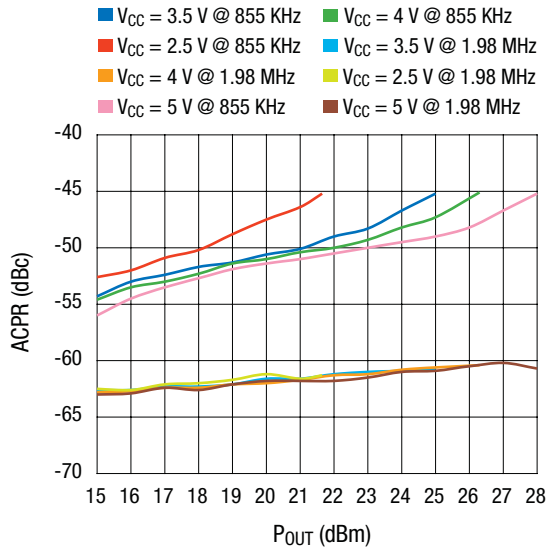


**ACPR vs,  $P_{OUT}$  and Frequency  
IS-95,  $V_{APC1,2} = 2.7\text{ V}$ , 881 MHz @ 25 °C**

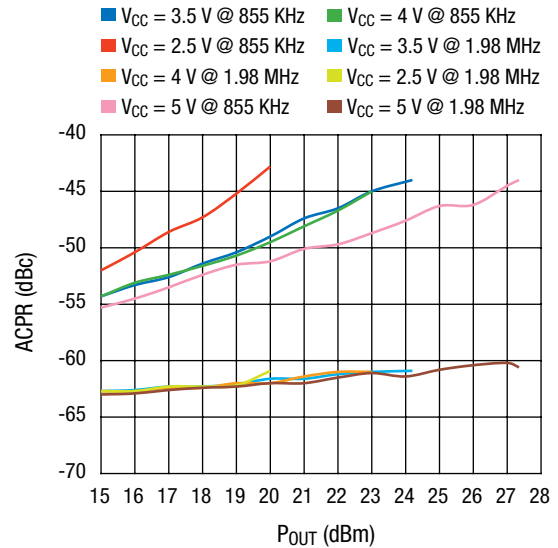


**ACPR vs,  $P_{OUT}$  and Frequency  
IS-95,  $V_{APC1,2} = 2.7\text{ V}$ , 836 MHz @ 25 °C**

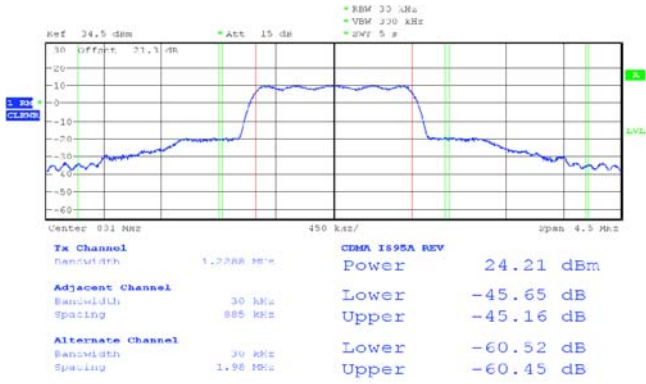


ACPR, IS-95 REV,  $V_{CC}$  3.5 V,  $V_{APC1, 2} = 2.7$  V  
831 MHz @ 25 °C

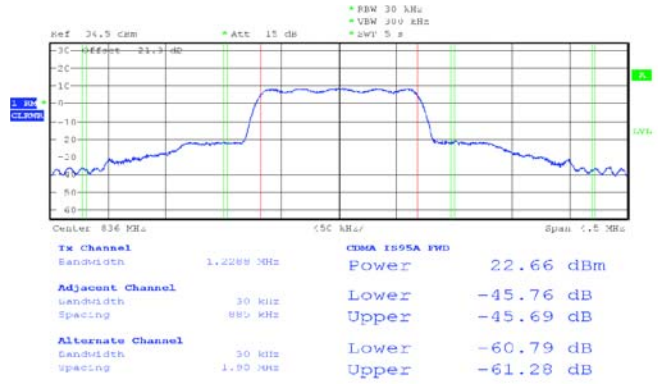


ACPR, IS-95 FWD,  $V_{CC}$  3.5 V,  $V_{APC1, 2} = 2.7$  V  
836 MHz @ 25 °C

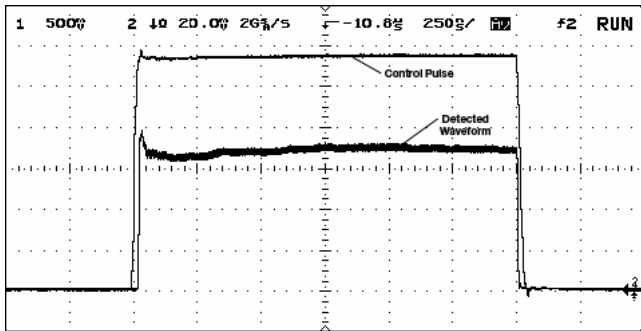

Response Time,  $P_{IN} = -15$  dBm, 915 MHz,  $V_{CC} = 3.5$  V,  
 $V_{APC1, 2} = 2.7$  V @ 25 °C

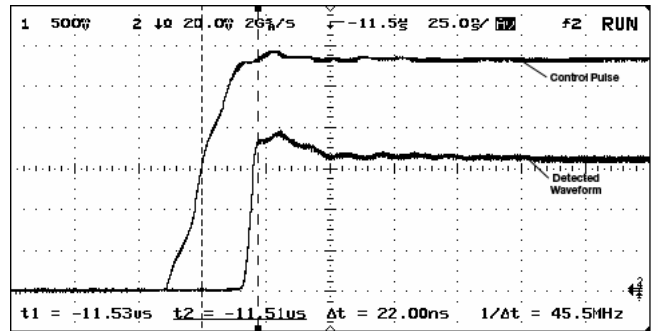

Response Time, Rise Time, 50% Ctrl, 90% RF  
 $V_{APC1, 2} = 2.7$  V/0 V @ 25 °C

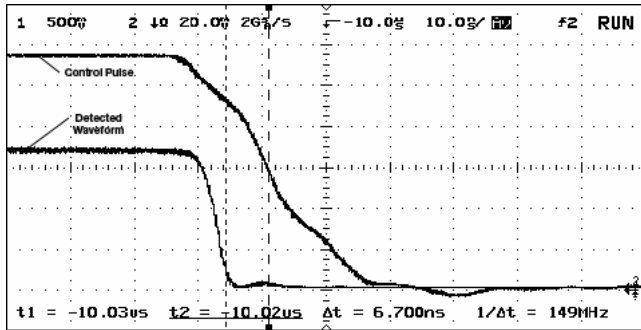

Response Time, Fall Time 90% RF, 50% Ctrl  
 $V_{APC1, 2} = 2.7$  V/0 V @ 25 °C


**Bill of Material for Evaluation Board**

Designator	Value	Size	Manufacturer	Part Number	Notes
C1	100 pF	0402	Murata	GRM1555C1H101JD83E	
C2	2.2 pF	0402	Murata	GRM1555C1H2R2JZ35E	
C3	4.7 pF	0402	Murata	GRM1555C1H4R7JZ35E	
C4	100 pF	0402	Murata	GRM1555C1H101JD83E	
C5	1000 pF	0402	Murata	GRM155R71H102KA01	1
C7	DNP				2
C8	100 pF	0402	Murata	GRM1555C1H101JD83E	
C9	1000 pF	0402	Murata	GRM155R71H102KA01	1
C10	10 $\mu$ F	0402	AVX	TAJA106M006R	
C11	100 pF	0402	Murata	GRM1555C1H101JD83E	1
C12	1000 pF	0402	Murata	GRM155R71H102KA01	1
C13	10 nF	0402	Murata	GRM155R71E103KA01	1
C14	10 $\mu$ F	1206	AVX	TAJA106M006R	
C15	12 pF	0402	Murata	GJM1555C1H120JB01E	
C16	5.6 pF	0402	Murata	GJM1555C1H5R6CB01E	
C17	10 $\mu$ F	1206	AVX	TAJA106M006R	
C18	DNP				2
C19	DNP				2
C20	DNP				2
C21	DNP				2
C22	1000 pF	0402	Murata	GRM155R71H102KA01	
C23	100 pF	0402	Murata	GRM1555C1H101JD83E	
C24	100 pF	0402	Murata	GRM1555C1H101JD83E	
C25	18 pF	0402	Murata	GRM1555C180JZ35E	
L1	1.8 nH	0402	Johanson	L-07C1N8ST	
L2	1 nH	0402	Johanson	L-07C1N0ST	
R1	0 W	0402	Panasonic	ERJ2BJ00X	1
R2	0 W	0402	Panasonic	ERJ2BJ00X	1



1. Panasonic and Murata are Skyworks preferred vendors. However, any suitable equivalent part is acceptable for this component.

2. "DNP" = Do not place.

### Application Circuit

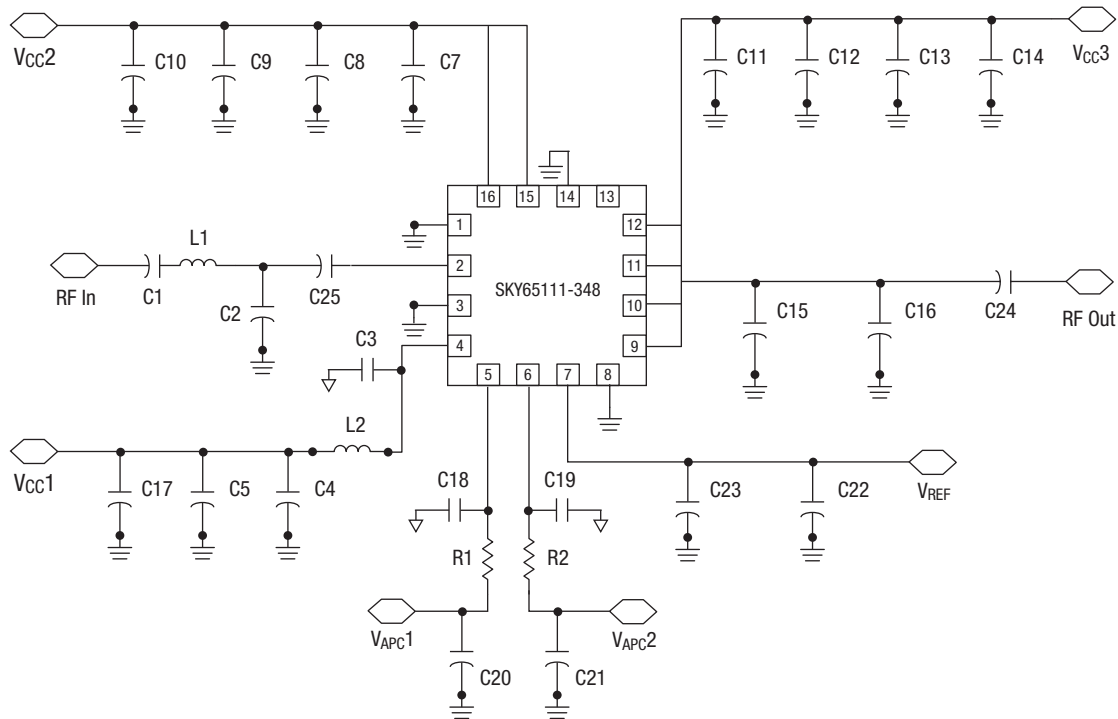

### Component Placement Diagram

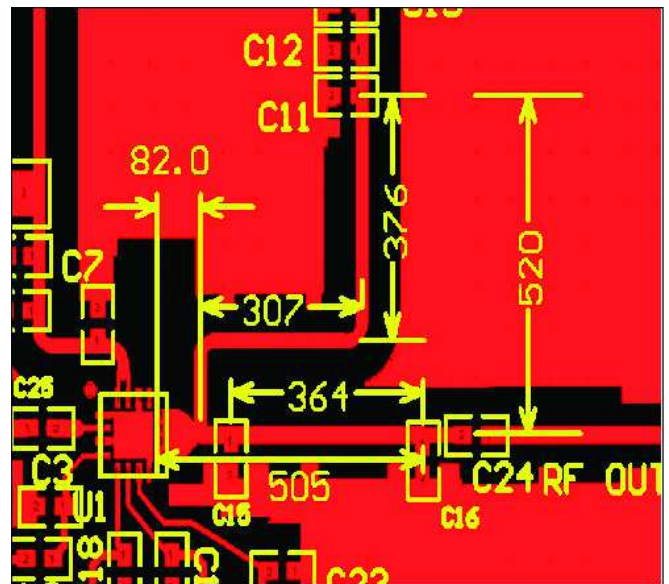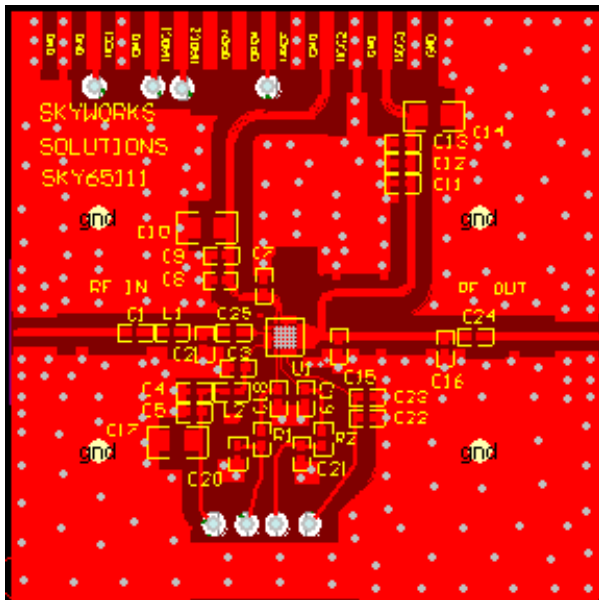

Transmission line width: 0.027 inches.  
Gerber files available upon request.

Incorrect soldering of the device paddle to grounding pad may lead to parasitic oscillations, reduced performance and increased device temperature rise. Uniform coverage over the entire bottom ground paddle must be maintained to avoid these conditions.

## Application Circuit Notes

**Ground, (Pins 1, 3, 8, 14).** Attach all ground pins to the RF ground plane with the largest diameter and lowest inductance via that the layout will allow. Multiple small vias are also acceptable and will work well under the device if solder migration is an issue. It is extremely important that the device paddle be sufficiently grounded for both thermal and stability reasons. Please refer to the enclosed Package Footprint.

**RF input (Pin 2).** A lumped element matching structure for good in-band return loss has been realized on the RF input, Pin 2. This structure is comprised of a DC blocking capacitor (C1), low pass LC filter (L1, C1) and at the device input, a series capacitor (C25). This combination of devices will yield a return loss better than -11 dB over the entire 800–1100 MHz band of interest. The placement of C1 is not critical; it can be moved as close to L1, C2 and C25 as desired. C25 should be placed as close to the device pin as possible to replicate performance as measured on the applications board.

**V<sub>CC1</sub> (Pin 4).** V<sub>CC1</sub> is the collector bias for the first amplifier stage in the SKY65111. Multiple bypass capacitors, C3-C5, C17 and a series inductor, L2, have been utilized to ensure stability both in and out of the useable bandwidth of the device. The length of transmission line between L2 and Pin 4 is not critical; L2 can be placed as close to the pin as possible if desired. However, placement of L2 farther away from Pin 4 than shown on the Applications Circuit is not recommended. C3 should also be placed in the approximate location shown on the Applications Circuit, but placement is not critical.

**V<sub>APC1</sub> (Pin 5).** V<sub>APC1</sub> is the bias control voltage input for amplifier stages 1 and 2. Nominal operating range is between 2.6 V<sub>DC</sub> and 2.8 V<sub>DC</sub>, with 3 V<sub>DC</sub> producing the minimum attenuation point. V<sub>APC1</sub> may also be set to 0 V<sub>DC</sub>, to force stages 1 and 2 into standby mode.

**V<sub>APC2</sub> (Pin 6).** V<sub>APC2</sub> is the bias control voltage for amplifier stage 3. Nominal operating range is between 2.6 V<sub>DC</sub> and 2.8 V<sub>DC</sub>, with 3 V<sub>DC</sub> producing the minimum attenuation point. A 100 pF capacitor (C19) may be used for bypassing at high frequencies. The value of this capacitor may also be made large, greater than 1000 pF, if longer response time is acceptable. V<sub>APC2</sub> may also be set to 0 V<sub>DC</sub>, to place amplifier stage 3 into standby status.

---

**NOTE:** In most applications V<sub>APC1</sub> and V<sub>APC2</sub> pins are directly tied together and biased from the same control voltage. V<sub>APC1</sub> and V<sub>APC2</sub> may also be split if independent control is desired.

---


**V<sub>REF</sub> (Pin 7).** V<sub>REF</sub> is the bias reference voltage for amplifier stages 2 and 3. V<sub>REF</sub> should be operated over the same voltage range as V<sub>CC</sub>, with a nominal voltage of 3.5 V<sub>DC</sub>. Bypassing of V<sub>REF</sub> is accomplished with C22 and C23 which should be placed as close to the device pin as possible.

**RF<sub>OUT</sub>, V<sub>CC3</sub> (Pins 9-12).** RF<sub>OUT</sub> and V<sub>CC3</sub> are the biasing input of the stage 3 collectors. Bias is applied to the RF output through a length of transmission line that is approximately 827 mils (21 mm) long. Capacitors C11-C14 provide proper RF bypassing and should be placed as shown in the Applications Circuit. Output matching for optimal power gain is accomplished with capacitors C15 and C16. Spacing between these capacitors with respect to the RF output and each other is critical and is shown on the Component Placement Diagram. Special care must be taken when placing these devices; their locations should not deviate significantly from the locations as shown. If these capacitors are not located properly, large decreases in output power and efficiency will occur.

**Pin 13.** Pin 13 has no connection and should be left open circuit.


**V<sub>CC2</sub> (Pins 15-16).** V<sub>CC2</sub> is the collector bias input for the second amplifier stage in the SKY65111. Multiple bypass capacitors, C8-C10 have been utilized to ensure stability both in and out of the useable bandwidth of the device. Capacitor C7 is not populated with the normal tuning configuration described above.

### Package Footprint

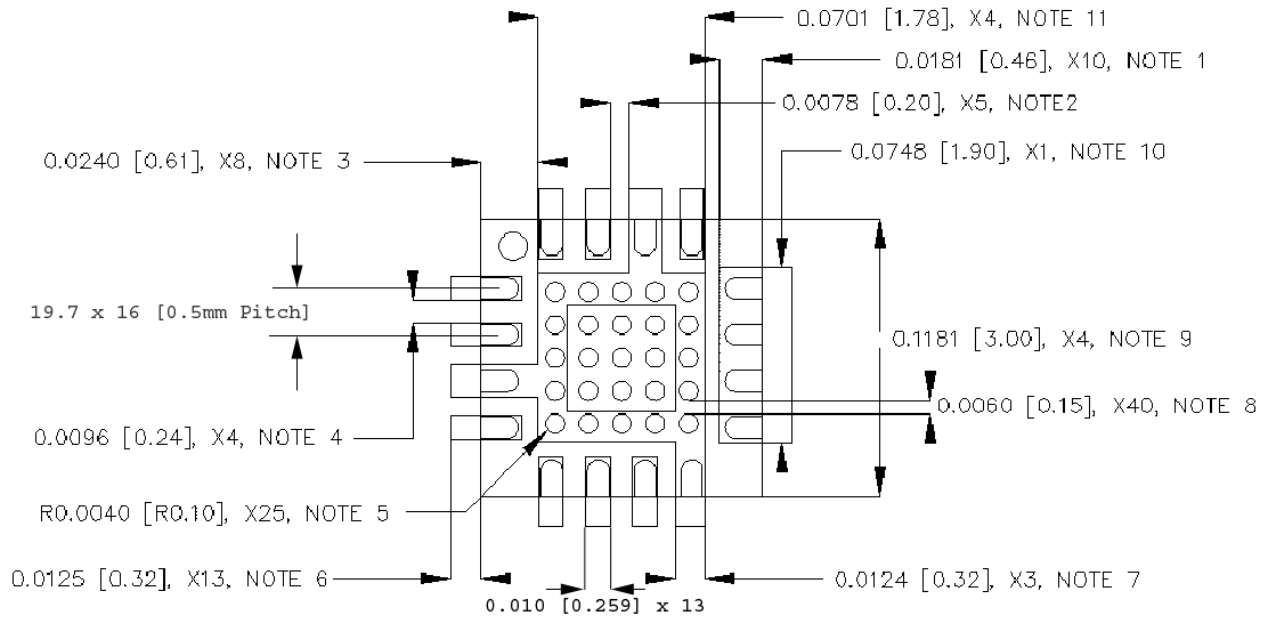

- NOTE: All units in inches [mm].
- NOTE 1: Length of all non-grounded lands underneath the package.
  - NOTE 2: Width between grounded lands and non-grounded lands.
  - NOTE 3: Length of from ground pad to edge of package.
  - NOTE 4: Width between non-grounded lands.
  - NOTE 5: Radius of the vias.
  - NOTE 6: Length of all lands from the edge of the package.
  - NOTE 7: Width of the ground lands.
  - NOTE 8: Distance between all vias.
  - NOTE 9: X and Y dimension of the package.
  - NOTE 10: Width of the land for RFOUT.
  - NOTE 11: Width of the land for the ground pad.


### Evaluation Board Stack-Up

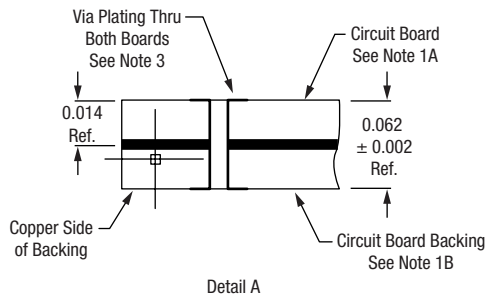

### Application Board Bias Procedure

- Step 1. Connect DC ground.
- Step 2. Connect all  $V_{CC}$  and  $V_{REF}$  lines to 3.5 V supply, labeled 2.
- Step 3. With the RF off, apply 2.7 V<sub>DC</sub> to V<sub>APC</sub>1, 2 control pins. Verify the I<sub>CQ</sub> current is approximately 250 mA, labeled 3.
- Step 4. Apply RF signal data -30 dBm level and observe that the output level is approximately 10 dBm or the gain of the device is approximately 40 dB.

**NOTE:** It is important that the  $V_{CC1}$ ,  $V_{CC2}$ ,  $V_{CC3}$ , and  $V_{REF}$  voltage source be adjusted such that 3.5 V is measured at the board. The high collector currents will drop the collector voltage significantly if long leads are used. Adjust the bias voltage to compensate.

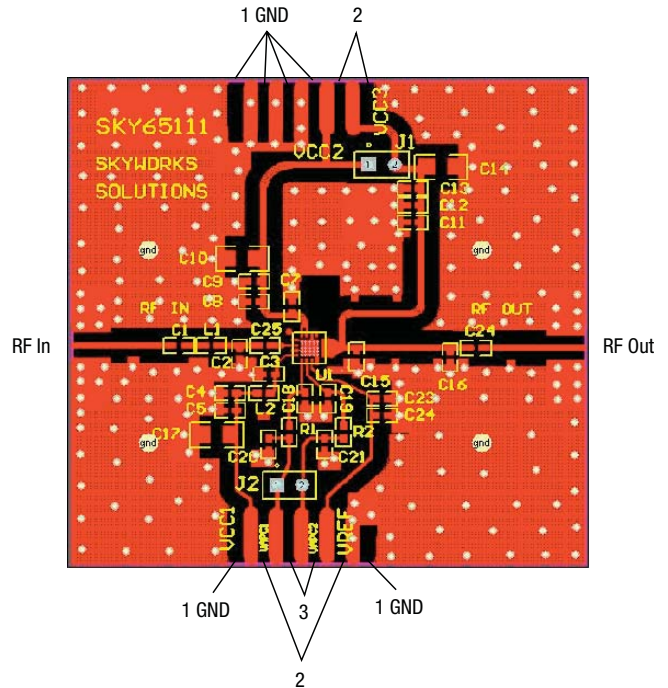


### Recommended Solder Reflow Profiles

Refer to the [“Recommended Solder Reflow Profile”](#) Application Note.

### Tape and Reel Information

Refer to the [“Discrete Devices and IC Switch/Attenuators Tape and Reel Package Orientation”](#) Application Note.

### Branding Specifications

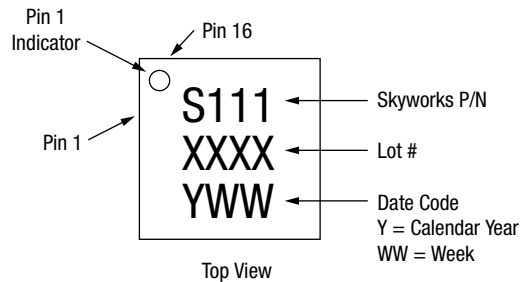



Copyright © 2002, 2003, 2004, 2005, 2006, 2007, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc. ("Skyworks") products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not intended for use in medical, lifesaving or life-sustaining applications, or other equipment in which the failure of the Skyworks products could lead to personal injury, death, physical or environmental damage. Skyworks customers using or selling Skyworks products for use in such applications do so at their own risk and agree to fully indemnify Skyworks for any damages resulting from such improper use or sale.

Customers are responsible for their products and applications using Skyworks products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of stated published specifications or parameters.

Skyworks, the Skyworks symbol, and "Breakthrough Simplicity" are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.