



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



REVISION CE

UNLESS OTHERWISE NOTED

DIMENSIONS ARE IN INCHES	TOLERANCES ARE:	TITLE:	DWG NO:
ONE PLACE DECIMALS ±.1[2.5] TWO PLACE DECIMALS ±.01[.25]	THREE PLACE DECIMALS ±.005 [.13] FOUR PLACE DECIMALS ±.0020[.05]	ANGLES ± 2°	ASSEMBLY SOCKET STRIP
			XSX-1XX-XX-XX-X-X SHEET 1 OF 2

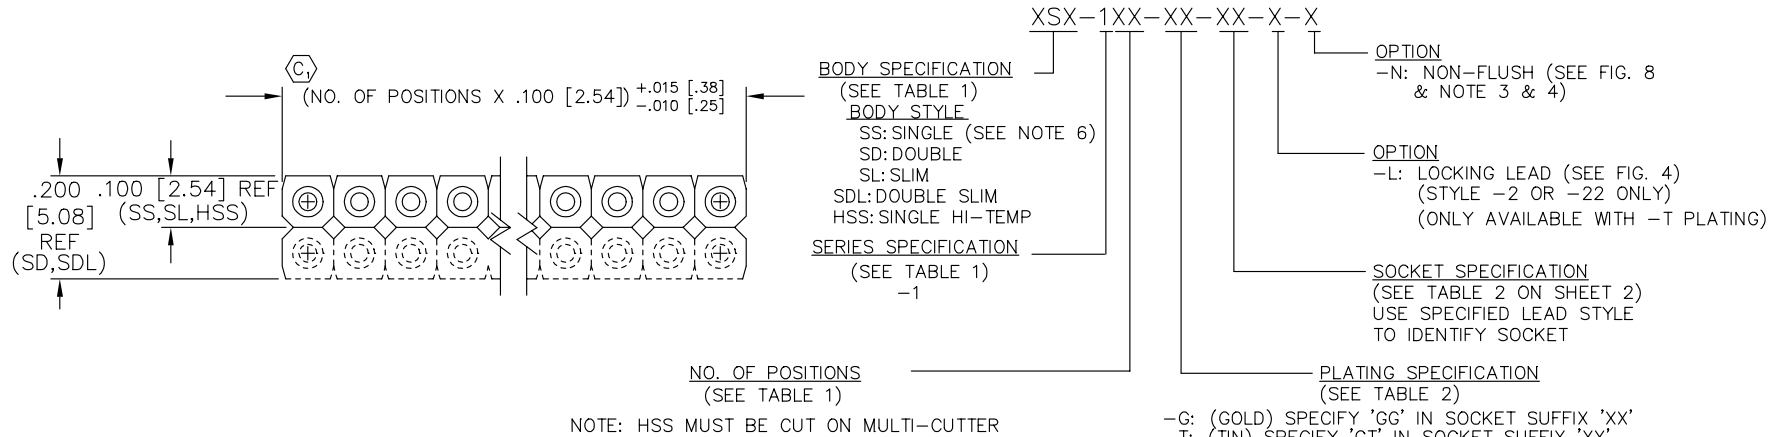


TABLE 1: BODY SPECIFICATION

BODY STYLE	AVAILABLE NO. OF POSITIONS (PER ROW)	SERIES	
		-1	
** SS	-01 THRU -32	SSB-XX	
SD	-02 THRU -36	DSB-XX	
SL	-02 THRU -32	SSL-XX	
****SDL	-01 THRU -36	HSDL-XX	
* HSS	-02 THRU -36	HSS-XX-L	

* SEE NOTE 3
** SEE NOTE 4 **** SEE NOTE 8

PACKAGING TUBE TABLE (SEE NOTE 12)

BODY STYLE (-1 SERIES ONLY)	LEAD STYLE	TUBE	PLUG
HSS	1C, 2, 3, 13, 18, 21C, 22, 23, 38	PT-1-24-01-23	TP-12
SS	2, 3, 13, 18, 22, 23, 38	PT-1-24-01-23	TP-12
SS	29	PT-1-24-02-48	TP-03
SS	1C, 21C	PT-1-24-02-03	TP-24
HSS & SS	-2-L, -22-L	PT-1-24-02-23	TP-12
SL		N/A	
SD	-1C, -2, -18 -21C, -22, -38 -2-L, -22-L	PT-1-24-01-22	TP-03
SD	-1A, -21A	PT-1-24-06-03	TP-07
SDL	ALL STYLES	PT-1-24-01-14	TP-03

- G: (GOLD) SPECIFY 'GG' IN SOCKET SUFFIX 'XX'
- T: (TIN) SPECIFY 'GT' IN SOCKET SUFFIX 'XX'
- TT: (TIN/TIN) SPECIFY 'TT' IN SOCKET SUFFIX 'XX' (FOR SS, SD & HSS SERIES, AVAILABLE IN STYLES -1 (ALL), 2 & 5
NOTE: LIF NOT AVAILABLE
- S: (SELECTIVE) SPECIFY 'ST' IN SOCKET SUFFIX 'XX' (STYLE -2 & -22 ONLY) (N/A IN SL OR SDL) (FOR -L OPTION USE SC-1L1-GT
- E: (EXTRA HEAVY GOLD) SPECIFY 'E' IN SOCKET SUFFIX 'XX' (STYLE -2 & -22 ONLY)

- NOTES:
- 1.) MIN. PUSHOUT FORCE: 5 lbs.
 - 2.) MAX. ALLOWABLE BOW:
FOR STRIPS MOLDED IN VALOX=.003 IN/IN [MM/MM]
FOR STRIPS MOLDED IN RYNITE OR STANYL= .004 IN/IN [MM/MM] (FOR HSS ONLY: .004 IN/IN [MM/MM] TOP TO BOTTOM, .008 IN/IN [MM/MM] SIDE TO SIDE.)
 - 3.) FOR HSS STYLES 5 AND OPTION -N USE HTS-36-L BODY.
 - 4.) USE TBS-32 BODY FOR ALL SS STYLES WITH N OPTION, ALL STYLE -5 SS PARTS, AND STYLE -4 SS PARTS USED IN CSS CABLE.
 - 5.) NOTE DELETED.
 - 6.) FOR SS STYLE 13, USE SSB-32-B ON -1 SERIES SS-1 SERIES AVAILABLE IN -G PLATING ONLY
 - 7.) (C) REPRESENTS CRITICAL DIMENSION.
 - 8.) FOR SDL ONE POSITION USE A SL-132 AND CUT TO A TWO POSITION
 - 9.) FOR -N OPTION, INSERT PIN ON SIDE WITH SMALLER HOLE (OPPOSITE COUNTERBORE SIDE).
 - 10.) FOR SS-200 SERIES, RETENSION TO BE 3.0 LBS. MINIMUM.
 - 11.) .012 MAX FLASH IN CROSS BAR BREAK OFF AREA, .005 MAX FLASH ON ALL OTHER AREAS.
 - 12.) POSITIONS -01 THRU -04 BULK PACKAGED

PROPRIETARY NOTE
THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO SAMTEC INC. AND SHALL NOT BE REPRODUCED OR TRANSMITTED TO OTHER DOCUMENTS OR DISCLOSED TO OTHERS OR USED FOR ANY PURPOSE OTHER THAN THAT FOR WHICH IT WAS OBTAINED WITHOUT THE EXPRESSED WRITTEN CONSENT OF SAMTEC INC.

MATERIAL:
INSULATOR:
GLASS FILLED POLYESTER OR NYLON
COLOR: BLACK
SOCKET:
BeCu / BRASS
BRASS



520 PARK EAST BLVD. NEW ALBANY, INDIANA 47151-1147
PHONE (812) 944-6733 P.O. BOX 1147
CODE 55322

MADE BY: JORDAN 4-20-87 XSX-1XX-XX-XX-X-X
SHEET 1 OF 2