



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



All-rounder

**PULS**

# SL20.300 SL20.301

- Input: 3 AC 400V / 3 AC 480V
- Output: 24...28V / 480W (600W)
- 92% efficiency
- Ideal for parallel operation
- Simple fusing



CE  
EMC and  
Low Volt.  
Directive

UL US  
UL60950 E137006  
CUL/CSA-C22.2  
No. 60950

UL US  
UL508 LISTED  
IND. CONT. EQ.  
18 WIM, 60°C

CB  
scheme  
IEC60950

Data sheet

## Input

Input voltage	SL20.300: 3 AC 400 V, - 15 %, + 20 % SL20.301: 3 AC 480 V, - 15 %, + 20 % (SL20.100: AC 230 V, s. separate data sheet) 47-63 Hz, Suitable for IT power systems
Rated Tolerances	<ul style="list-style-type: none"> <li>• Continuous operation SL20.300: 340-479 V AC resp. 450-700 V DC SL20.301: 408-576 V AC resp. 550-820 V DC</li> <li>• Short term (1 min) at 24 V/20 A SL20.300: 300-550 V AC resp. 370-790 V DC SL20.301: 360-620 V AC resp. 450-890 V DC</li> </ul>
Input current	3 x 1.5 A
Inrush current	< 15 A at 440 V AC, < 17 A at 480 V AC
Inrush current limiting	done with a fixed 47R resistor (not a thermistor) which is bridged after the unit is running, so losses are minimised. That means no reset time even at a warm-start.
Fuse loading	< 2 A <sup>2</sup> s
	To be fused with a 3 x 10A, B-type 'circuit-breaker' switch based on the usual thermomagnetic overload sensing principle (used anyway to fuse the input lines; unit has no internal fuses).
Harmonic current emissions (PFC)	acc. EN 61000-3-2
Transient handling	Active transient filter incorporated, so transient resistance acc.to VDE 0160 / W2 (1300 V / 1.3 ms), for all load conditions.
Hold up time	> 11 ms at 24 V/20 A, $V_{in_{nom}}$

## Efficiency, Reliability etc.\*

Efficiency	typ. 92 % (24 V/20 A, $V_{in_{nom}}$ )
Losses	typ. 42 W (24 V/20 A, $V_{in_{nom}}$ )
MTBF	310.000 h acc. to Siemensnorm SN 29500 (24 V/20 A, $V_{in_{nom}}$ , $T_{amb} = +40$ °C)
Life cycle (electrolytics)	The unit exclusively uses longlife electrolytics, specified for +105°C (cf. 'The SilverLine', p.2). High reliability, as <ul style="list-style-type: none"> <li>• only four aluminium electrolytics and</li> <li>• no small aluminium electrolytics are used.</li> </ul>

\* For further information see data sheets „The SilverLine“, „SilverLine Family Branches“ and mechanics data sheet

## Output

Output voltage	24...28 V DC, adjustable by (covered) front panel potentiometer; preset: 24 V ±0.5% Adjusting range guaranteed
Output noise suppression	Radiated EMI values below EN50081-1, even Silent Switcher™ when using long, unshielded output cables.
Ambient temperature range $T_{amb}$	Operation: 0°C...+70°C (>60°C: Derating) Storage: -25°C...+85°C
Rated continuous loading with convection cooling	<ul style="list-style-type: none"> <li>• <math>T_{amb}=0</math>°C - 60°C 24 V / 20 A (480 W) resp. 28 V / 18 A (504 W)</li> <li>• <math>T_{amb}=0</math>°C - 45°C 24 V / 25 A (600 W) resp. 28 V / 22 A (616 W) short-term also at 60 °C</li> </ul>
Derating	typ. 12 W/K (at $T_{amb}=+60$ °C...+70°C)
Voltage regulation	better than 2% over all
Ripple	< 20 mV <sub>pp</sub> (i.e. < 0.1 %) incl. spikes 20 MHz bandwidth, 50 Ω measurement
Over-voltage protection	At 32 V ± 10%: switch to hiccup mode
Front panel indicators:	<ul style="list-style-type: none"> <li>• Green LED on, when <math>V_{out} &gt; U_T</math>, where <math>U_T</math> is ca. 2 V below <math>V_{out}</math> adjusted (24V...28V)</li> <li>• Red LED on, when <math>14 V &lt; V_{out} &lt; U_T</math></li> <li>• Red LED flashes, when <math>0 V &lt; V_{out} &lt; 14 V</math></li> </ul>
Parallel operation	Yes, up to ten SL20 units
	To achieve current sharing the output V/I characteristic can be altered to be 'softer' (25V at 0.4A, 24V at 20A). This is done by repositioning a bridge connection (without opening the unit).
Reverse power immunity	> 30 V

## Order information

Order number	Description
SL20.300	400 V input
SL20.301	480 V input
SLZ02	Screw mounting set, two needed per unit

**Construction / Mechanics \***

Housing dimensions and Weight

- W x H x D 220 mm x 124 mm x 102 mm (+ DIN rail)
- Free space for ventilation above/below 70 mm recommended left/right 25 mm recommended
- Weight 1.8 kg

Design advantages:

- All connection blocks are easy to reach as mounted at the front panel.
- PVC insulated cable can be used for all connections, as the connection blocks are mounted in the cooler area on the underside of the unit.

**Start / Overload Behaviour**

- Startup delay typ. 0.2 s
- Rise time ca. 20-80 ms, depending on load
- Duration of switch-on attempts at

- Initial application on mains ca. 1.4 s
- Subsequent attempts ca. 0.5 s

- Hiccup operation at  $V_{out} < ca. 14 V$
- Duration between switch-on attempts ca. 4 s

Electronic current limiting, protects against overload and short circuit:

- $V_{out} < ca. 14 V$ : Periodical switch-on attempts (hiccup-mode).
- $V_{out} > ca. 14 V$ : The output current is continuous.

The V/I characteristic of the supply is straight.

Advantages of the switch-on/overload behaviour:

- Safer switch-on into highly non-linear loads with large starting currents
- Short-term overloads result in current limiting and not in an immediate shut-down.
- Parallel operation of several units possible. Proper switch-on performance is obtained.

**Further Information**

For further information, especially about

- EMC
  - Connections
  - Safety, Approvals
  - Mechanics und Mounting,
- see page 2 of the „The SilverLine“ data sheet.


**For detailed dimensions**

see SilverLine mechanics data sheet SL20


**All data is valid for SL20.300.**

**For SL20.301 (with 480 V input) some values may differ.**


**Output V/I characteristic (typ.)**

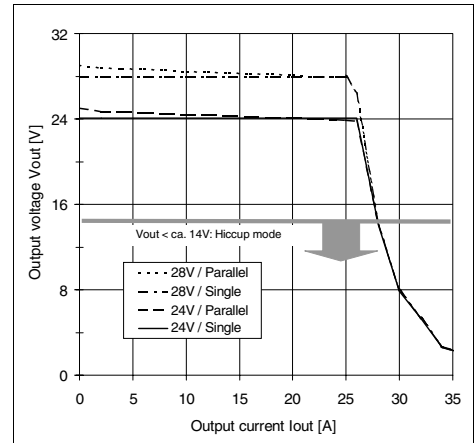

**Efficiency (typ., at V<sub>out</sub>=24V)**

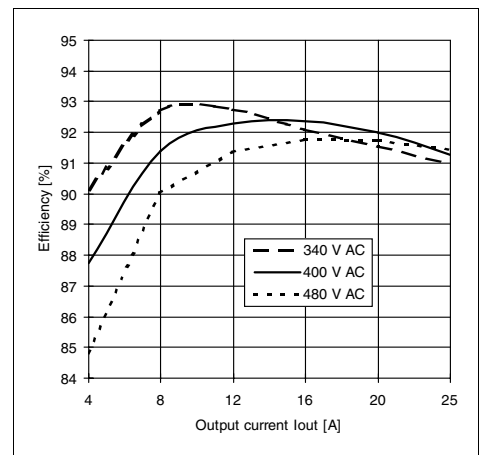

**Hold-up time ((typ., at V<sub>out</sub>=24V)**

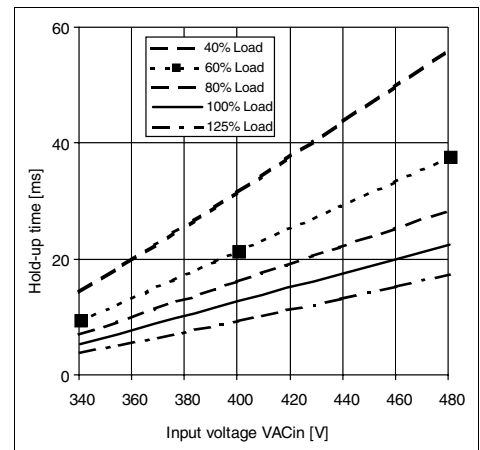

Specifications valid for 3 x AC 400V input voltage, +25°C ambient temperature, and 5 min run-in time, unless otherwise stated. They are subject to change without prior notice.

**Your partner in power supply:**



European Power Supply Manufacturers Association



Bayerns Best 50  
Czech 100 Best  
Europe's 500

**PULS GmbH**

Arabellastraße 15  
D-81925 München  
Tel.: +49 89 9278-0  
Fax: +49 89 9278-199  
www.puls-power.com