



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



3M™ TWIN AXIAL CABLE, SL8800 SERIES

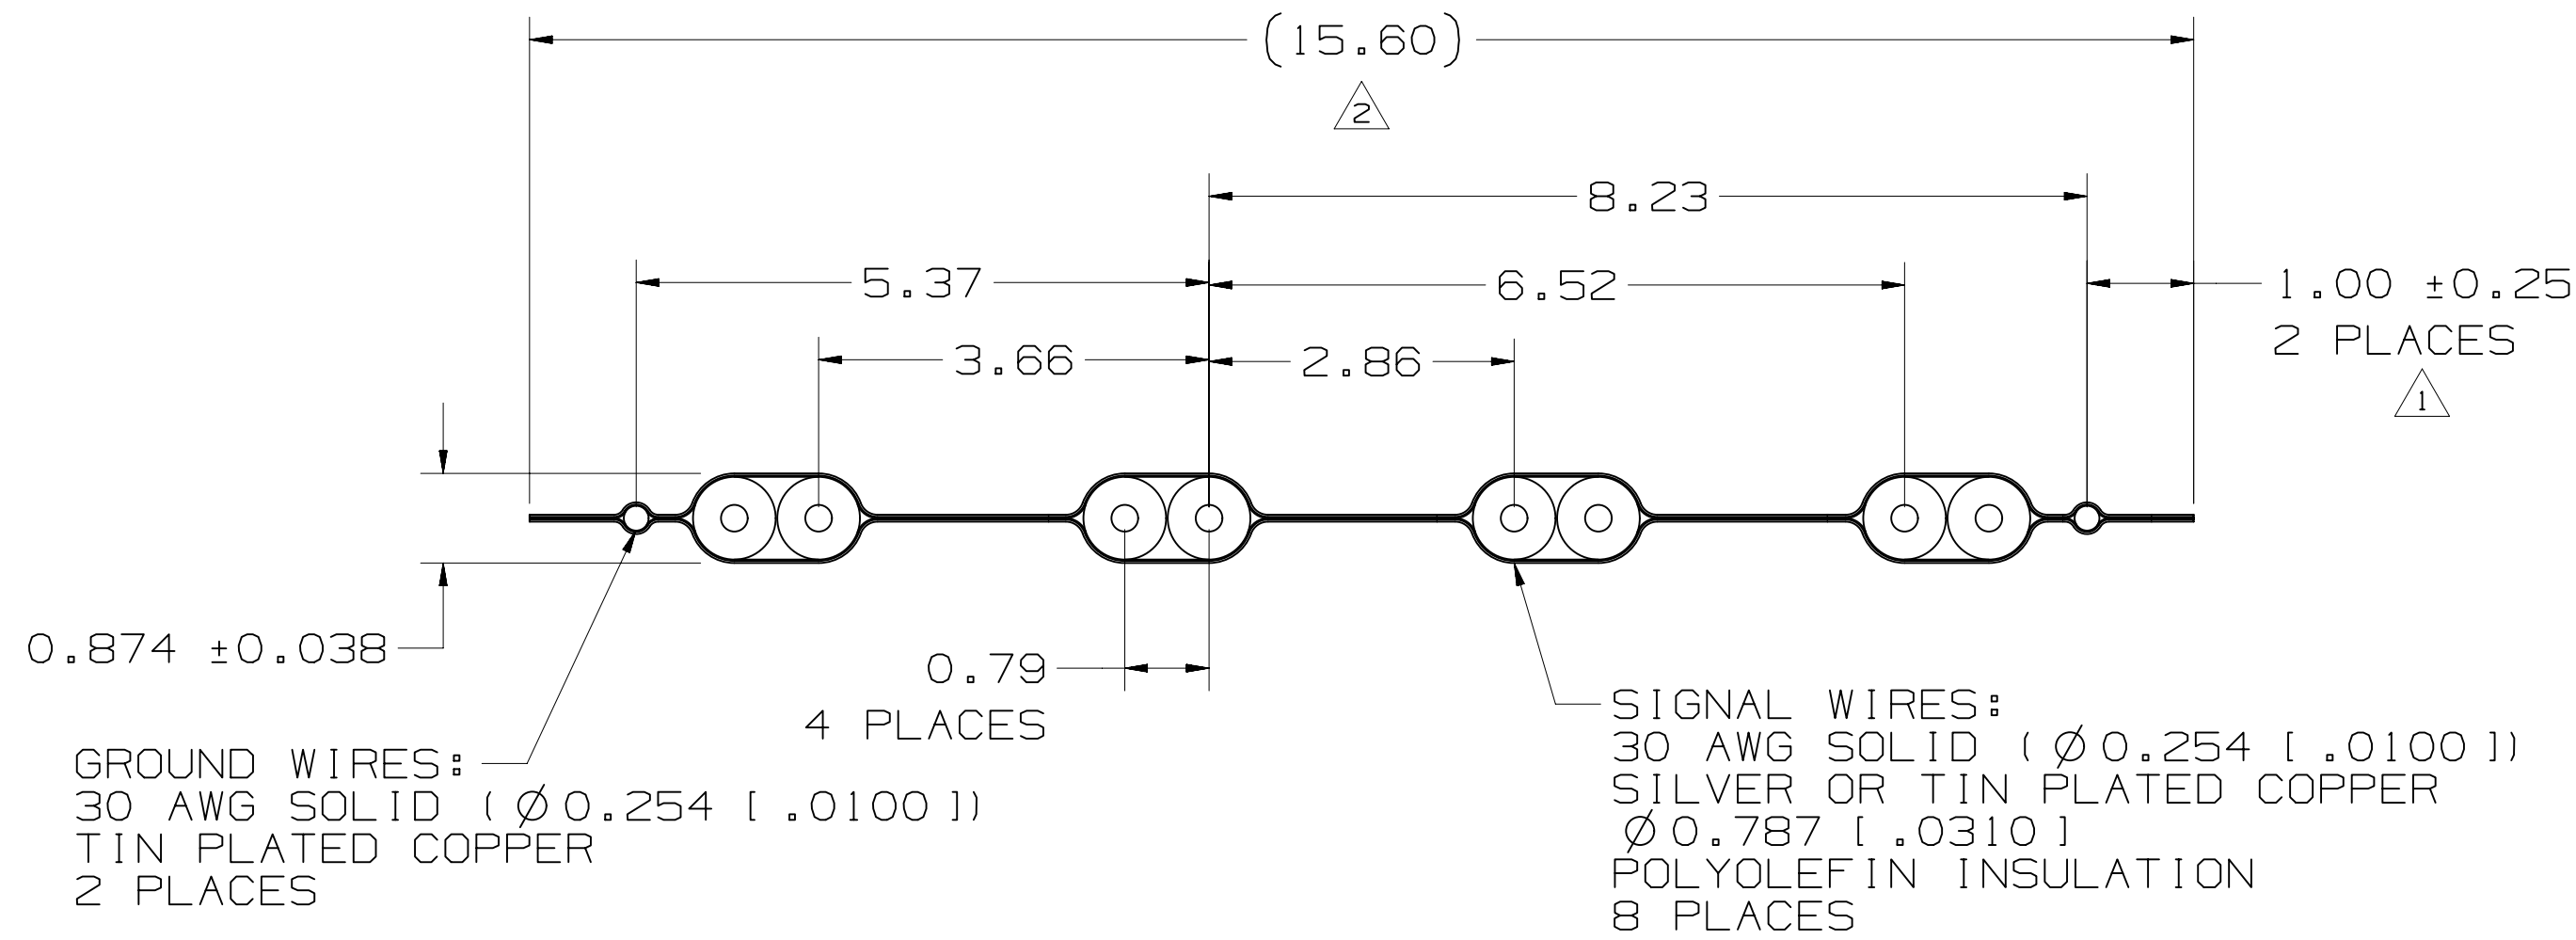

SIGNAL WIRE PLATING OPTION	3M PART NUMBER
SILVER	SL8802/08-20DN5-00
TIN	SL8802/08-21DN5-00

NOTES

- DIMENSIONS ARE IN MILLIMETERS.
- PHYSICAL:
COLOR: SILVER
MARKING:
3M (part number) 30 AWG (signal plating) (lot code)
EXAMPLE:
3M SL8802/08-20DN5-00 30 AWG SILVER TW602-1
- ELECTRICAL:
IMPEDANCE: 100 ± 5 OHMS
- PRODUCT SPECIFICATION NUMBER:
PS-0105
- REGULATORY INFORMATION:
ROHS COMPLIANT. SEE THE REGULATORY INFORMATION APPENDIX (RIA) IN THE "ROHS COMPLIANCE" SECTION OF WWW.3MCONNECTORS.COM FOR COMPLIANCE INFORMATION (RIA E1 & C1 APPLY)

UL FILE NUMBER: E42769
- THE OUTER SURFACE OF THE RIBBON CABLE HAS A METALLIC APPEARANCE, BUT IS NOT CONDUCTIVE. THERE IS A TRANSLUCENT POLYESTER OUTER LAYER OVER AN ALUMINUM SHIELDING LAYER, WHICH GIVES THIS APPEARANCE.

THIS CABLE CONSTRUCTION HAS A THIN ALUMINUM LAYER AT EACH EDGE USER SHOULD EVALUATE ITS USE IN THEIR APPLICATION AND, IF NECESSARY, INSULATING TAPE MAY BE APPLIED TO COVER THE ALUMINUM LAYER, AS USER DEEMS APPROPRIATE.
- FOIL AND INSULATOR STRIPPING BLADE DESIGN DRAWINGS ARE AVAILABLE UPON REQUEST.
TOOLING REFERENCE NUMBER:
NU7E

C	47174	APR 15, 2013	LDS	RDE
		REVISED NOTE 6		
		2 WAS: (15.93)		
		1 WAS: 1.17 ± 0.25		
		REDIMENSIONED PRINT		
B	38575	JAN 26, 2012	LDS	DLD
		REMOVED SHT 2 & 3:		
		REVISED NOTE 7		
A		APR 11, 2011	ML	ML
REV	ECO	ISSUE DATE AND DESCRIPTION	DRFT	CHKD

DESIGN REFERENCE NEXT ASSEMBLY

ACCESS CODES

DIVISION

DO NOT SCALE DRAWING

SCALE 15/1

THIRD ANGLE PROJECTION

INTERPRET PER ASME Y14.5 - 1994

MAX SURFACE ROUGHNESS 125

ALL SURFACES MARKED ONLY

TOLERANCES EXCEPT AS NOTED

INCHES

MILLIMETERS

ANGLES ± 1°

DRFT MWL

DATE APR 11, 2011

DATE

APPVL

DATE

3M 3M Center St. Paul, MN 55144

© 3M COPYRIGHT 2012

This document and the information it contains are 3M property and may not be reproduced or further distributed without 3M permission, or used or disclosed other than for 3M authorized purposes. All rights reserved.

TITLE

SL8802/08-2XDN5-00, 100 OHM, 30 AWG, 4PR

CAGE NUMBER SIZE DRAWING NO. REV. C 78-5100-2413-2 C

MODEL

DET. LISTS YES NO SHT 1 OF 1