



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SMD Inductors(Coils) For Power Line(Wound, Magnetic Shielded)

Conformity to RoHS Directive

SLF Series SLF7030

FEATURES

- The SLF series are characterized by low profile, low DC resistance, and high current handling capacities.
- Because they are magnetically shielded, these parts can be used in high-density mounting configurations.
- Flat bottom surface ensures secure, reliable mounting.
- Provided in embossed carrier tape packaging for use with automatic mounting machines.


APPLICATIONS

Portable telephones, personal computers, hard disk drives, and other electronic equipment.

SPECIFICATIONS

Operating temperature range	-20 to +85°C [Including self-temperature rise]
Storage temperature range	-40 to +85°C[Unit of products]

RECOMMENDED REFLOW SOLDERING CONDITIONS

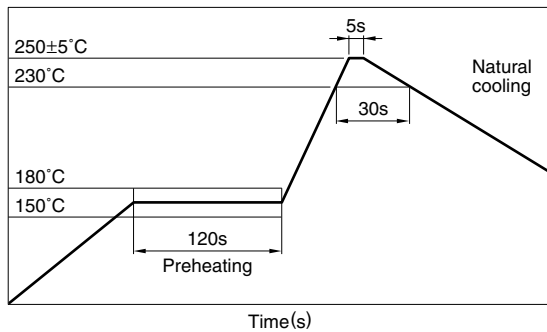

PRODUCT IDENTIFICATION

SLF	7030	T-	220	M	R86	-	PF
(1)	(2)	(3)	(4)	(5)	(6)	(7)	

(1) Series name

(2) Dimensions

7030	7.0×7.0×3.0mm (L×W×T)
------	-----------------------

(3) Packaging style

T	Taping(reel)
---	--------------

(4) Inductance value

3R3	3.3μH
100	10μH

(5) Inductance tolerance

M	±20%
---	------

(6) Rated current

1R8	1.8A
R86	0.86A

(7) Lead-free compatible product

PF	Lead-free compatible product
----	------------------------------


PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	1000 pieces/reel

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

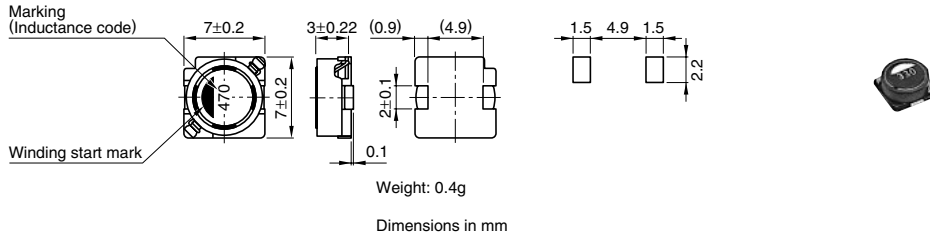

ELECTRICAL CHARACTERISTICS

Inductance (μH)	Inductance tolerance	Test frequency L (kHz)	DC resistance (Ω)±20%	Rated current (A)*max.	Part No.
3.3	±20%	100	0.023	1.8	SLF7030T-3R3M1R8-PF
4.7	±20%	100	0.036	1.6	SLF7030T-4R7M1R6-PF
6.8	±20%	100	0.041	1.5	SLF7030T-6R8M1R5-PF
10	±20%	100	0.053	1.3	SLF7030T-100M1R3-PF
15	±20%	100	0.084	1	SLF7030T-150M1R0-PF
22	±20%	100	0.11	0.86	SLF7030T-220MR86-PF
33	±20%	100	0.16	0.65	SLF7030T-330MR65-PF
47	±20%	100	0.24	0.57	SLF7030T-470MR57-PF
68	±20%	100	0.31	0.49	SLF7030T-680MR49-PF
100	±20%	100	0.45	0.35	SLF7030T-101MR35-PF

* Rated current: Value obtained that the nominal value of inductance has fallen by 10% and the temperature rise specifications.

- Test equipment L: 4194A IMPEDANCE/GAIN-PHASE ANALYZER HP, or equivalent (Measured at 100kHz/0.5V)
Rdc: MATSUSHITA, VP-2941A DIGITAL MILLIOHM METER, or equivalent

TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

