



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Tri-Mode Dimming™ (TRIAC, ELV & 0-10 V), High Power, CC LED Drivers with 1-100% Dimming Range

Nominal Input Voltage	Max. Output Power	Output Voltage	Output Current	Efficiency	Max. Case Temperature	THD	Power Factor	Dimming Method	Dimming Range	Startup Time
120 to 277 Vac, 220 to 240 Vac	160 W	21 to 85 Vdc	1.8 A to 4.4 A CC	up to 90% typical	90°C (measured at the hot spot)	< 20%	> 0.9	Forward-Phase, Reverse-Phase & 0 - 10V	1 - 100% (% of Iout)	0.5 sec

CC: Constant Current

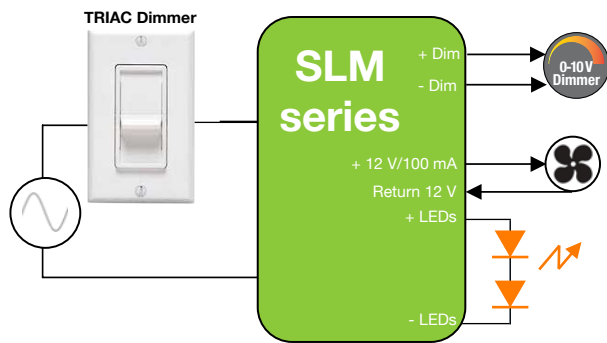

Aluminum Case
L 101.6 x W 50.8 x H 38.5 mm
(L 4 x W 2 x H 1.52 in)

ERP Part Number	Nominal Input Voltage (Vac)	Iout (A)	Max Output Power (W)	Output Voltage Range (Vdc)	
				Min	Max
SLM90W: up to 90 W					
SLM090W-1.05-84-ZA ⁽⁴⁾	120 to 277	1.1	88.2	60	84
SLM090W-2.1-42-TC ⁽¹⁾	120 to 277	2.1	88.2	30	42
SLM100W: 91 to 100 W					
SLM100W-1.7-56-TA ⁽²⁾	120 to 277	1.7	95.2	40	56
SLM120W: 111 to 120 W					
SLM120W-2.0-56-TA ⁽²⁾	120 to 277	2	112.0	40	56
SLM120W-2.8-42-XA ⁽³⁾	120 to 277	2.8	117.6	30	42
SLM140W: 131 to 140 W					
SLM140W-1.05-130-ZA ⁽⁴⁾	120 to 277	1.05	136.5	93	130
SLM160W: 151 to 160 W					
SLM160W-1.0-160-ZA ⁽⁴⁾	120 to 277	1	160.0	129	160
SLM160W-2.8-56-ZA ⁽⁴⁾	120 to 277	2.8	156.8	40	56
SLM160W-3.7-42-XA ⁽³⁾	120 to 277	3.7	155.4	30	42
SLM160W-3.9-40-ZA ⁽⁴⁾	120 to 277	3.9	156.0	30	40
SLM160W-4.4-36-ZA ⁽⁴⁾	120 to 277	4.4	158.4	28	36

Notes:

1. T: Tri-mode dimming (1-100%), C: 1kV /2kV surge protection & IP64
2. T: Tri-mode dimming (1-100%), A: 4kV/6kV surge protection & IP66
3. X: No dimming, A: 4kV/6kV surge protection & IP66
4. Z: 0-10V dimming only (1-100%), A: 4kV/6kV surge protection & IP
5. For additional options of output current and output voltage, contact your sales representative or send an email to: SaveEnergy@erp-power.com

FEATURES

- Compatible with TRIAC (forward-phase or leading-edge), ELV (reverse-phase or trailing-edge), and 0-10 V dimmers
- +12 V/100 mA auxiliary output to power external fan, motion or ambient light sensor, or wireless module
- Outdoor surge protection: 4 kV line to line / 6 kV line to earth
- Protections: output open load, short-circuit (latch-off), and over-temperature with auto recovery
- Conducted and radiated EMI: Compliant with FCC CFR Title 47 Part 15 Class A at 120 Vac and 277 Vac
- Complies with ENERGY STAR® luminaire specification and DLC (DesignLight Consortium®) technical requirements
- Lifetime: 50,000 hours min at 70°C case temperature
- IP66-rated case with silicone-based potting
- 90°C maximum case hot spot temperature

APPLICATIONS

- Low bay lights
- High bay lights
- Grow Lights/Horticulture
- Street Lights



CHINA Operations
tel: +86-756-6266298
No. 8 Pingdong Road 2
Zhuhai, Guangdong, China 519060

www.erp-power.com

SaveEnergy@erp-power.com

USA Headquarters
tel: +1-805-517-1300
893 Patriot Drive, Suite E
Moorpark, CA 93021, USA