



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



▶▶▶ SlimLine Plus Gigabit Industrial Connectivity




PRODUCT HIGHLIGHTS

- 2 Gigabit Ethernet ports (10/100/1000)
- 1 Gigabit SFP port
- High performance and reliability
- Industrial-hardened design

APPLICATIONS

- Video & Security
- Transportation
- Oil & Gas
- Mining
- Maritime

The SLX-3EG is a 3 port all Gigabit industrial Ethernet media converter that provides fast performance to enable real-time operation in industrial networking applications. With rugged packaging that offers superior reliability in the harshest of conditions, our easy-to-use converters require no user setup and immediately start operating upon power up.

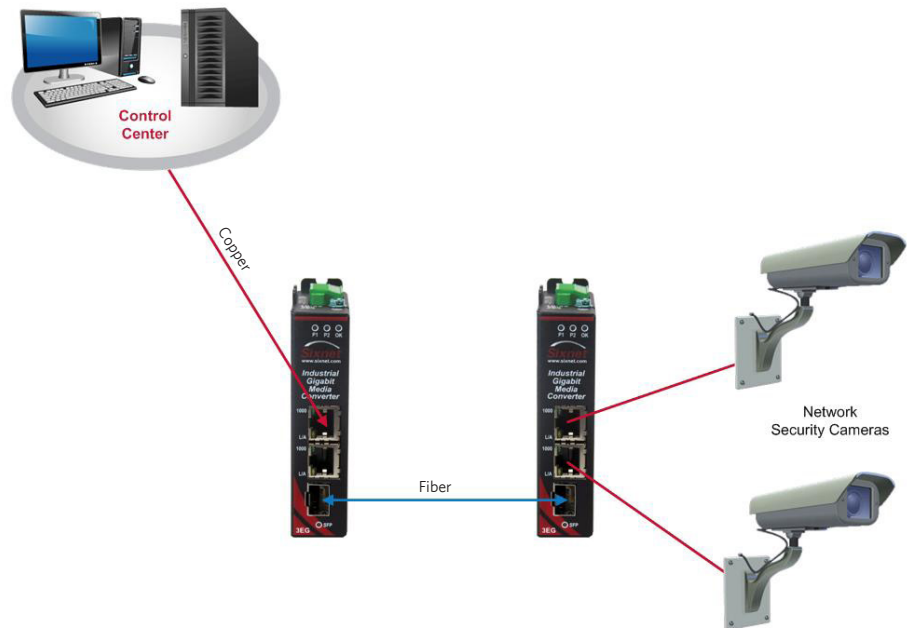

- **Provides plug-and-play simplicity**
- **Offers ease of use**
 - All Gigabit ports
 - Flexible fiber configuration via SFP
 - Auto-sensing for speed and duplex
 - Auto-MDI/MDIX-crossover works with straight or crossed cables
 - Auto-polarity corrects for crossed signals
 - No user configuration required
 - Dual redundant power inputs
- **Supports deployment in extreme environments**
- **Provides high reliability in the toughest applications**
 - Ultra-reliable 1,000,000+ hours MTBF
 - -40° to +85°C operating temperature
 - Rugged corrosion-resistant metal enclosure
 - Hazardous locations for Class I, Div 2 and Zone 2

▶▶▶ SLX-3EG Industrial Ethernet Media Converter Specifications

- Type: unmanaged
 - Operation: store and forward wire-speed switching, non-blocking
 - Modes: full or half duplex operation with flow control on all ports
 - MAC addresses: 1,024
 - Memory bandwidth: 3.2 Gbps
 - Latency (typical/plus frame time)
 - 5 μ S for 100 Mbps
 - 16 μ S for 10 Mbps
 - Jumbo frames: up to 10K
 - Ethernet isolation: 1,500 Vrms 1 minute
- Operating temperature: -40 to +85°C
 - Cold startup: -40°C
 - Storage temperature: -40 to +85°C
 - Humidity: 5 to 95% RH (non-condensing; conformal coating optional)
 - Shock and vibration: IEC60068-2-6 and -27
 - Maximum Operating Altitude: 30,000 ft.
- 2 RJ45 ports fully IEEE 802.3 compliant
 - Speed (10/100/1000) and duplex settings (full or half): auto-detecting
 - Auto-MDI/MDIX-crossover automatically supports either straight or crossed cables
 - Auto-polarity for automatic correction of crossed TD and RD pairs
- Standards: IEEE 802.3, 802.3u, 802.3x
 - Electrical safety: UL508, CSA C22.2/14; EN61010-1, CE
 - EMC: FCC part 15, ICES-003; EN610006-2/4, CE
 - Hazardous locations: UL1604, CSA C22.2/213 (Class I, Div 2); EN60079-15 (Zone 2; Category 3), CE (ATEX)
 - Marine/maritime/offshore compliance
 - NEMA TS-2 for traffic control systems
 - MTBF: >2MM hours GB @ 40°C per MIL-HNDBK-217F2
 - RoHs and WEEE compliant
- 1 SFP (pluggable) ports accept Mini-GBIC transceivers with speeds up to 1,000 Mbps
 - See separate datasheet for fiber transceiver specifications
- Dual power inputs for redundant power
 - Reverse polarity protection
 - Input voltage range: 10 to 30 VDC
 - Power consumption (typical with all ports linked and active): 3.0 W
 - Transient protection: 15,000 W peak
 - Spike protection: 5,000 W (10 times for 10 μ S)
- Material: corrosion-resistant aluminum
 - Ingress protection: IP40
 - Mounting: DIN-rail or direct-to-panel
 - Weight: 6 oz (0.17 kg)
 - Dimensions: 3" x 1" x 4.50" (7.62cm x 2.54cm x 11.43cm)

All specifications are subject to change. Contact Sixnet to learn more.

SLX-3EG-1SFP	All Gigabit, 2 RJ45 ports and 1 SFP fiber port
GMFIBER-SFP-500	Gigabit SFP fiber transceiver, mm, 550 m
GMFIBER-SFP-2K	Gigabit SFP fiber transceiver, mm, 2 km
GSFIBER-SFP-10K	Gigabit SFP fiber transceiver, sm, 10 km
GSFIBER-SFP-30K	Gigabit SFP fiber transceiver, sm, 30 km
GSFIBER-SFP-50K	Gigabit SFP fiber transceiver, sm, 50 km
GSFIBER-SFP-80K	Gigabit SFP fiber transceiver, sm, 80 km



www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

**Europe
Middle East
Africa**
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0208 041615 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.