



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




SLX-5EG-2SFP Industrial Ethernet Switch

Sixnet Networking Series



▶▶▶ SlimLine Plus Gigabit Industrial Connectivity



PRODUCT HIGHLIGHTS


- 3 fully IEEE-compliant Gigabit PoE ports (10/100/1000)
- 2 Gigabit SFP ports
- High performance and reliability
- Industrial-hardened design

APPLICATIONS

- Video & Security
- Transportation
- Oil & Gas
- Mining
- Maritime

The 5-port Red Lion Sixnet SLX-5EG-2SFP (2 + 3G) all Gigabit Ethernet switch is designed for exceptional performance and superior reliability in industrial networking environments. Gigabit operation drives ultrafast data throughput and network efficiency. The SLX series features rugged construction optimized for high tolerance to extreme environmental conditions. Convenient plug-and-play capabilities eliminates time-consuming setup and configuration. Ethernet SFP ports for fiber or copper links can be mixed and matched to provide port flexibility.

APPLICATION SCENARIO: VIDEO & SECURITY

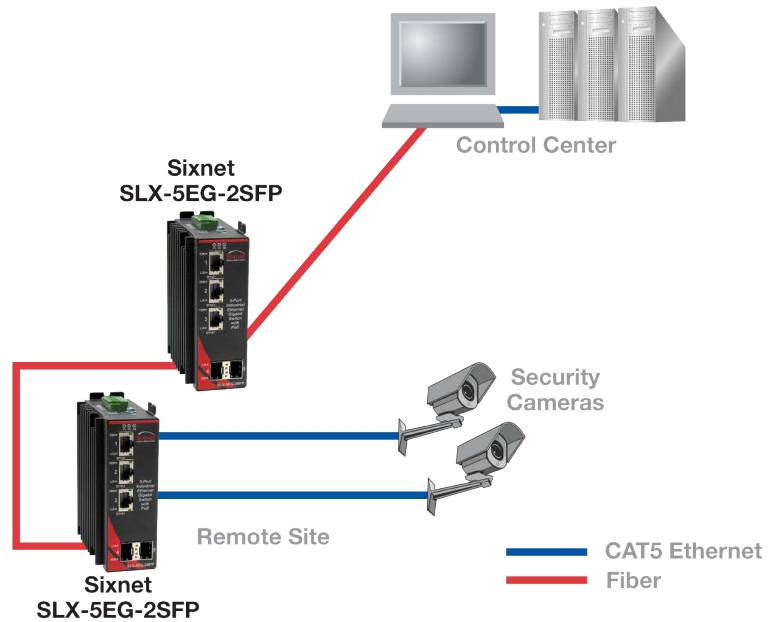

FEATURES & BENEFITS

Real-Time Ethernet Performance

- Provides plug-and-play simplicity
- Offers ease of use
 - All Gigabit ports
 - Flexible fiber configuration via SFP
 - Auto-sensing for speed and duplex
 - Auto-MDI/MDIX-crossover works with straight or crossed cables
 - Auto-polarity corrects for crossed signals
 - No user configuration required
 - Dual redundant power inputs

Rugged, Reliable Operation

- Supports deployment in extreme environments
- Provides high reliability in the toughest applications
 - Ultra-reliable 1,000,000+ hours MTBF
 - Operating temperature: -40° to +85°C
 - Rugged corrosion-resistant metal enclosure
 - Hazardous locations for Class I, Div 2 and Zone 2

SPECIFICATIONS

Ethernet Performance

- Type: unmanaged
- Operation: store and forward wire-speed switching, non-blocking
- Modes: full or half duplex operation with flow control on all ports
- MAC addresses: 1,024
- Memory bandwidth: 32 Gbps
- Typical latency
 - 3 μS for 1000 Mbps
 - 5 μS for 100 Mbps
 - 16 μS for 10 Mbps
- Jumbo frames: up to 10K
- Ethernet isolation: 1,500 Vrms 1 minute

RJ45 Copper Ports

- 3 RJ45 ports fully IEEE 802.3 compliant
- Speed (10/100/1000) and duplex settings (full or half): auto-detecting
- Auto-MDI/MDIX-crossover automatically supports either straight or crossed cables
- Auto-polarity for automatic correction of crossed TD and RD pairs

SFP Ports

- 2 SFP (pluggable) ports accept mini-GBIC transceivers with speeds up to 1,000 Mbps
- See separate datasheet for fiber transceiver specifications

Power Input

- Redundancy: dual power input terminals with reverse polarity protection
- Power input
 - 10-44 VDC with no PoE output
 - 45-52 VDC for PoE output
- Switch power consumption (without PoE)
 - 6.2 W (with 2 fiber) typical
 - Typical is with all ports active at 1000 Mbps
- PoE power consumption: up to 15.4 W per port
- Max. power consumption (with PoE)
 - 53 W with 3 fully loaded PoE ports
- Transient protection: 15,000 watts peak
- Spike protection: 5,000 watts (10 times for 10 μS)

PoE Output (Ports 1-3)

- PoE compliance: 100% IEEE 802.3af compliant
- PoE classification: PSE (Power Sourcing Equipment)
- PoE voltage: 45 to 48 VDC depending on power input
- PoE power: up to 15.4 watts per channel
- PoE RJ45: pin assignments TX/V- (3, 6); RX/V+ (1, 2)
- PoE operation: automatic detection and power management
- PoE disconnect mode: AC disconnect
- PoE protection: over-temperature, over-current, over/under-voltage and transient

Standards & Compliance

- Standards: IEEE 802.3, 802.3u, 802.3x
- Electrical safety: UL508, CSA C22.2/14; EN61010-1, CE
- EMC: FCC part 15, ICES-003; EN610006-2/4, CE
- Hazardous locations: ISA 12.12.01, CSA C22.2/213 (Class I, Div 2); EN60079-15 (Zone 2; Category 3), CE (ATEX)
- Marine/maritime/offshore compliance
- MTBF: >2MM hours GB @ 40°C per MIL-HNDBK-217F2
- RoHs and WEEE compliant

Environmental

- Operating temperature: -40° to +85°C
- Cold startup: -40°C
- Storage temperature: -40° to +85°C
- Humidity: 5 to 95% RH (non-condensing; conformal coating optional)
- Shock and vibration: IEC60068-2-6 and -27
- Maximum Operating Altitude: 30,000 ft.

Mechanical

- Material: corrosion-resistant aluminum
- Ingress protection: IP40
- Mounting: DIN-rail or direct-to-panel
- Weight: 15.2 oz (0.43 kg)
- Dimensions: 3.82" x 1.77" x 5.26" (9.71cm x 4.48cm x 13.37cm)

Warranty

- 5 years on design and manufacturing defects

All specifications are subject to change. Contact Sixnet to learn more.

ORDER GUIDE

PART NUMBER	DESCRIPTION
SLX-5EG-2SFP	5 ports, unmanaged 3GE RJ45 PoE + 2 GE SFP ports
FMFIBER-SFP-4K	100 Mbps SFP fiber transceiver, multimode, 4 km
FSFIBER-SFP-30K	100 Mbps SFP fiber transceiver, singlemode, 30 km
FSFIBER-SFP-60K	100 Mbps SFP fiber transceiver, singlemode, 60 km
FSFIBER-SFP-100	100 Mbps SFP fiber transceiver, singlemode, 100 km
GMFIBER-SFP-500	Gigabit SFP fiber transceiver, multimode, 550 m
GMFIBER-SFP-2K	Gigabit SFP fiber transceiver, multimode, 2 km
GSFIBER-SFP-10K	Gigabit SFP fiber transceiver, singlemode, 10 km
GSFIBER-SFP-30K	Gigabit SFP fiber transceiver, singlemode, 30 km
GSFIBER-SFP-50K	Gigabit SFP fiber transceiver, singlemode, 50 km
GSFIBER-SFP-80K	Gigabit SFP fiber transceiver, singlemode, 80 km



www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

**Europe
Middle East
Africa**
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron® and Sixnet®. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0212 102115 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.