



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SLX-8ES-6/7 Ethernet Switch

Sixnet Networking Series



▶▶▶ Three Fiber Industrial Ethernet Unmanaged Switch

The SLX-8ES-6/7 is an 8 port industrial Ethernet unmanaged switch featuring 3 noise-immune Fiber optic ports. This ruggedized switch is industrial hardened to provide superior reliability for long term operation. They require no user setup and immediately start operating as soon as you power them up.

PRODUCT HIGHLIGHTS

- Three 100 Mbps fiber optic ports for noise immune links up to 120 km
- Slim packaging fits on your DIN rail
- High performance and value
- Truly industrial hardened design
- Dual power inputs keeps you running
- Plug & play saves you time and money

REAL-TIME OPERATION

- Intelligent routing - No collisions!
- Ideal for any 10/100 Ethernet system

PLUG AND PLAY SIMPLICITY

- Auto-sensing for speed and duplex
- Auto-mdi/mdix-crossover and auto-polarity

TROUBLE FREE OPERATION

- Ultra-reliable 1,000,000+ hours MTBF
- -40 to +85°C operating range
- UL, CSA (CUL), CE and Hazloc (Zone 2) rated
- Dual power inputs with spike/surge protection
- Rugged corrosion-resistant aluminum case
- DIN rail or direct panel mounting in multiple positions – No accessories required!



**FIVE 10/100 RJ45 AND
THREE FAST ETHERNET
FIBER OPTIC PORTS**

SIXNET KNOWS INDUSTRIAL –

We have been designing industrial hardware such as Remote Terminal Units for over 30 years and have used this expertise to design the toughest Ethernet switches on the market. Don't trust your critical communications to so-called industrial hardware from commercial switch manufacturers. SIXNET switches give you proven assurance that your system will keep running for years to come.

SLX-8ES-6/7 Specifications

ETHERNET PERFORMANCE

- Unmanaged with 8 Ethernet ports
- Ethernet switch type: Intelligent store and forward wire speed
- Ethernet protocols supported: All IEEE 802.3
- RJ45 ports (shielded): 10/100BaseTX
- RJ45 speed (10 or 100 Mbps): Auto-negotiation
- RJ45 MDI/MDIX and TD/RD: Auto-crossover and auto-polarity
- Fiber optic port speed: 100BaseFX (100 Mbps)
- Fiber optic port wavelength: 1300 nm center
- Fiber multimode (mm) typical: 50 or 62.5/125 um (SC or ST)
- Fiber singlemode (sm) typical: 9 or 10/125 um (SC or ST)
- Fiber max. distance (full duplex) (see web for details) 4 km (mm), 20 (sm) or 40 km (long haul) or more (contact SIXNET)
- See separate datasheet for complete fiber transceiver details.
- Typical latency for 100M ports
 - 5 us + frame time
 - Varies on load
- Typical latency for 10M ports
 - 16 us + frame time
 - Varies on load
- Fiber duplex operation: Full duplex
- MAC addresses supported: 1024
- Memory bandwidth: 3.2 Gbps
- Ethernet isolation: 1500 VRMS 1 minute

ETHERNET COMPLIANCE

- IEEE 802.3 (10Mbps Ethernet supports legacy devices)
- IEEE 802.3u (Fast Ethernet 100Mbps for newer devices)
- IEEE 802.3x (Full-Duplex with Flow Control)

POWER INPUT

- Redundant input terminals
- Input power consumption: 8.0 W (typical w/ all ports active)
- Power input voltage: 10-30 VDC
 - Transient protection: 15,000 watts peak
 - Spike Protection: 5,000 watts (10 times for 10 us)

ENVIRONMENTAL

- Operating temperature range
 - -40 to +75 °C
 - cold startup @ -40°C
- Storage temperature range:-40 to +85 °C
- Humidity (non-condensing):
 - 5 to 95% RH
 - Conformal coating is available – contact SIXNET
- Vibration: IEC68-2-6
- Maximum Operating Altitude: 30,000 ft.

STANDARD COMPLIANCE


- Electrical safety - UL508/CSA C22.2/14, EN61010-1, CE
- EMC - FCC part 15, ICES-003, EN55022, EN61000-6, CE
- Hazardous locations: UL 1604/CSA C22.2/213 (Class I, Div. 2); EN60079-15 (Zone 2, Category 3), CE (ATEX)
- Maritime rated for marine & offshore per ABS
- Eye safety (fiber models) - IEC60825-1, Class 1; FDA 21 CFR 1040.10 and 1040.11

PHYSICAL

- DIN rail or direct panel mounting
- Packaging: Aluminum with IP40 protection
- Weight: 11 oz. (0.31kg)
- Dimensions – see mechanical diagram

All specifications are subject to change. Consult factory for latest info.

MECHANICAL DRAWING

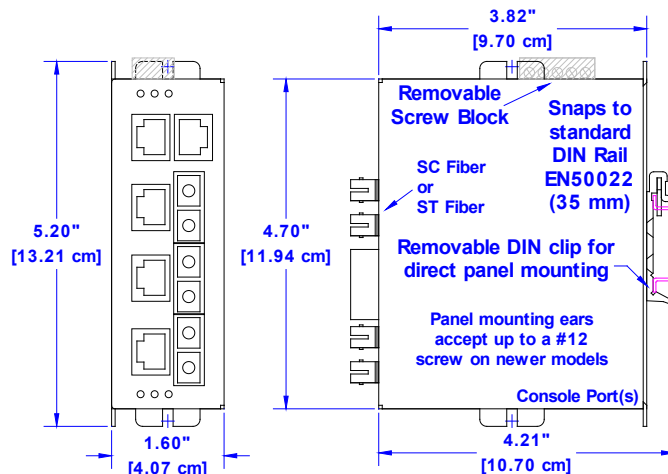

See the User Manual for a More Detailed Diagram

ORDERING GUIDE

- SLX-9ES-###** See separate datasheets for unmanaged slim line models with only 1 fiber optic port
- SLX-8ES-6SC** Unmanaged with 5 RJ45 ports & 3 multimode fiber optic port with SC or ST style connector
- SLX-8ES-6ST** Unmanaged with 5 RJ45 ports & 3 multimode fiber optic port with SC or ST style connector
- SLX-8ES-7SC** Unmanaged with 5RJ45 ports & 3 singlemode fiber optic port with SC or ST style connector
- SLX-8ES-7ST** Unmanaged with 5RJ45 ports & 3 singlemode fiber optic port with SC or ST style connector

Special, mixed or long haul (up to 120km) fiber transceivers are available for special order. Contact Sixnet for details.

ACCESSORIES:

- ET-PS-024-02** Industrial power supply – AC to 24VDC, 2A, with compact packaging, DIN rail mount
- SP-ETH-2** Dual port surge & lightning protector



www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

**Europe
Middle East
Africa**
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

ADLD0213 041615 ©2015 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.