



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Solder Paste No-Clean Sn42/Bi57.6/Ag0.4 in 10cc Syringe 35g T4 Mesh

### Product Highlights

Printing speeds up to 100mm/sec  
Long stencil life  
Wide process window  
Clear residue  
Low voiding  
Excellent wetting compatibility on most board finishes  
Dispense grade  
Compatible with enclosed print heads  
RoHS II and REACH compliant

### Specifications

|                      |                                                                    |
|----------------------|--------------------------------------------------------------------|
| Alloy:               | Sn42/Bi57.6/Ag0.4                                                  |
| Mesh Size:           | T4                                                                 |
| Micron (µm) Range:   | 20-38                                                              |
| Flux Type:           | Synthetic No-Clean                                                 |
| Flux Classification: | RELO                                                               |
| Metal Load:          | 87% Metal by Weight                                                |
| Melting Point:       | 138°C (281°F)                                                      |
| Packaging:           | 10cc/35g Syringe                                                   |
| Shelf Life:          | Refrigerated >6 months, Unrefrigerated >2 months *See notes below: |

\*Shelf Life Notes: Chip Quik® solder paste is good past its quoted shelf life, regardless of refrigeration. Before use, visually inspect the solder paste to ensure it is not dried out or clumpy, or check stencil release. If stored in a jar, stir the product thoroughly for 2-3 minutes before inspection and use.

Chip Quik® solder paste is manufactured using Made in USA high quality synthetic flux and precision atomized metal powder. Chip Quik® solder paste is guaranteed for 12 months from date of manufacture, regardless of refrigeration. If you have any issues with our solder paste, please contact Chip Quik® directly for no charge warranty replacement. Please retain original bill of sale, and solder paste in original container as we may request its return for internal R&D testing purposes.

### Printer Operation

Print Speed: 25-100mm/sec  
Squeegee Pressure: 70-250g/cm of blade  
Under Stencil Wipe: Once every 10-25 prints, or as necessary

### Stencil Life

>8 hours @ 20-50% RH 22-28°C (72-82°F)  
>4 hours @ 50-70% RH 22-28°C (72-82°F)

### Stencil Cleaning


Automated stencil cleaning systems for both stencil and misprinted boards. Manual cleaning using isopropyl alcohol (IPA).

### Storage and Handling

Refrigerate at 3-8°C (37-46°F). Do not freeze. Allow 4 hours for solder paste to reach an operating temperature of 20-25°C (68-77°F) before use.

## Recommended Profile

Reflow profile for Sn42/Bi57.6/Ag0.4 solder assembly, designed as a starting point for process optimization.

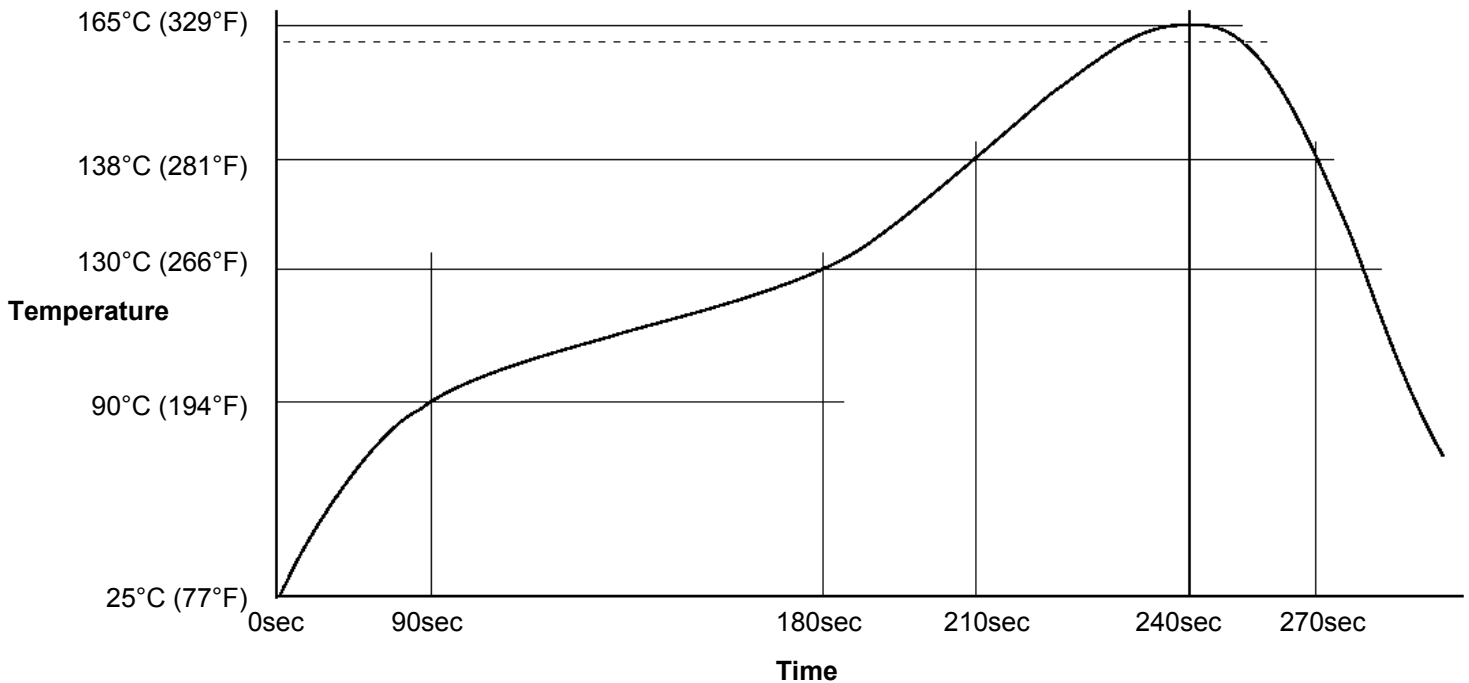

## Test Results

| Test J-STD-004 or other requirements as stated            | Test Requirement                                   | Result                                                                                             |
|-----------------------------------------------------------|----------------------------------------------------|----------------------------------------------------------------------------------------------------|
| Copper Mirror                                             | IPC-TM-650: 2.3.32                                 | L: No breakthrough                                                                                 |
| Corrosion                                                 | IPC-TM-650: 2.6.15                                 | L: No corrosion                                                                                    |
| Quantitative Halides                                      | IPC-TM-650: 2.3.28.1                               | L: <0.5%                                                                                           |
| Electrochemical Migration                                 | IPC-TM-650: 2.6.14.1                               | L: <1 decade drop (No-clean)                                                                       |
| Surface Insulation Resistance 85°C, 85% RH @ 168 Hours    | IPC-TM-650: 2.6.3.7                                | L: ≥100MΩ (No-clean)                                                                               |
| Tack Value                                                | IPC-TM-650: 2.4.44                                 | 48g                                                                                                |
| Viscosity – Malcom @ 10 RPM/25°C (x10 <sup>3</sup> mPa/s) | IPC-TM-650: 2.4.34.4                               | Print: 125-180, Dispense: 90-130                                                                   |
| Visual                                                    | IPC-TM-650: 3.4.2.5                                | Clear and free from precipitation                                                                  |
| Conflict Minerals Compliance                              | Electronic Industry Citizenship Coalition (EICC)   | Compliant                                                                                          |
| REACH Compliance                                          | Articles 33 and 67 of Regulation (EC) No 1907/2006 | Contains no substance >0.1% w/w that is listed as a SVHC or restricted for use in solder materials |

## Conforms to the following Industry Standards:

|                                                                             |     |
|-----------------------------------------------------------------------------|-----|
| J-STD-004B, Amendment 1 (Solder Fluxes):                                    | Yes |
| J-STD-005A (Solder Pastes):                                                 | Yes |
| J-STD-006C, Amendments 1 & 2 (Solder Alloys and Fluxed/Non-Fluxed Solders): | Yes |
| RoHS 2 Directive 2011/65/EU:                                                | Yes |