



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

# Chip LEDs with reflectors


## SML-010 Series

The SML-010 series are high luminance chip LEDs with reflectors. The compact and leadless design of these LEDs allows for high mounting density.

### ●Features

- 1) Reflectors are used to achieve a high luminance.
- 2) Four colors : red, orange, yellow and green.
- 3) Rectangular and leadless (3x2mm)
- 4) Can be mounted by automatic mounting.

### ●External dimensions (Units : mm)

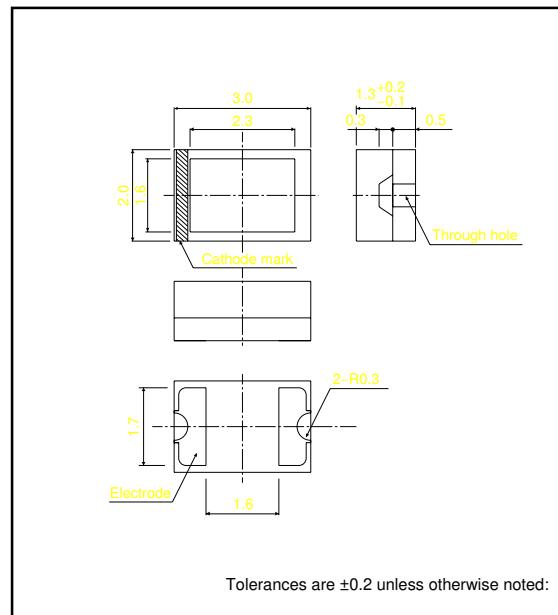

### ●Selection guide

Emitting color \ Lens	Red	Orange	Yellow	Green
Lens	SML-010LT	SML-010DT	SML-010YT	SML-010MT
Transparent clear	SML-010VT	-	-	SML-010FT
	-	-	-	SML-010PT

### ●Absolute maximum ratings ( $T_a=25^\circ\text{C}$ )

Parameter	Symbol	Limits		Unit
		Bright red (L)	Other colors	
Power dissipation	$P_D$	75	70	mW
Forward current	$I_F$	30	25	mA
Peak forward current	$I_{FP}$	75	60	mA*
Reverse voltage	$V_R$	4		V
Operating temperature	$T_{opr}$	$-30\text{~}+85$		°C
Storage temperature	$T_{stg}$	$-40\text{~}+85$		°C

\* Pulse width 1ms Duty 1 / 5

## LED lamps

●Electrical and optical characteristics ( $T_a=25^\circ\text{C}$ )

Type	Parameter	Color	Forward voltage			Reverse current		Luminous intensity			Peak wavelength		Spectral line half width	
			V <sub>F</sub> (V)		Cond.	I <sub>R</sub> ( $\mu\text{A}$ )	Cond.	I <sub>V</sub> (mcd)		Cond.	$\lambda_P$ (nm)	Cond.	$\Delta\lambda$ (nm)	Cond.
			Typ.	Max.		I <sub>F</sub> (mA)		V <sub>R</sub> (V)	Min.					
SML-010	LT	Red	1.75	2.5	20	100	4	5.6	16.0	20	660	20	25	20
	VT	Red	2.0	2.8	20	100	4	2.2	6.3	20	650	20	40	20
	DT	Orange	2.0	2.8	20	100	4	3.6	10.0	20	610	20	40	20
	YT	Yellow	2.1	2.8	20	100	4	2.2	6.3	20	585	20	40	20
	MT	Green	2.2	2.8	20	100	4	5.6	25.0	20	570	20	40	20
	FT	Green	2.2	2.8	20	100	4	3.6	10.0	20	560	20	40	20
	PT	Green	2.2	2.8	20	100	4	2.2	6.3	20	555	20	40	20

## ●Directional pattern

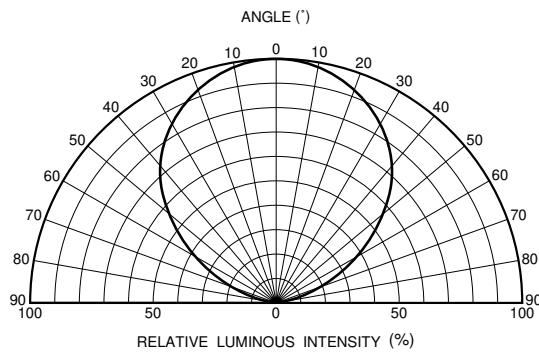


Fig.1 Directional pattern

## ●Electrical characteristics curves 1 (SML-010LT) (bright red)

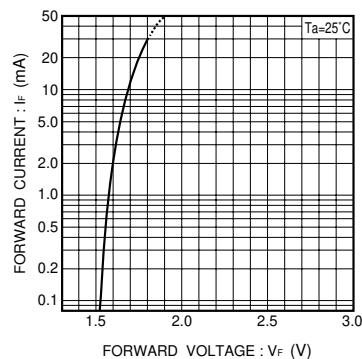


Fig.2 Forward current vs. forward voltage

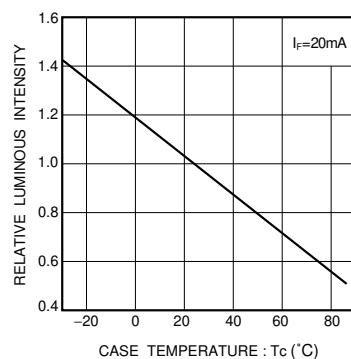


Fig.3 Luminous intensity vs. case temperature

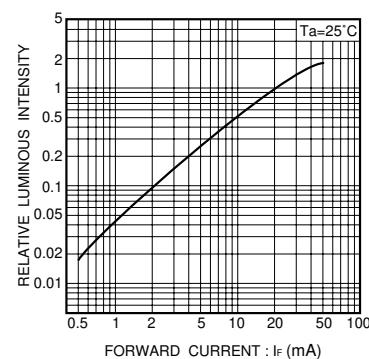


Fig.4 Luminous intensity vs. forward current

## SML-010 Series

### LED lamps

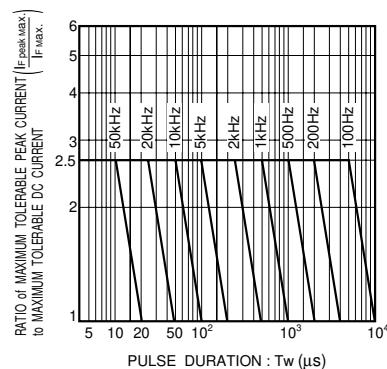


Fig.5 Maximum tolerable peak current vs. pulse duration

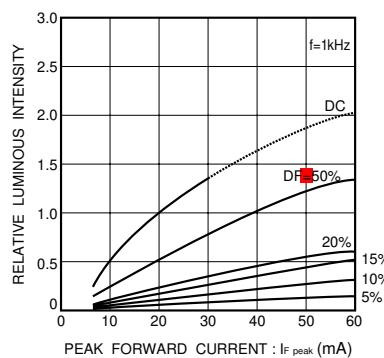


Fig. 6 Luminous intensity vs. peak forward current

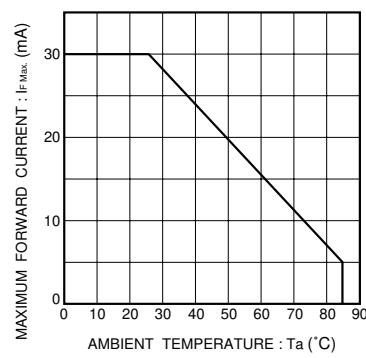


Fig. 7 Maximum forward current vs. ambient temperature (Derating)

### ●Electrical characteristics curves 2 (SML-010VT) (red)

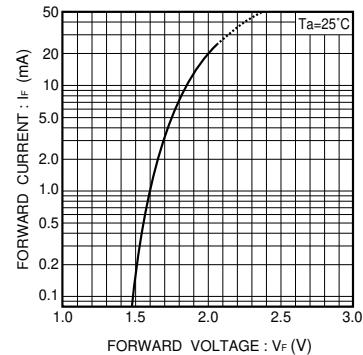


Fig.8 Forward current vs. forward voltage

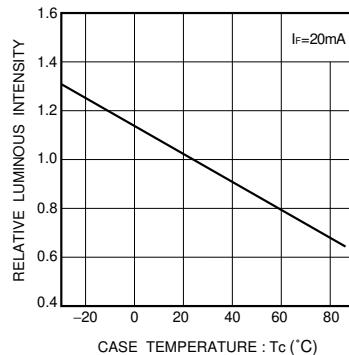


Fig.9 Luminous intensity vs. case temperature

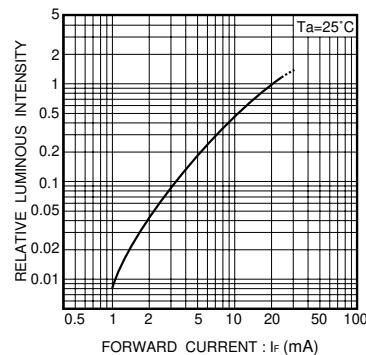


Fig.10 Luminous intensity vs. forward current

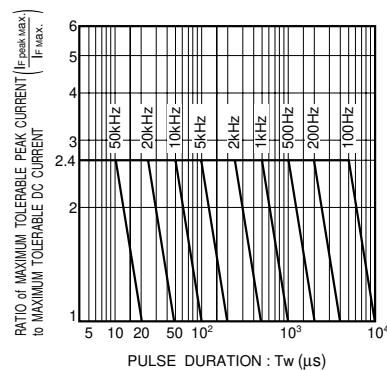


Fig.11 Maximum tolerable peak current vs. pulse duration

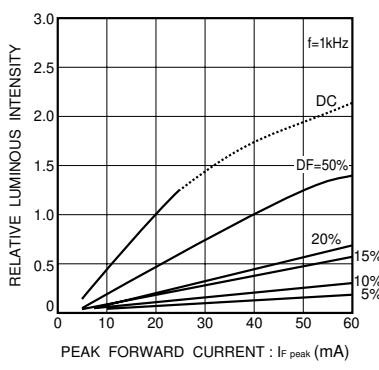


Fig.12 Luminous intensity vs. peak forward current

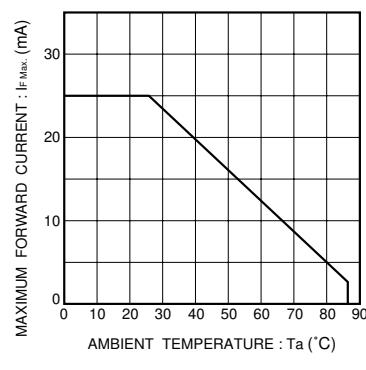


Fig.13 Maximum forward current vs. ambient temperature (Derating)

# SML-010 Series

## LED lamps

### ● Electrical characteristics curves 3 (SML-010DT) (orange)

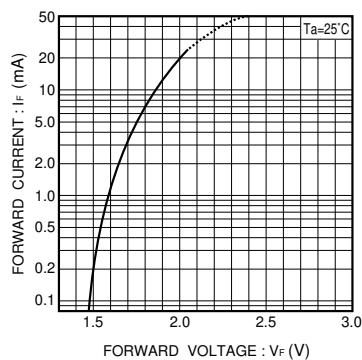


Fig.14 Forward current vs. forward voltage

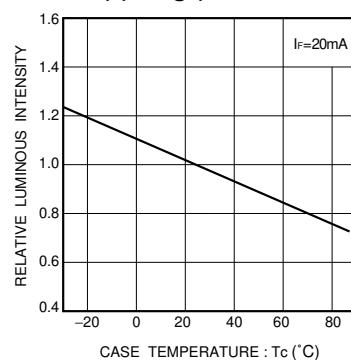


Fig.15 Luminous intensity vs. case temperature

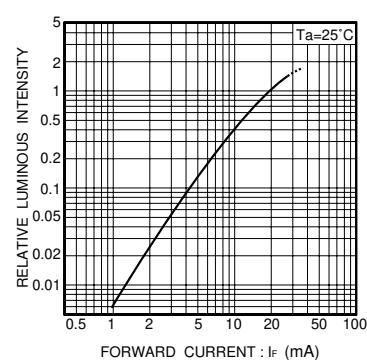


Fig.16 Luminous intensity vs. forward current

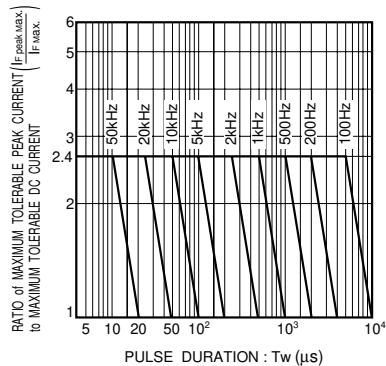


Fig.17 Maximum tolerable peak current vs. pulse duration

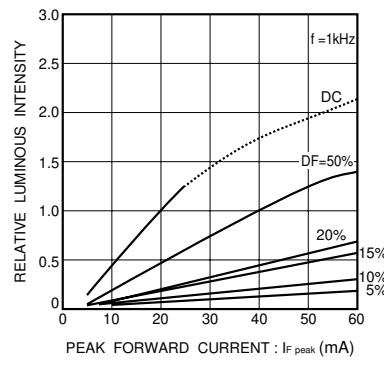


Fig.18 Luminous intensity vs. peak forward current

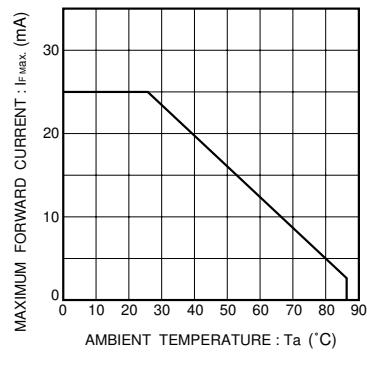


Fig.19 Maximum forward current vs. ambient temperature (Derating)

### ● Electrical characteristics curves 4 (SML-010YT) (yellow)

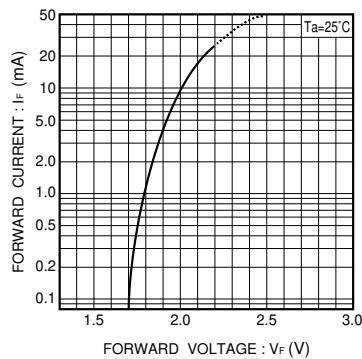


Fig.20 Forward current vs. forward voltage

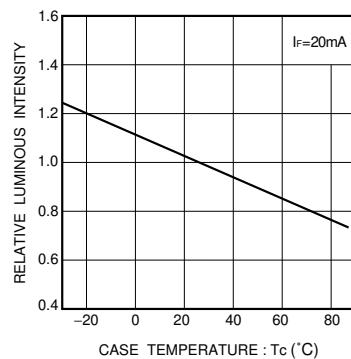


Fig.21 Luminous intensity vs. case temperature

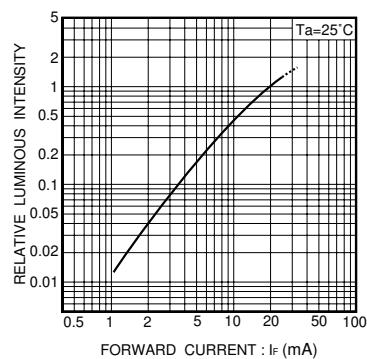


Fig.22 Luminous intensity vs. forward current

## SML-010 Series

### LED lamps

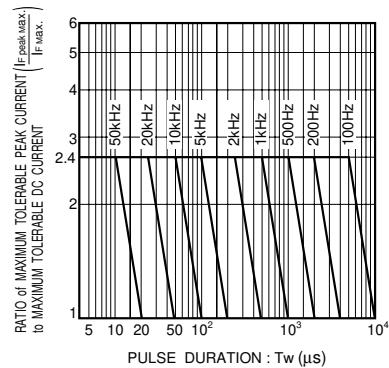


Fig.23 Maximum tolerable peak current vs. pulse duration

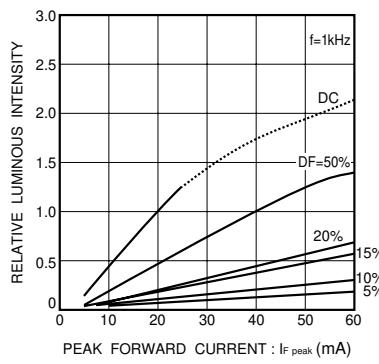


Fig.24 Luminous intensity vs. peak forward current

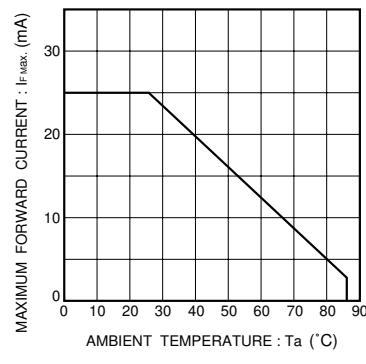


Fig.25 Maximum forward current vs. ambient temperature (Derating)

#### ●Electrical characteristics curves 5 (SML-010MT, SML-010FT, SML-010PT) (green)

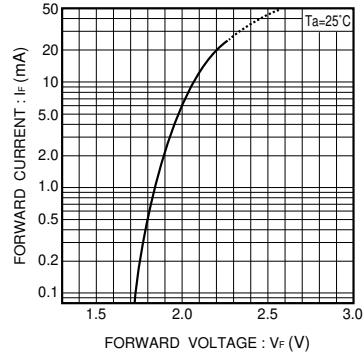


Fig.26 Forward current vs. forward voltage

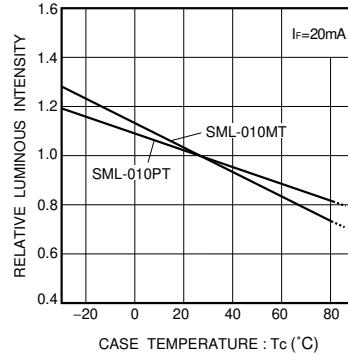


Fig.27 Luminous intensity vs. case temperature

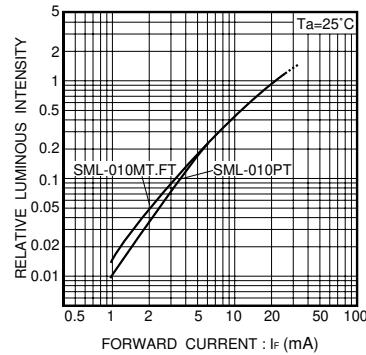


Fig.28 Luminous intensity vs. forward current

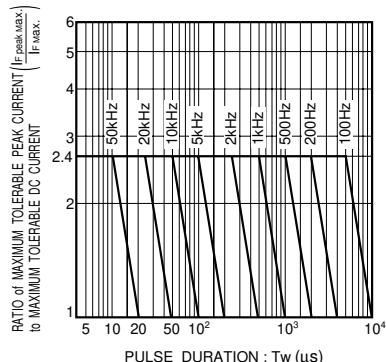


Fig.29 Maximum tolerable peak current vs. pulse duration

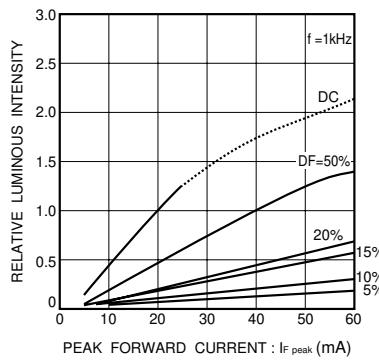


Fig.30 Luminous intensity vs. peak forward current

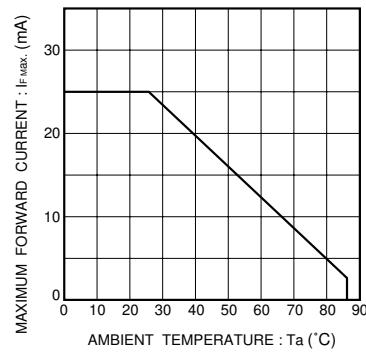


Fig.31 Maximum forward current vs. ambient temperature (Derating)