



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Two-color chip LEDs with reflectors


SML-020 Series

The SML-020 series are two-color, high luminance chip LEDs with reflectors. Two-color chips are built into a single package. These LEDs are compact and leadless to allow a high mounting density.

●Features

- 1) Reflectors are used to achieve a high luminance.
- 2) Two-color emission, rectangular and leadless (3×2.5 mm).
- 3) Can be mounted by automatic mounting.
- 4) Available on tape

●External dimensions (Units : mm)

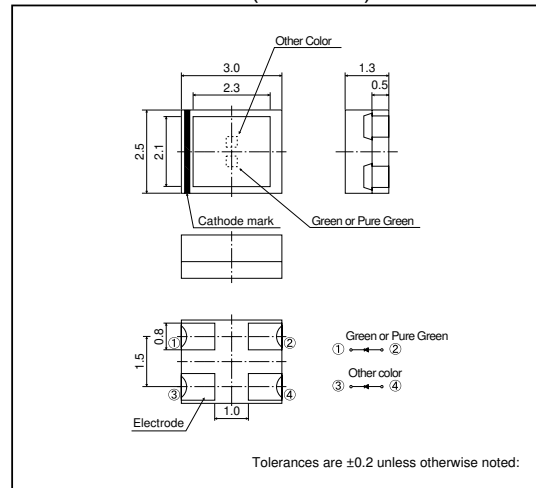

●Selection guide

Emitting color Lens	Red Green	Orange Green	Yellow Green	Orange Pure Green
	Transparent clear	SML-020MVT SML-020MLT	SML-020MDT	SML-020MYT

●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits					Unit
		MLT	MVT	MDT	MYT	PDT	
Power dissipation	P_D	60	←	←	←	←	mW/chip
Forward current	I_F Other Color	30	25	←	←	←	mA
	I_F Green	25					
Peak forward current	I_{FP} Other Color	75	60	←	←	←	mA*
	I_{FP} Green	60					
Reverse voltage	V_R	4	←	←	←	←	V
Operating temperature	T_{opr}	-30~+85	←	←	←	←	°C
Storage temperature	T_{stg}	-40~+85	←	←	←	←	°C

* Pulse width 1ms Duty 1 / 5

Light Emitting Diodes

●Electrical and optical characteristics (Ta=25°C)

Type	Parameter	Color	Forward voltage			Reverse current			Luminous intensity			Peak wavelength		Spectral line half width	
			V _F (V)		I _R (μA)	Cond.	I _V (mcd)	Cond.	I _P (nm)	Cond.	Δλ (nm)	Cond.			
			Typ.	Max.									I _F (mA)	Max.	V _R (V)
SML-020MVT	V	Red	2.0	2.8	20	100	4	3.6	6.3	20	650	20	40	20	
	M	Green	2.2	2.8				9.0	20		570		40		
SML-020MLT	L	Red	1.75	2.5				9.0	16		660		25		
	M	Green	2.2	2.8				9.0	20		570		40		
SML-020MDT	D	Orange	2.0	2.8				5.6	10		610		40		
	M	Green	2.2	2.8				9.0	20		570		40		
SML-020MYT	Y	Yellow	2.1	2.8				3.6	6.3		585		40		
	M	Green	2.2	2.8				9.0	20		570		40		
SML-020PDT	D	Orange	2.0	2.8				5.6	10		610		40		
	P	Pure Green	2.2	2.8				2.2	4.0		555		40		

●Directional pattern

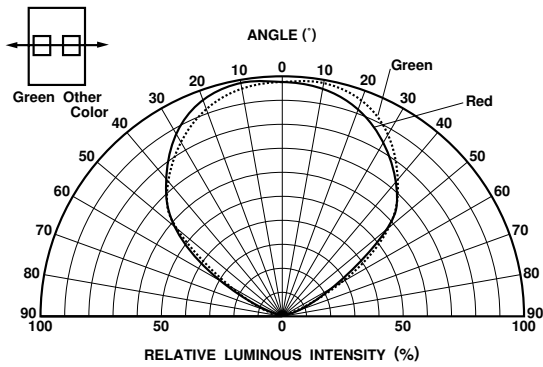


Fig. 1 Directional pattern (1)

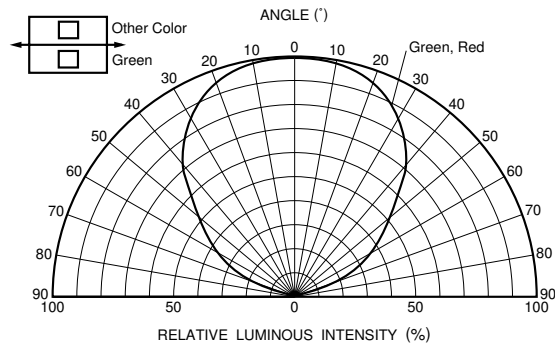


Fig. 2 Directional pattern (2)

●Electrical characteristics1 (SML-020MVT)

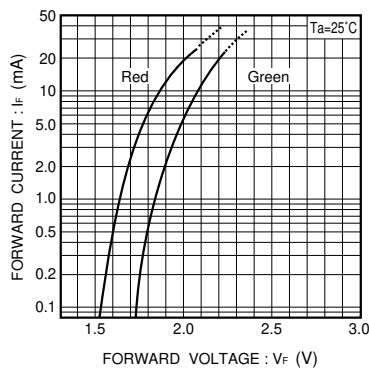


Fig. 3 Forward current vs. forward voltage

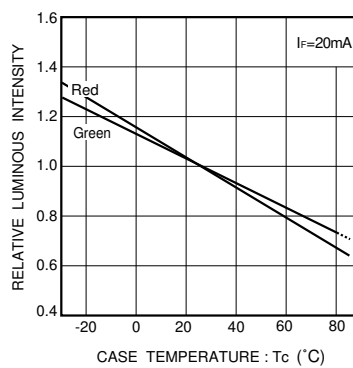


Fig. 4 Luminous intensity vs. case temperature

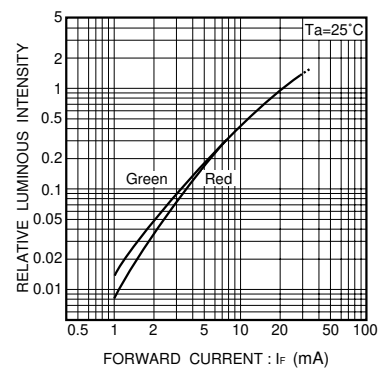


Fig. 5 Luminous intensity vs. forward current

Light Emitting Diodes

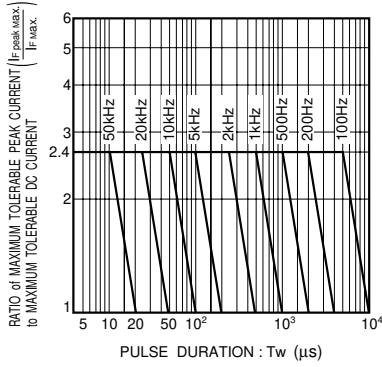


Fig. 6 Maximum tolerable peak current vs. pulse duration

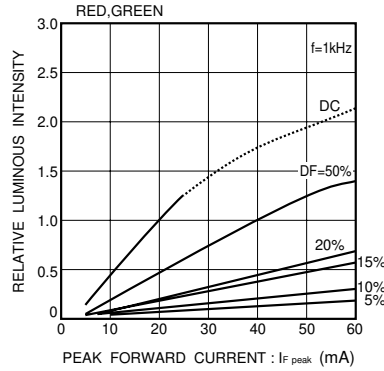


Fig. 7 Luminous intensity vs. peak forward current

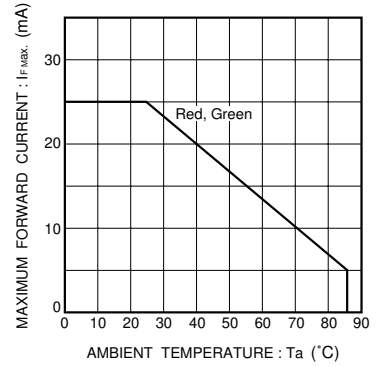


Fig. 8 Maximum forward current vs. ambient temperature

●Electrical characteristics2 (SML-020MLT)

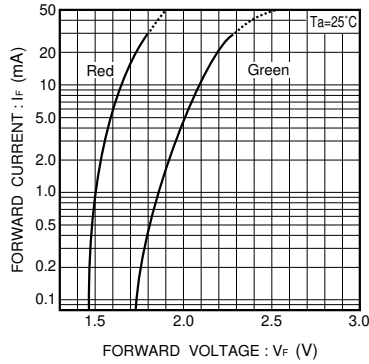


Fig. 9 Forward current vs. forward voltage

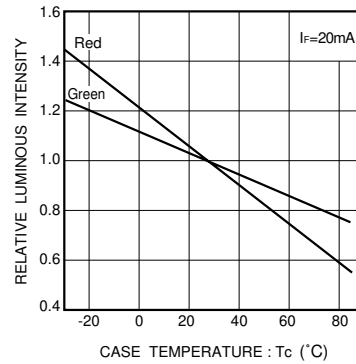


Fig. 10 Luminous intensity vs. case temperature

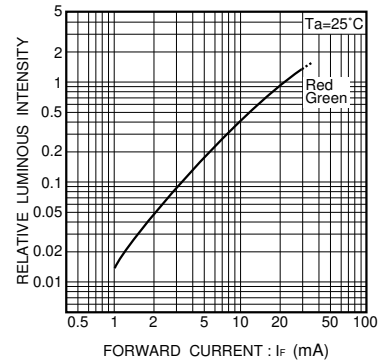


Fig. 11 Luminous intensity vs. forward current

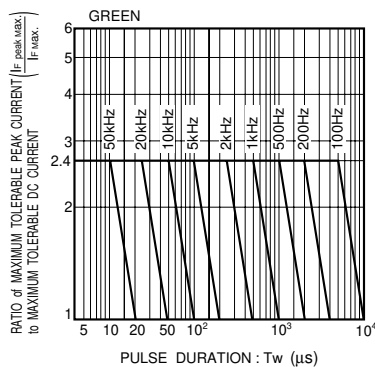


Fig. 12 Maximum tolerable peak current vs. pulse duration

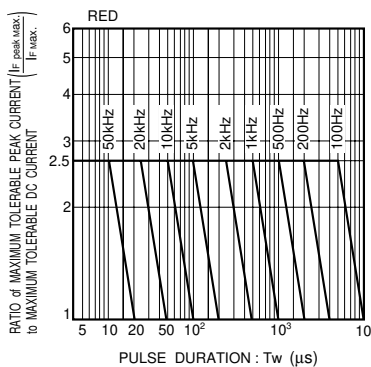


Fig. 13 Maximum tolerable peak current vs. pulse duration

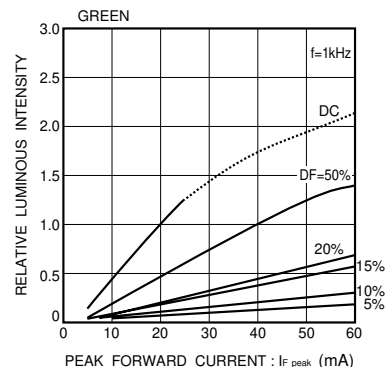


Fig. 14 Luminous intensity vs. peak forward current

Light Emitting Diodes

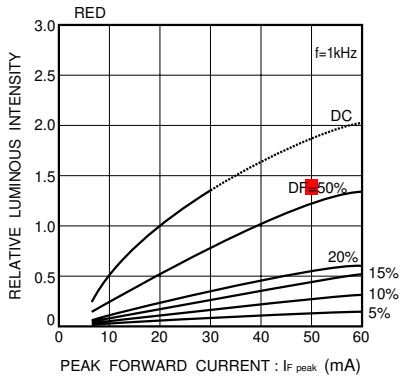


Fig. 15 Luminous intensity vs. peak forward current

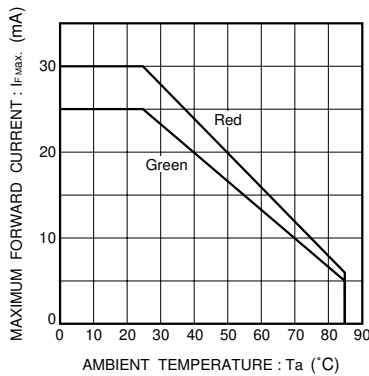


Fig. 16 Maximum forward current vs. ambient temperature

●Electrical characteristics3 (SML-020MDT)

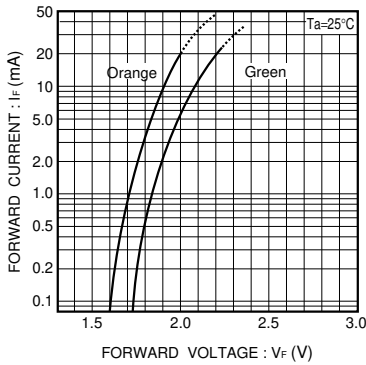


Fig. 17 Forward current vs. forward voltage

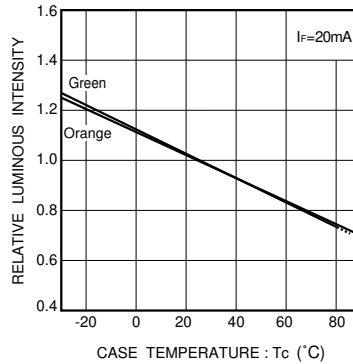


Fig. 18 Luminous intensity vs. case temperature

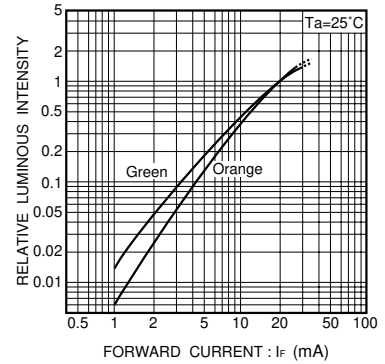


Fig. 19 Luminous intensity vs. forward current

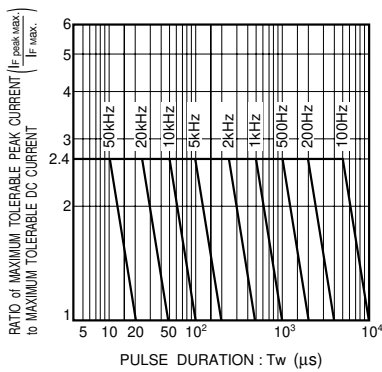


Fig. 20 Maximum tolerable peak current vs. pulse duration

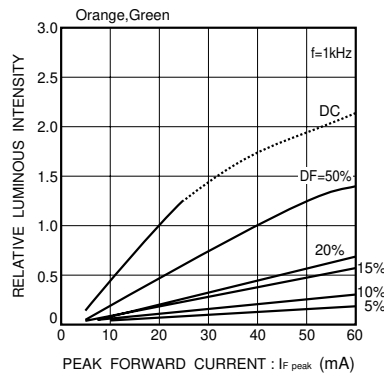


Fig. 21 Luminous intensity vs. peak forward current

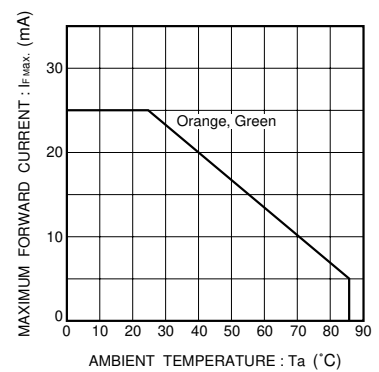


Fig. 22 Maximum forward current vs. ambient temperature

Light Emitting Diodes

●Electrical characteristics4 (SML-020MYT)

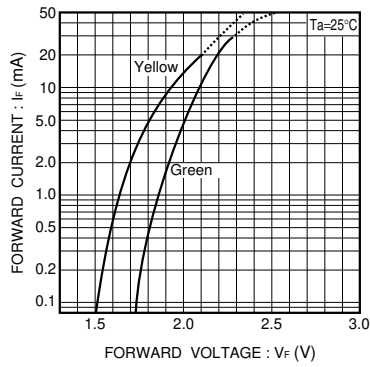


Fig. 23 Forward current vs. forward voltage

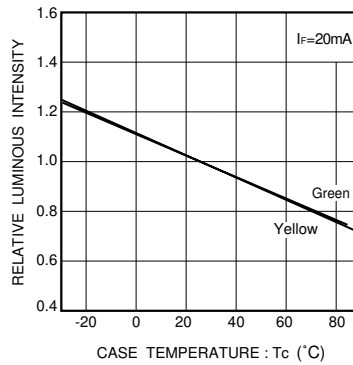


Fig. 24 Luminous intensity vs. case temperature

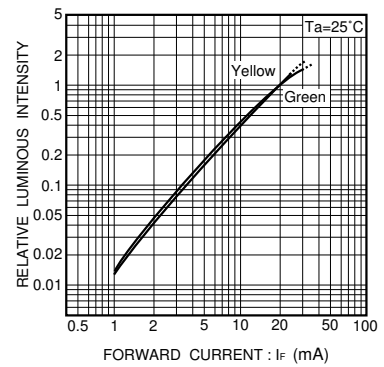


Fig. 25 Luminous intensity vs. forward current

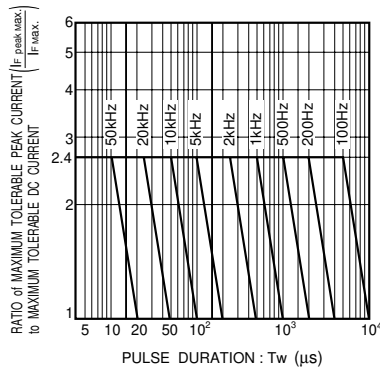


Fig. 26 Maximum tolerable peak current vs. pulse duration

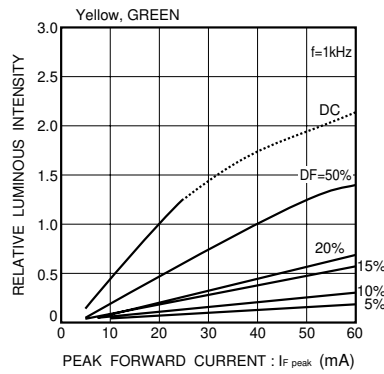


Fig. 27 Luminous intensity vs. peak forward current

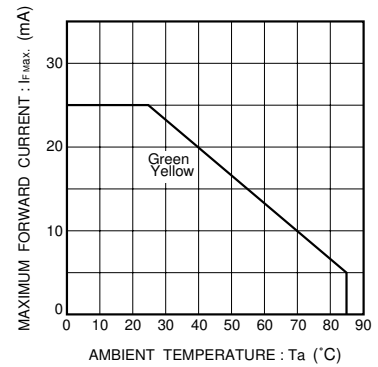


Fig. 28 Maximum forward current vs. ambient temperature

●Electrical characteristics5 (SML-020PDT)

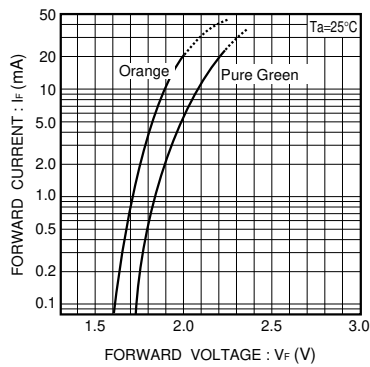


Fig. 29 Forward current vs. forward voltage

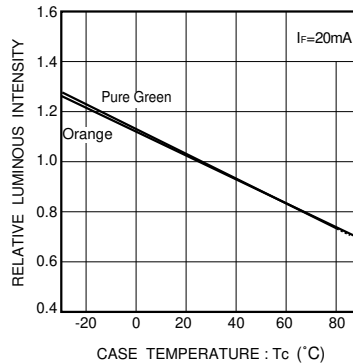


Fig. 30 Luminous intensity vs. case temperature

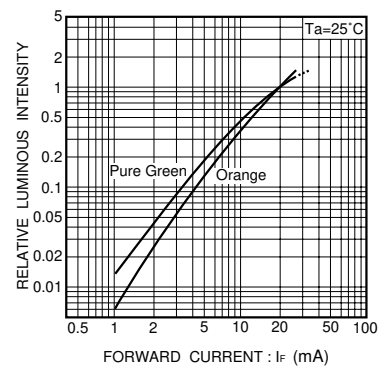


Fig. 31 Luminous intensity vs. forward current

Light Emitting Diodes

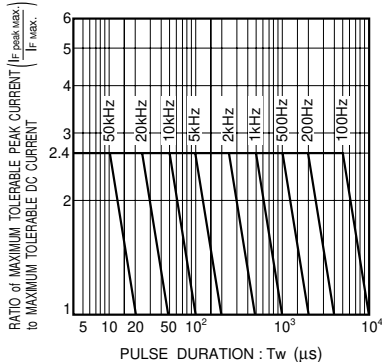


Fig. 32 Maximum tolerable peak current vs. pulse duration

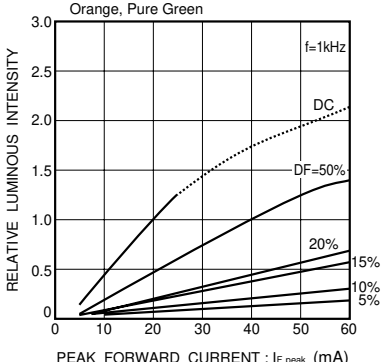


Fig. 33 Luminous intensity vs. peak forward current

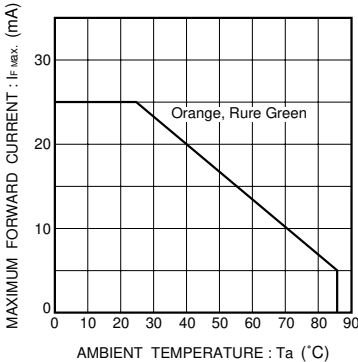


Fig. 34 Maximum forward current vs. ambient temperature