



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



IsoLoop[®]
IL711/IL610 MSOP Isolated
Switch-Mode Power Supply
Demonstration Board

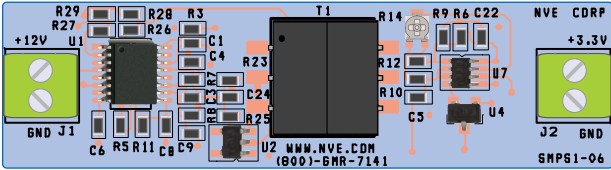

Board No.: SMPS1-01

Overview

This board demonstrates an isolated, high-efficiency synchronous buck converter switch-mode power supply (SMPS) using the world's smallest isolators, NVE IsoLoop® MSOP Isolators.

The board has three channels of isolation to ensure the output is electrically isolated from the input. A two-channel MSOP-8 isolator isolates synchronous rectification and a single-channel, failsafe, MSOP-8 isolator and simple pulse-width modulation circuitry isolates output-voltage feedback.

MSOP isolators minimize board area. Despite the compact components, the transformer, isolators, and circuit board maintain at least 3 mm creepage. Other IsoLoop versions can be used with similar circuitry to provide $2.5 \text{ kV}_{\text{RMS}}$ or $5 \text{ kV}_{\text{RMS}}$ isolation and as much as 8 mm creepage.

High speed, small size, low EMI, and high reliability make IsoLoop Isolators ideal for switch-mode power supplies. A remarkable 44000-year barrier life provides MTBFs thousands of times better than optocouplers or other solid-state isolators. Key evaluation board and isolator specifications are summarized as follows:

Evaluation Board Specifications


- Input voltage: 12 V nominal (11 V – 14 V)
- Nominal output voltage: $3.3 \pm 0.05 \text{ V}$
- Maximum output current: 750 mA
- Overcurrent protection
- Switching frequency: $\sim 130 \text{ kHz}$
- $1.2 \text{ kV}_{\text{RMS}}$ isolation / one minute per UL1577
- 85°C operating temperature
- 3 mm creepage spacing

IsoLoop Isolator Features

- 300 ps pulse width distortion for minimal deadtime
- 100 ps pulse jitter for high precision
- $50 \text{ kV}/\mu\text{s}$ transient immunity
- No carriers or internal clocks for very low EMI emissions
- 44000 year barrier life
- Package options including:
 - Ultraminiature MSOP-8 ($2.5 \text{ kV}_{\text{RMS}}$ isolation; 600 Working Voltage)
 - Industry-standard SOIC-8 ($2.5 \text{ kV}_{\text{RMS}}$ isolation; 600 Working Voltage)
 - True 8 mm creepage wide-body ($5 \text{ kV}_{\text{RMS}}$ isolation; 1000 Working Voltage)





Visit www.nve.com for IsoLoop® datasheets.

Board Layout

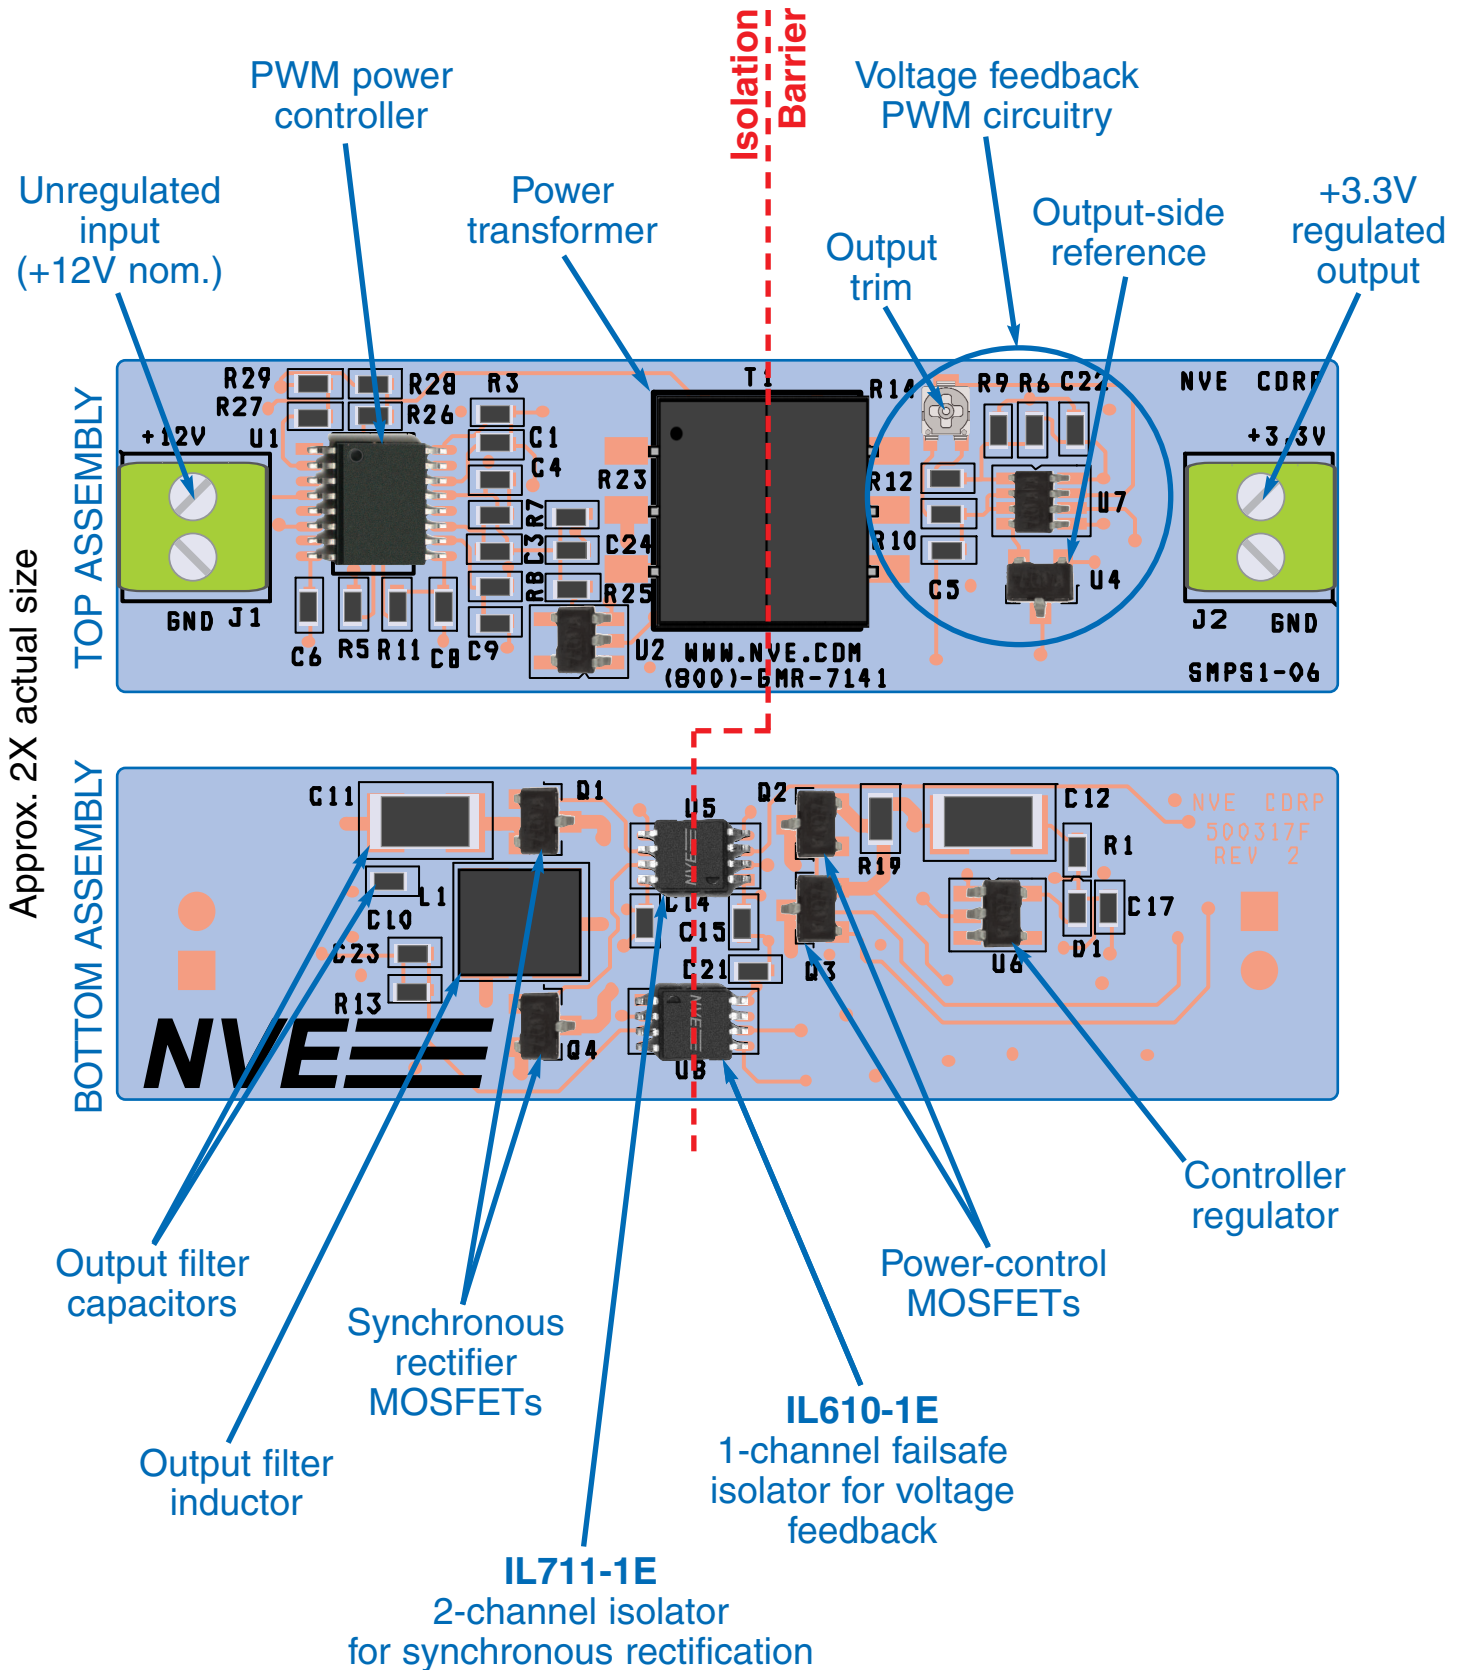

PCB Layers

Top Views
(approx. 2X actual size)

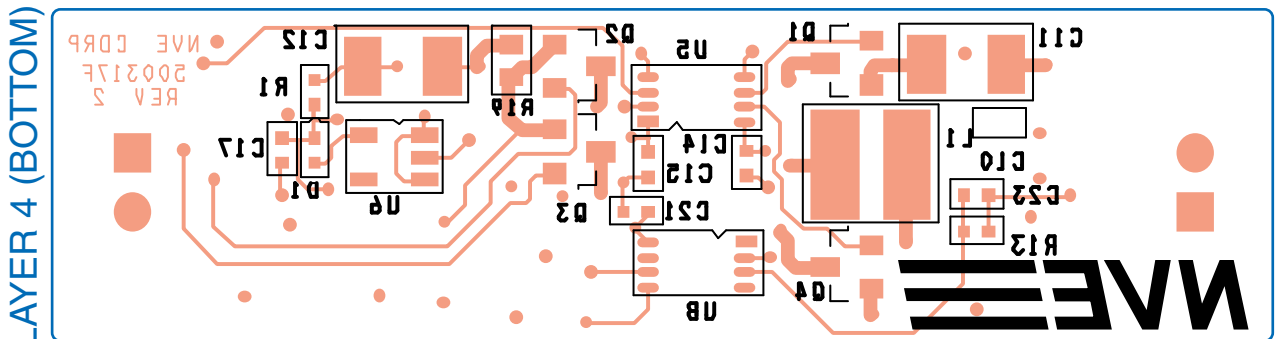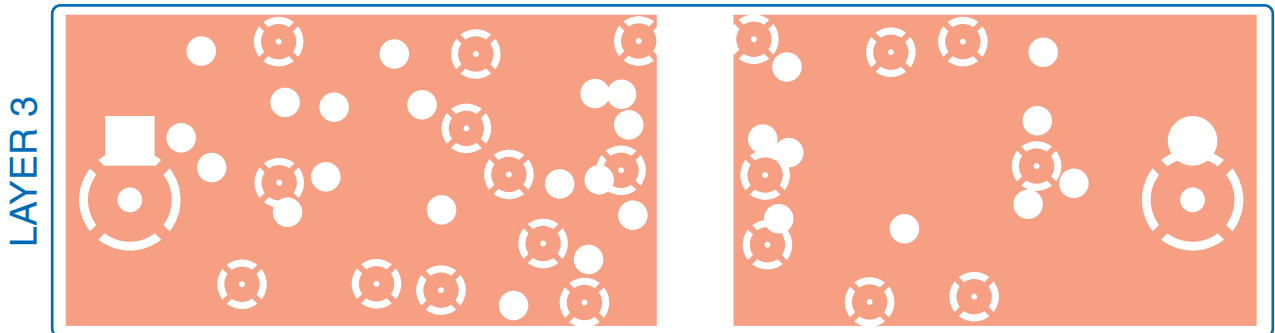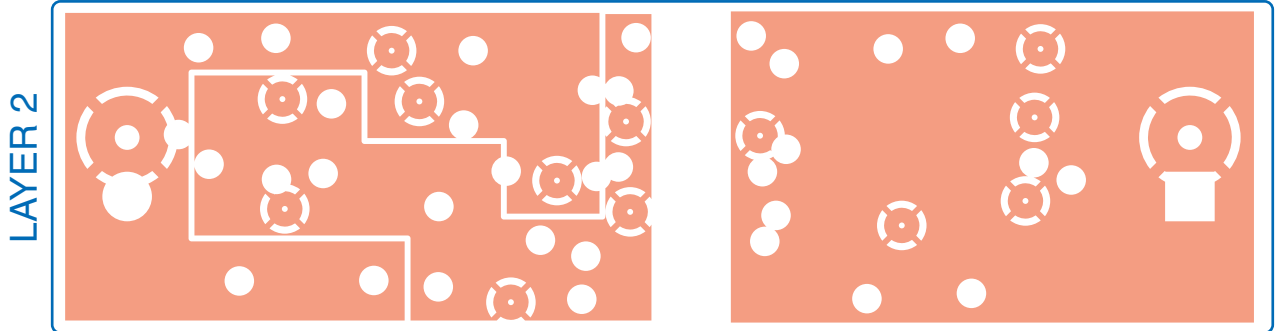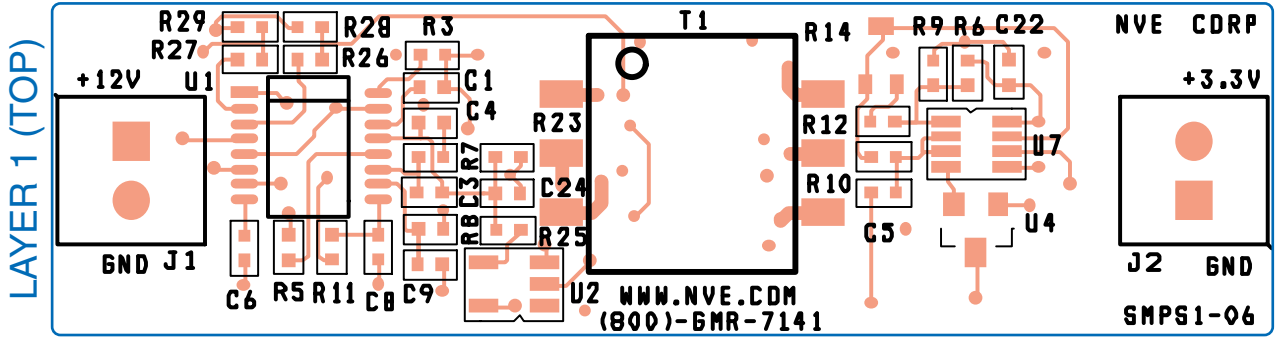

Contact iso-apps@nve.com for design files.

Bill of Materials

| Reference | Qty | Part Description | Package |
|--------------------------------------|-----|--|---------|
| C5, C23 | 2 | 47pF, 16V, 0402 | 0402 |
| C6, C8 | 2 | 270pF, 16V, 0402 | 0402 |
| C3, C9 | 2 | 1nF, 16V, 0402 | 0402 |
| C24 | 1 | .01 μ F, 16V, 0402 | 0402 |
| C1, C4 | 2 | .068 μ F, 16V, 0402 | 0402 |
| C13, C14, C15, C19, C20, C21, C22 | 7 | .1 μ F, 16V, 0402 | 0402 |
| C10, C17 | 2 | 2.2 μ F, 16V, 0402 | 0402 |
| C12 | 1 | 47 μ F, 16V, 1210 | 1210 |
| C11 | 1 | 220 μ F, 6.3V, 1210 | 1210 |
| D1 | 1 | CDSQR400B Switching Diode | 0402 |
| R19 | 1 | 0.033 Ω , 0603 | 0603 |
| R8 | 1 | 100 Ω , 0402 | 0402 |
| R13 | 1 | 390 Ω , 0402 | 0402 |
| R1 | 1 | 1.5k Ω , 0402 | 0402 |
| R28, R29 | 2 | 4.99k Ω , 0402 | 0402 |
| R3, R10, R23, R26, R27 | 5 | 10k Ω , 0402 | 0402 |
| R25 | 1 | 20k Ω , 0402 | 0402 |
| R7 | 1 | 27k Ω , 0402 | 0402 |
| R12 | 1 | 33k Ω , 0402 | 0402 |
| R5 | 1 | Optional (not factory installed) | 0402 |
| R6, R9 | 2 | 100k Ω , 0402 | 0402 |
| R11 | 1 | 300k Ω , 0402 | SMD |
| R14 | 1 | PVA2A223A01R00 22k Ω Trimmer | 0402 |
| L1 | 1 | 22 μ H, 1.5A, 1816 | 1816 |
| T1 | 1 | Transformer, 560 μ H, 8:3, Pulse Electronics PH9185.083NL | SMD |
| J1, J2 | 2 | Screw Terminal, 2 position, 0.1" | |
| Q1, Q2, Q3, Q4 | 4 | IRLML6244TRPBF MOSFET | SOT23-3 |
| U1 | 1 | Linear Tech LTC3723 EGN-2#PBF PWM Controller | SSOP-16 |
| U2 | 1 | NC7S14M5X Invertor | SOT23-5 |
| U4 | 1 | ISL21010DFH312Z-TK 1.25V Ref | SOT23-3 |
| U5 | 1 | IL711-1E 2-channel MSOP Isolator | MSOP-8 |
| U6 | 1 | TI LP2985-10DBVR Regulator | SOT23-5 |
| U7 | 1 | TLV3502AQDCNRQ1 Dual Comp | SOT23-8 |
| U8 | 1 | IL610-1E Passive-Input Isolator | MSOP-8 |
| SMPS1-06 | 1 | PCB | |

Circuit Description

Circuit Overview

The demonstration circuit has three main sections: power control, synchronous rectification, and voltage control. The power control section modulates power to the primary of the transformer. The synchronous rectification section uses synchronously-switched MOSFETs to provide a DC output from the transformer secondary. Finally, the voltage control section controls the output by feeding back a pulse-width modulated signal corresponding to the output voltage. The board has three channels of isolation to provide an electrically isolated output.

Power Control

The PWM Controller (U1) varies the duty cycle of two push-pull power-control MOSFETs (Q2 and Q3), to regulate to the desired output. The controller oscillator frequency is set by C6, in this case to around 260 kHz. The switching frequency for the push-pull and synchronous rectifier MOSFETs is half the controller frequency (roughly 130 kHz). The transformer (T1) transfers power to the secondary while maintaining isolation. The formulas for approximate switching frequency are:

$$f_{U1.8} \approx \frac{1}{(14 \text{ k}\Omega)(C6)} \quad f_{\text{SWITCH}} \approx \frac{1}{(28 \text{ k}\Omega)(C6)}$$

Powering the controller

At least 10.7 V ($V_{UVLO(MAX)}$) on V_{CC} is required for Controller start-up. Once the Controller is running, a minimum 7 V, maximum 10 V supply is needed for operation. In this circuit, a “trickle charge” through resistor R1 starts the controller. Diode D1 allows V_{CC} to go above the 10 V regulator (U6) output as required for start-up. After the Controller’s start-up cycle, its power consumption increases, so V_{CC} drops. When V_{CC} drops below approximately 9.3 V, U6 begins supplying Controller power. D1 also drops the regulator output below the 10 V absolute maximum supply to the Controller from a low-impedance source, even if the regulator is at the high end of its output specification. The minimum input voltage is a function of the Controller minimum start-up supply, Controller start-up current, and R1:

$$V_{IN(MIN)} = V_{CCUV(MAX)} + (I_{CCST(MAX)})(R1); \quad V_{CCUV(MAX)} = 10.7 \text{ V}; \quad I_{CCST(MAX)} = 250 \mu\text{A}$$

The 1.5k Ω value for R1 allows a minimum input voltage of 11.1 V. A larger resistor increases the minimum input voltage; a lower value decreases efficiency by dissipating more power. This demonstration board has a maximum input voltage maximum input voltage of 16 V, which is limited by the maximum U6 input.

In some SMPS designs, controller operating power is provided by an auxiliary transformer winding. This avoids a controller regulator at the expense of a more complicated transformer.

Circuit Description

System turn-on and turn off voltages

The Controller has an input pin for Under-Voltage Lock-Out (UVLO), which is not used on this board. For precise control of low-input on and off voltages, UVLO can be connected to the input voltage through a resistor divider. The Controller shuts down gracefully if UVLO is less than 5V.

Soft start

C1 sets a controlled ramp of the power-switching duty cycle for soft start on power up or after an overload shutdown. A 0.068 μ F capacitor sets the soft-start time (t_{SS}) at approximately 25 ms:

$$t_{SS} = (385k\Omega)(C1)$$

The soft start time should be much longer than the voltage feedback cutoff frequency set by R23, R25, and C24. With active circuitry in the feedback loop, soft start will only be effective over a limited range near the desired output voltage.

MOSFET dead time

R5 can be used to program the “dead time,” which is the minimum time between one of the Q2 or Q3 power-control MOSFETs turning off and the other turning on. This ensures both push-pull MOSFETs are not on at the same time at high duty cycles. The resistor is omitted in this demonstration because it does not normally run at high duty cycles, so the dead time is the Controller’s default.

Current limiting

R19 sets cycle-by-cycle current limiting, as well as “hiccup mode” short-circuit protection, where the controller resets and initiates a soft-start cycle. The 0.033 Ω value sets cycle-by-cycle MOSFET current limits (I_{C-C}) at approximately 9 A, which provides some margin above peak operating currents. The controller sets the short-circuit protection (I_{SCP}) at twice the cycle-by-cycle limit, or 18 A in this case. The current limit calculations are:


$$I_{C-C} = \frac{0.3V}{R19} \quad I_{SCP} = \frac{0.6V}{R19}$$

Synchronous Rectification

The controller turns on synchronous rectification MOSFETs Q1 and Q4 in synchronization with the power-control MOSFETs. This means the MOSFETs are on when their drain voltages are positive. This synchronous rectification is more efficient than diode rectification because it eliminates diodes’ inherent forward voltage losses.

[continued after schematic...]

Isolated Switch-Mode Power Supply Schematic

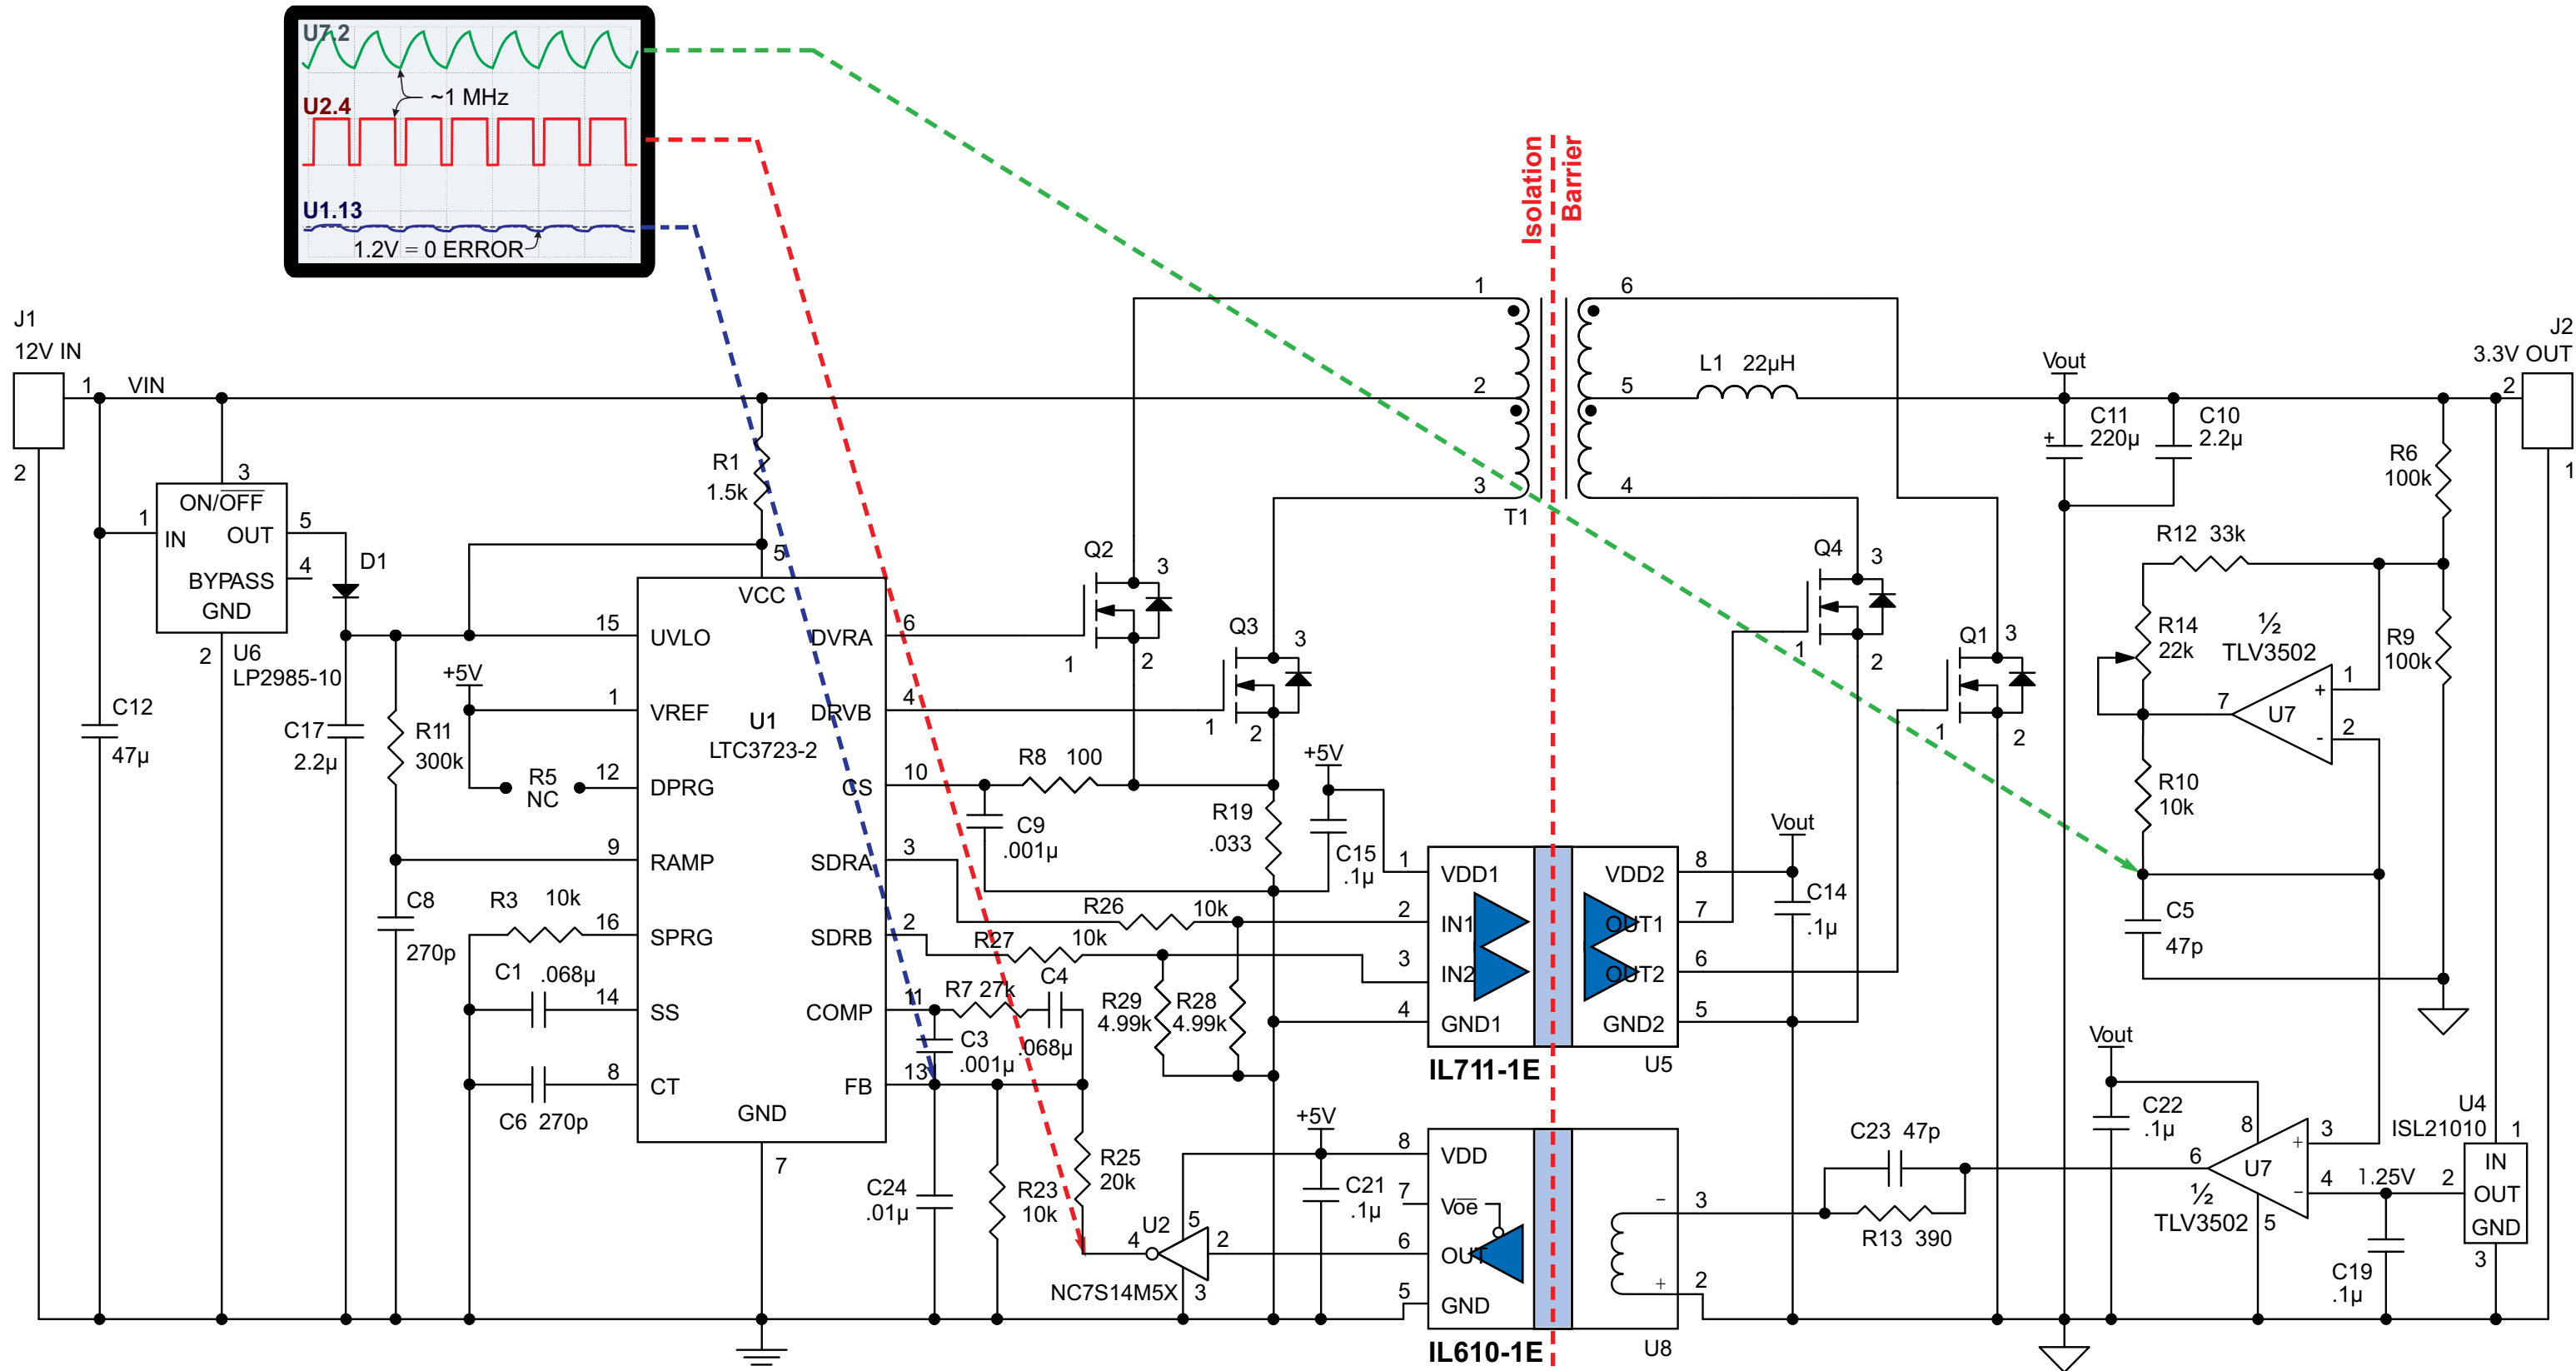

Circuit Description

Synchronous rectification isolation

An IL711V-1E two-channel isolator (U5) isolates the MOSFETs from the controller. The isolator's low pulse-width distortion minimizes deadtime and maximizes efficiency. Its speed also enables higher switching frequencies, which allows smaller inductive elements. High isolator drive capability allows-high gate-charge MOSFETs.

MOSFET turn-off delay

The delay between power-control synchronous rectifier MOSFET turn-offs can be adjusted from approximately 20 ns to 200 ns with R3 values of 10 kΩ to 200 kΩ. The delay can optimize efficiency by compensating for MOSFET speeds and inductive phase shifts. This demonstration uses just a 20 ns delay because it has fast MOSFETs and a relatively small transformer.

Voltage Control

The output supply voltage is determined by three voltage references and several resistors. The references are 1.2 V and 5 V controller references (V_{FB} and V_{REF}), and a separate 1.25 V output-side reference (V_{U4}). The critical voltage dividers are R6, R9, and R12, which scales the sawtooth waveform; and R23/R25, which scales the isolated voltage feedback signal.

Half of U7 forms a relaxation oscillator with a sawtooth waveform amplitude proportional to the supply voltage. It is also the pulse-width modulation time base. R6 and R9 are equal to center the waveform. The peak-to-peak sawtooth amplitude is set by R12 (a trimmer in series with R12 on this board can be used to adjust the output voltage):

$$V_{U7.2(P-P)} = V_{OUT} [1 - R12/(R9/2 + R12)]; \quad R6 = R9$$

The other half of U7 compares the sawtooth to the reference to create a pulse-width modulated signal that follows the output voltage. The sawtooth amplitude and the reference voltage determine the feedback control range. The minimum control voltage (where the feedback duty cycle is zero) and maximum control range (100% duty cycle), are calculated as follows:

$$V_{OUT(MIN)} = V_{U4} (R9 + 2R12)/(R9 + R12); \quad V_{U4} = 2.5 \text{ V}; \quad R6 = R9$$

$$V_{OUT(MAX)} = V_{U4} (2 + R9/R12); \quad V_{U4} = 2.5 \text{ V}; \quad R6 = R9$$

This oscillator circuit has a wide control range. For this demonstration, the minimum control range was set at approximately 2.8 V, and the maximum is nearly 9 V, which is well beyond the range of interest. The voltage-feedback pulse-width modulation frequency is approximately 1 MHz, calculated as follows:


$$f_{U7.6} = \frac{1}{2(R10)(C5)[\ln(1+R9/R12)]}; \quad R6 = R9$$

Circuit Description

The exact frequency is not critical because the output voltage is encoded as duty cycle. The U7 output duty cycle varies with the output voltage according to the following relationship:

$$\delta_{U7.6} = 0.5 + \frac{\ln(V_{OUT}/V_{U4} - 1)}{2 \ln(1 + R9/R12)} ; V_{U4} = 1.25 \text{ V}; R6 = R9$$

The following graph shows that relationship:

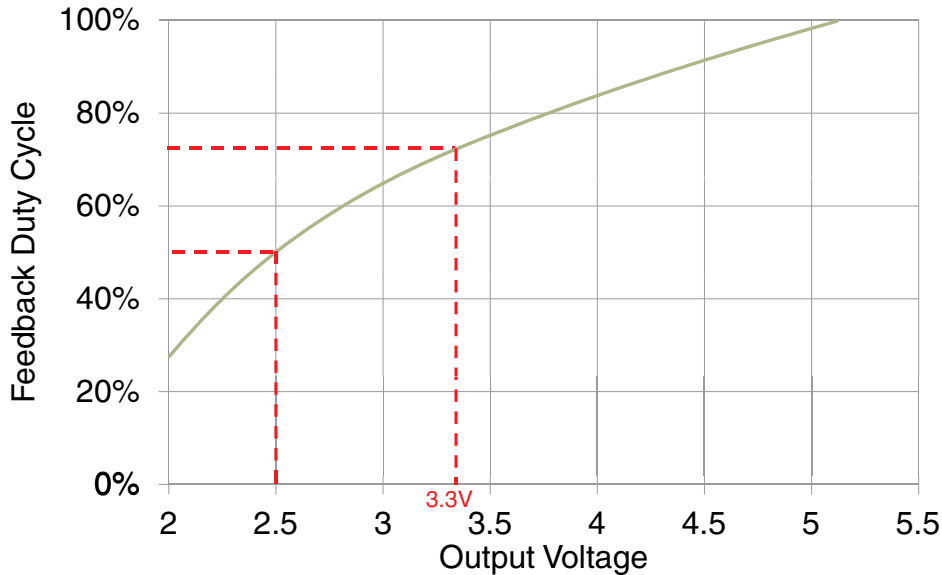

As shown in the figure above, The duty cycle is 50% when the output voltage is twice the output-side reference voltage, or 2.5 V. The components in this board set the duty cycle at approximately 70% at the 3.3 V output target. Because it is part of a closed-loop system, duty-cycle nonlinearity does not degrade accuracy, and the circuit is simpler than high-linearity pulse-width modulators.

Feedback isolation

The pulse-width modulated feedback signal is isolated by an IL610-1E single-channel MSOP isolator (U8), which is smaller and longer life than analog optocouplers commonly used for this purpose. Unlike most digital isolators, the IL610 is inherently failsafe, and guarantees a high output when there is no coil current. The output of Invertor U2 will then be low with no coil current, so the controller will call for power.

The (-) isolator coil terminal is used as the input, so that the isolator is configured as an inverter. The inverted configuration ensures the U2 output phase is the same as the output of comparator U7. The isolator coil resistor (R13) is selected to provide at least the 5 mA minimum DC Input Threshold at the minimum operating voltage of 2.8 V for the output circuitry. C3 is a “boost capacitor” that ensures the isolator turns on under marginal conditions.

Circuit Description

R23, R25, and C24 scale and filter the isolated PWM signal to convert it back to an isolated feedback voltage for the controller. A more sophisticated filter or faster feedback components can be used for applications requiring faster transient response. The Controller's 5 V reference powers the inverter, so the feedback voltage is proportional to the 5 volt reference and the duty cycle, scaled by the R23 and R25 voltage divider:

$$V_{U1.13} = \delta_{U7.1} (V_{REF})(R23)/(R23 + R25); \quad V_{REF} = 5V$$

Setting the output voltage

A voltage-mode PWM Controller version is used for U1 because it is compatible with pulse-width modulation of the feedback voltage. The Controller compares the feedback voltage to an internal 1.2 V reference (V_{FB}). Since the average feedback voltage should be 1.2 V at the desired 3.3 V output:

$$\delta_{VOUT} = V_{FB} / V_{REF}; \quad V_{FB} = 1.2V; \quad V_{REF} = 5V$$

The feedback duty cycle at the desired 3.3 V is approximately 70% in this case, calculated from the previous equation for $\delta_{U7.1}$. R23 and R25 can then be used to set the output voltage:

$$R25/R23 = \delta_{VOUT} (V_{REF}/V_{FB}) - 1; \quad V_{REF} = 5V; \quad V_{FB} = 1.2V$$

A trim resistor on the output side can adjust the output for demonstration purposes. Optional R23 can be used to form a voltage divider for another means of adjustment.

Filtering and Frequency Compensation

Output filter

The output capacitor filters out ripple. In this design there are two primary ripple sources, the synchronous rectification and the PWM voltage feedback. Synchronous rectification ripple is inversely proportional to twice the switching frequency (because full-wave rectification is used). Ignoring the ripple reducing effects of L1, the synchronous rectification output ripple component is estimated as follows:

$$V_{RIPPLE-SWITCH} = I_{LOAD} / [(C11)(2f_{SWITCH})]$$

A 220 μ F capacitor (C11) with the 130 kHz switching frequency provides ripple of less than 10 mV at a 500 mA load. A parallel low-ESR capacitor (C10) minimizes ripple from inductive current changes.

PWM signal filter

R25 and C24 filter the isolated PWM signal and help ensure system closed-loop stability. The filter reduces PWM-induced ripple and error amplifier noise. However, the time constant also limits transient response time.

Circuit Description

The filter cutoff frequency is well above the output filter and controller compensation cutoff frequencies so the closed-loop control is fast enough for stability. For the simple single-pole filter, the ripple in the PWM signal is approximately:

$$V_{\text{RIPPLE-U1.13}} = V_{\text{FB}} / (\tau_{\text{U1.13}} f_{\text{U7.1}}); \quad V_{\text{FB}} = 1.2 \text{ V}; \quad \tau_{\text{U1.13}} = (C24)[(R25)(R23)/(R25+R23)]$$

PWM ripple will be reflected to the output but reduced by the output filter capacitor:

$$V_{\text{RIPPLE-PWM}} = (V_{\text{RIPPLE-U1.13}})(I_{\text{LOAD}}) / [(V_{\text{FB}})(f_{\text{U7.6}})(C11)]; \quad V_{\text{FB}} = 1.2 \text{ V}$$

A more sophisticated filter or higher frequency feedback can be used for faster transient response.

Error amplifier gain

The controller error amplifier gain at AC frequencies well above the amplifier compensation cutoff frequency is:

$$A_{\text{ERROR-AC}} = R7 / R25$$

Higher gain provides less steady-state error at the expense of gain margin and therefore stability.

Controller compensation

(R7)(C4) improves accuracy and stability by increasing the DC gain. Filters created by (R23||R25)(C24) and (R7)(C3) limit high-frequency gain to reduce ripple and improve noise immunity.

Level shifting

System components run on three different supplies: the 9.3 V nominal controller supply, the 5 V controller reference supply, and the 3.3 V supply output. The controller's synchronous rectifier driver voltage can go as high as the controller supply, but the U5 isolator is powered from the 5 V primary-side reference supply. Therefore voltage dividers keep the isolator inputs below 5 V but above their 2.4 V minimum Logic High Input Voltage.

The synchronous rectifier MOSFETs are driven by the 3.3 V side of U5, so the MOSFETs are selected for a gate-source threshold voltage of well below 3.3 V. The isolator also provides inherent level shifting between the 3.3 V feedback signal and the 5 V reference supply.

Maintaining Creepage


Creepage distances are often critical in power supplies circuits. In addition to meeting JEDEC standards, NVE isolator packages have unique creepage specifications. Recommended pad layouts are included in the isolator datasheets. Standard pad libraries, especially MSOPs, sometimes extend under the package, compromising creepage and clearance. Ground and power planes are also spaced to avoid compromising clearance.

One- and Two-Channel IL700-Series Isolators


Award-winning IsoLoop® IL700-Series Isolators are ideal for switch-mode power supplies because of their high speed, small size, low EMI, and high reliability. Two-channel isolators are popular choices for SMPS.

All IsoLoop Isolators have a unique polymer-ceramic composite isolation barrier for a remarkable 44000-year barrier life.


Various grades, channel configurations and packages are available.

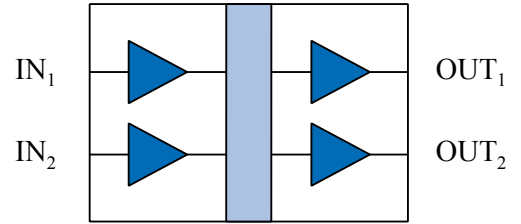


IL711

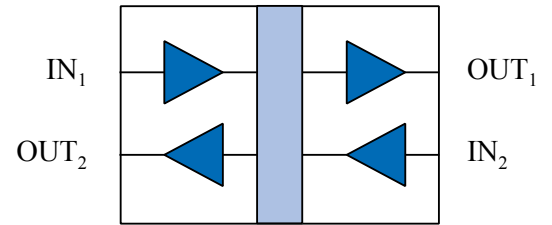


IL712

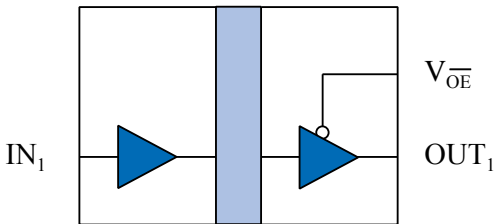

IL710

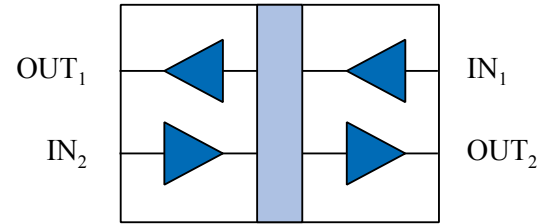

IL721


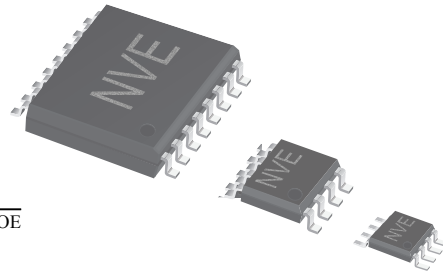


| IsoLoop® Model | Transmit/Receive Channels | Isolation (per UL1577) | Max. Temp. | Key Features | Package |
|----------------|---------------------------|------------------------|------------|--------------------|-------------|
| IL710V-1E | 1/0 | 2500 V _{RMS} | 100°C | Ultraminiature | MSOP8 |
| IL711V-1E | 2/0 | 2500 V _{RMS} | 100°C | Ultraminiature | MSOP8 |
| IL712V-1E | 1/1 | 2500 V _{RMS} | 100°C | Ultraminiature | MSOP8 |
| IL710T-3E | 1/0 | 2500 V _{RMS} | 125°C | High Temperature | SOIC8 |
| IL711T-3E | 2/0 | 2500 V _{RMS} | 125°C | High Temperature | SOIC8 |
| IL712T-3E | 1/1 | 2500 V _{RMS} | 125°C | High Temperature | SOIC8 |
| IL721T-3E | 1/1 | 2500 V _{RMS} | 125°C | High Temperature | SOIC8 |
| IL711VE | 2/0 | 5000 V _{RMS} | 125°C | True 8 mm Creepage | 0.3" SOIC16 |
| IL721VE | 1/1 | 5000 V _{RMS} | 125°C | True 8 mm Creepage | 0.3" SOIC16 |


Visit www.nve.com for datasheets.

One- and Two-Channel IL600 Failsafe Isolators


Unique IL600-Series Isolators are inherently failsafe with passive inputs similar to LED-input optocouplers. Inputs can be configured for inverting or non-inverting. Parts are available in SOIC and unique MSOP packages, as well as bare die for chip-on-board assembly. Unlike optocouplers, all IsoLoop Isolators have a unique polymer-ceramic composite isolation barrier for a remarkable 44000-year barrier life.

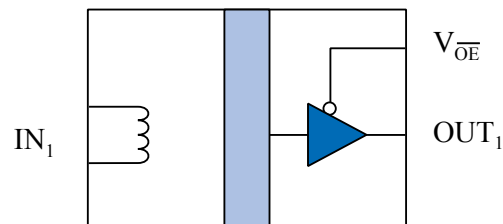

IL610

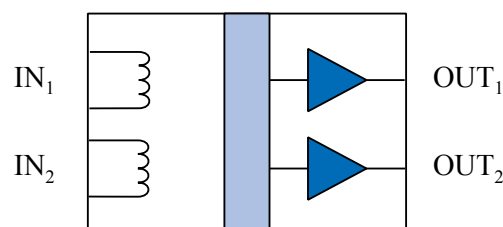

IL611

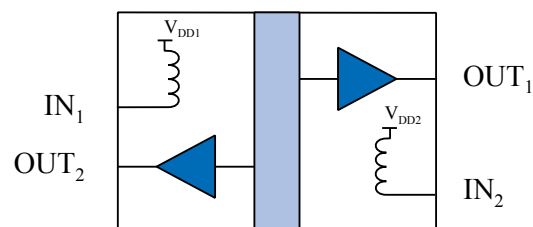

IL612

| IsoLoop® Model | Transmit/Receive Channels | Isolation (per UL1577) | Max. Temp. | Key Features | Package |
|----------------|---------------------------|------------------------|------------|--------------------------|---------|
| IL610-1E | 1/0 | 1200 V _{RMS} | 85°C | Failsafe; Ultraminiature | MSOP8 |
| IL611-1E | 2/0 | 1200 V _{RMS} | 85°C | Failsafe; Ultraminiature | MSOP8 |
| IL612-1E | 1/1 | 1200 V _{RMS} | 85°C | Failsafe; Ultraminiature | MSOP8 |
| IL610-3E | 1/0 | 2500 V _{RMS} | 85°C | Failsafe | SOIC8 |
| IL611-3E | 2/0 | 2500 V _{RMS} | 85°C | Failsafe | SOIC8 |
| IL612-3E | 1/1 | 2500 V _{RMS} | 85°C | Failsafe | SOIC8 |

Visit www.nve.com for datasheets.

Limited Warranty and Liability

Information in this document is believed to be accurate and reliable. However, NVE does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. In no event shall NVE be liable for any indirect, incidental, punitive, special or consequential damages (including, without limitation, lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Right to Make Changes

NVE reserves the right to make changes to information published in this document including, without limitation, specifications and product descriptions at any time and without notice.

Use in Life-Critical or Safety-Critical Applications

Unless NVE and a customer explicitly agree otherwise in writing, NVE products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical devices or equipment. NVE accepts no liability for inclusion or use of NVE products in such applications and such inclusion or use is at the customer's own risk. Should the customer use NVE products for such application whether authorized by NVE or not, the customer shall indemnify and hold NVE harmless against all claims and damages.

Applications

Applications described in this document are illustrative only. NVE makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NVE products, and NVE accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NVE product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customers. Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. NVE does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customers. The customer is responsible for all necessary testing for the customer's applications and products using NVE products in order to avoid a default of the applications and the products or of the application or use by customer's third party customers. NVE accepts no liability in this respect.

An ISO 9001 Certified Company

NVE Corporation
11409 Valley View Road
Eden Prairie, MN 55344-3617

©NVE Corporation

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

Manual No.: ISB-CB-014

April 2015