



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



TAA-Compliant SNMPWEBCARD for remote monitoring and control via SNMP, Web or telnet

MODEL NUMBER: **SNMPWEBCARDTAA**

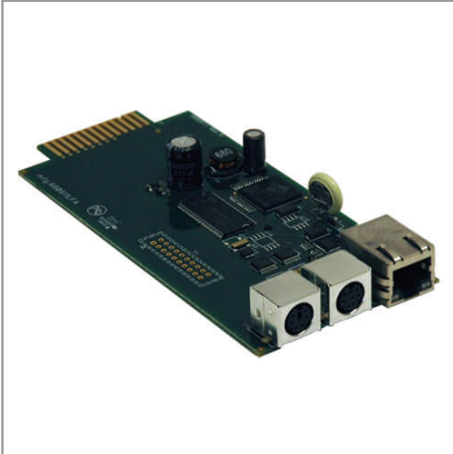

Description

Tripp Lite's SNMPWEBCARDTAA allows network users to operate any expansion slot-equipped Tripp Lite SmartPro or SmartOnline UPS as a managed device on the network. Enables remote monitoring and control of UPS and site electrical conditions using the SNMP network management platform or a web browser. Provides remote viewing of site electrical data, UPS status information and self-test logs. Supports selective rebooting of locked network equipment without disrupting power to other devices when used with customized load management receptacles available on select Tripp Lite UPS systems. Optional ENVIROSENSE module provides remote temperature/humidity monitoring and a dry contact interface to control and monitor alarm, security and telecom devices. NEW firmware version 12.06.0064 now available! Firmware is not applicable with cards running firmware version 12.04.0047 or earlier. NOTE: Existing 12.04.0048 and 12.04.0049 cards must be upgraded to the 12.04.0055 firmware prior to upgrading to 12.06.0061 and 12.06.0064.

Features

- NEW firmware web-only version 12.06.0064 now available!
- Graphical User Interface supports Java 1.6 and 1.7 runtime environments
- Compliant with the Federal Trade Agreements Act (TAA) for GSA Schedule purchases
- Makes any slot-equipped Tripp Lite UPS a managed device on the network, controllable using SNMP network management platforms or a web browser
- Web interface provides remote viewing of current site electrical data, UPS self-test and alert logs, as well as logged power events such as blackouts, brownouts, overvoltages, and other electrical problems
- Offers the ability to control UPS output power and remote reboot of locked network devices without interrupting power to other loads when used with any Tripp Lite UPS equipped with load management receptacles
- DHCP/Manual configuration support provides the ability to have network settings automatically assigned

Highlights

- NEW firmware version 12.06.0064 now available!
- Supports secure file transfer
- Supports SNMPv3, including SNMPv3 traps
- Java 6 and 7 WebUI support
- Improved performance
- Supports IPv6
- RADIUS Support (FreeRADIUS, TekRADIUS)
- Data and event logs can be setup to automatically send the log via email or HTTP post when the configurable log size (64-2048) is reached
- Enhanced Remote Syslog capability to define if event, data or accounting entries should be sent
- CLI interface that allows control and configuration through a network CLI interface, SSH or Telnet, or through a SNMPWEBCARD's serial configuration port
- Event actions
- Individual outlet events

System Requirements

- Tripp Lite UPS/PDU with SNMPWEBCARDTAA running Version 12.04.0055
- FTP utility
- Web browser
- Java Runtime Environment 1.6.026 or later
- Firmware is not applicable with cards running firmware version



to the card, or manually assigned via permanent IP addresses

- 10/100 Mbps auto-sensing allows optimal communication compatibility with your current 10/100 Base-T network
- Real-time clock support maintains the time of day and date even if the UPS is shut down
- NTP (Network Time Protocol) support gives the card the ability to receive automatic updates to its real-time clock from a NTP server
- 2-tier level access allows an administrator and a guest to log into the web browser for monitoring and/or management of slot-equipped Tripp Lite UPS systems
- Multiple user support allows for viewing by a number of users at the same time
- Full Telnet access gives you the ability to remotely monitor and manage your UPS system via a TELNET session
- Optional SSL (Secure Socket Layer) security setting provides the capability to create an encrypted connection to the card via a web browser
- Offers the ability to shut down remote operating systems through your networks. (Supported operating systems must have Power Alert 12 installed. See PowerAlert section for software support)
- Alert notifications via email or SNMP traps give users the added advantage of having an immediate event notification sent to them as a result of a site electrical or UPS problem.
- Protocols supported include HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BOOTP, SCP
- RoHS Compliant

12.04.0047 or earlier. NOTE:
 Existing 12.04.0048 and
 12.04.0049 cards must be
 upgraded to the 12.04.0055
 firmware prior to upgrading to
 12.06.0061 and 12.06.0064.

Package Includes

- SNMPWEBCARDTAA
- Quick Start Installation Guide
- Configuration Cable
- Software CD including Owner's Manual & MIB files
- Cover Plates (secures card in UPS system's SNMP accessory slot)

Specifications

OVERVIEW	
UPC Code	037332153548
Power Management Type	Hardware
PHYSICAL	
Shipping Dimensions (hwd / in.)	2.400 x 6.400 x 6.800
Shipping Dimensions (hwd / cm)	6.10 x 16.26 x 17.27
Shipping Weight (lbs.)	0.7000
Shipping Weight (kg)	0.32
WARRANTY	
Product Warranty Period (Worldwide)	2-year limited warranty



Tripp Lite
1111 W. 35th Street
Chicago, IL 60609 USA
Telephone: 773.869.1234
www.tripplite.com

Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies:

<https://www.tripplite.com/products/product-certification-agencies>