



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SOM-3565


Intel® Atom™ Processor N2600 Qseven CPU Module

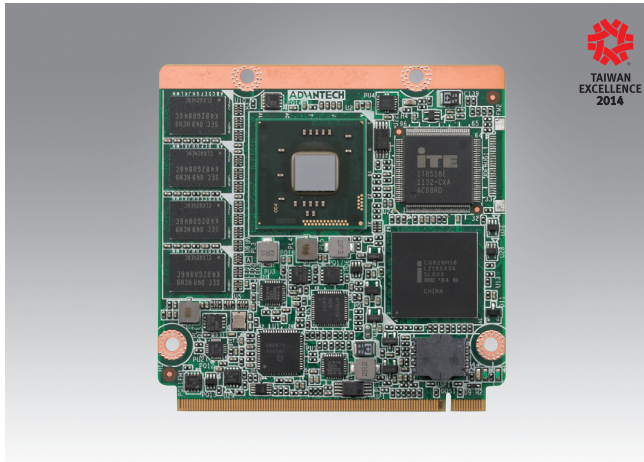

Features

- Embedded Intel® Atom™ Processor N2600 + NM10
- Intel® Gfx support DX9 and OpenGL 3.0
- Supports 18 bit LVDS
- Supports up to DDR3 2GB onboard memory
- Support 3 PCIe x1, 1 LPC, 2 SATAII, 8 USB2.0
- Supports iManager, SUSIAccess and Embedded Software APIs

Software APIs:




Specifications

Form Factor		QSeven R1.2
Processor System	CPU	Intel Atom Processor N2600 1.6 GHz, 1 MB L2 Cache
	System Chipset	NM10
	BIOS	AMI EFI 16 Mbit Flash BIOS
Memory	Technology	Support DDR3 800 MHz
	Max. Capacity	2 GB on board memory
Display	Chipset	Intel Gfx integrated in Atom Processor
	Graphic Engine	Intel Gfx 400 MHz for N2600, supports DX9, OpenGL 3.0, MPEG2/VC1/H.264 HW Decoder
	LVDS	18-bit up to 1366x768
	DDI	1 port for DisplayPort/ HDMI/ DVI HDMI 1920 x 1200 DVI 1920 x 1200 DisplayPort 1600 x 1200
	Dual Display	LVDS + DP/HDMI/DVI
Ethernet	Chipset	Intel 82574L Gigabit Ethernet
	Speed	10/100/1000 Mbps
WatchDog Timer		65536 level timer interval, from 0~65535 sec, multi-level, multi-option watchdog timer
Expansion		3 PCIe x1 (Option for 4 PCIe x1), LPC, SMBus, I2C Bus
I/O	SATA	2 SATAII (300 MB/s) (option for 1 SATAII and 1 on-board SSD)
	USB	8 USB 2.0
	Audio	High definition audio interface
	GPIO*	8 Bits
Power	Power Type	ATX, AT
	Power Supply Voltage	5V/ 5V standby
	Power Consumption (Max.)	+5 V @ 1.6 A
	Power Consumption (Idle)	+5 V @ 0.99 A
Environment	Operating Temperature	0 ~ 60° C (32 ~ 140° F)
	Humidity	Operating: 40° C @ 95% relative humidity, non-condensing Storage: 60° C @ 95%relative humidity, non-condensing
Mechanical	Dimensions	70 x 70 mm (2.75" x 2.75")

* GPIO is not in Q7 specification, this is an additional function in SOM-3565.

Block Diagram

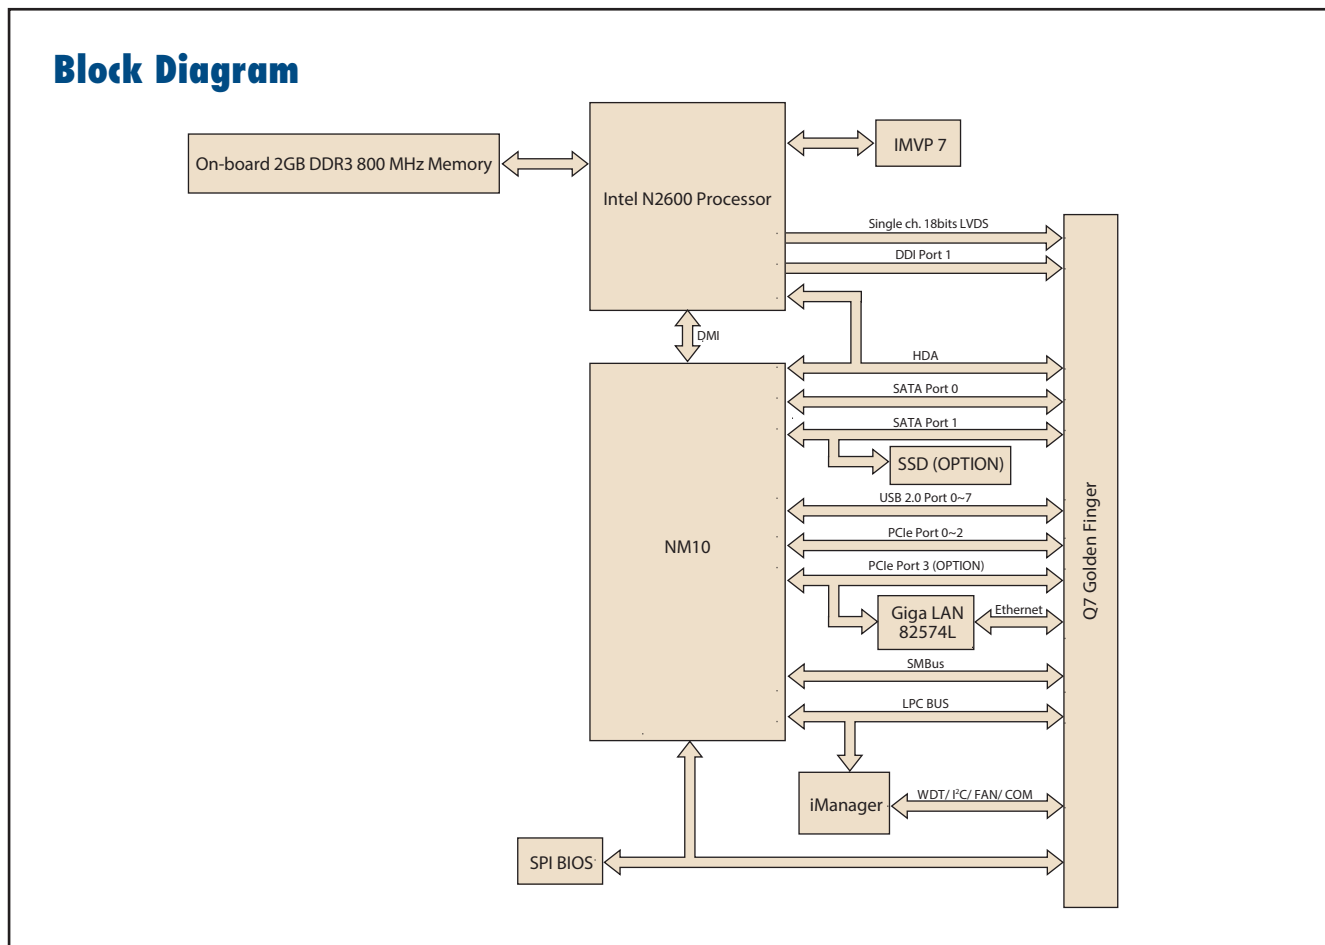

Ordering Information

Part No.	CPU	L2 Cache	PCH	LVDS	RAM	SSD	DDI	PCIe	Giga LAN	HD Audio	USB2.0	SATAII	LPC	I ² C Bus	Power	Thermal Solution	Operating Temp.
SOM-3565M0-S6A1E	N2600 1.6 GHz	1 MB	NM10	18-bit	2GB	-	1	3	1	1	8	2	1	1	ATX/AT	Passive	0 ~ 60° C
SOM-3565M4-S6A1E	N2600 1.6 GHz	1 MB	NM10	18-bit	2GB	4GB	1	3	1	1	8	1	1	1	ATX/AT	Passive	0 ~ 60° C
SOM-3565M0Z-S6A1E	N2600 1.6 GHz	1 MB	NM10	18-bit	2GB	-	1	3	1	1	8	2	1	1	ATX/AT	Passive	-20 ~ 80° C
SOM-3565M0Z2-S6A1E	N2600 1.6 GHz	1 MB	NM10	18-bit	2GB	-	1	3	1	1	8	2	1	1	ATX/AT	Passive	-40 ~ 85° C

Note: Passive = fanless; Active = with fan

Development Board

Part Number	Description
SOM-DB3500G-00A1E	Qseven Development Board

Embedded OS

OS	Part No.	Description
WES7E	2070011754	WES7E SP1 32-bits SOM-3565 V5.1.4 ENG

Packing List

Part Number	Description	Quantity
	CPU module	1
1960057322N001	Heatspreader for regular temp sku	1
1960059823N001	Heatspreader for extended temp sku	

Optional Accessories

Part Number	Description
1960058145N001	Heatsink I-Cedarview-M-12W 70x63x13.2-SC
96LEDK-A084SV45NB2	8.4" LED PANEL 450N 800X600(G) G084SN05 V9
96LEDK-C150XG40NG1	15" LED PANEL 400N 1024X768(G) G150XGE-L04